PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 3856 IMPELLER PATTERN NO. 3802	THRUST CONSTANT 2·0 WR² .022 LB. FT²/STAGE	PUMP SHAFT DIAM. 3/4

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 5"

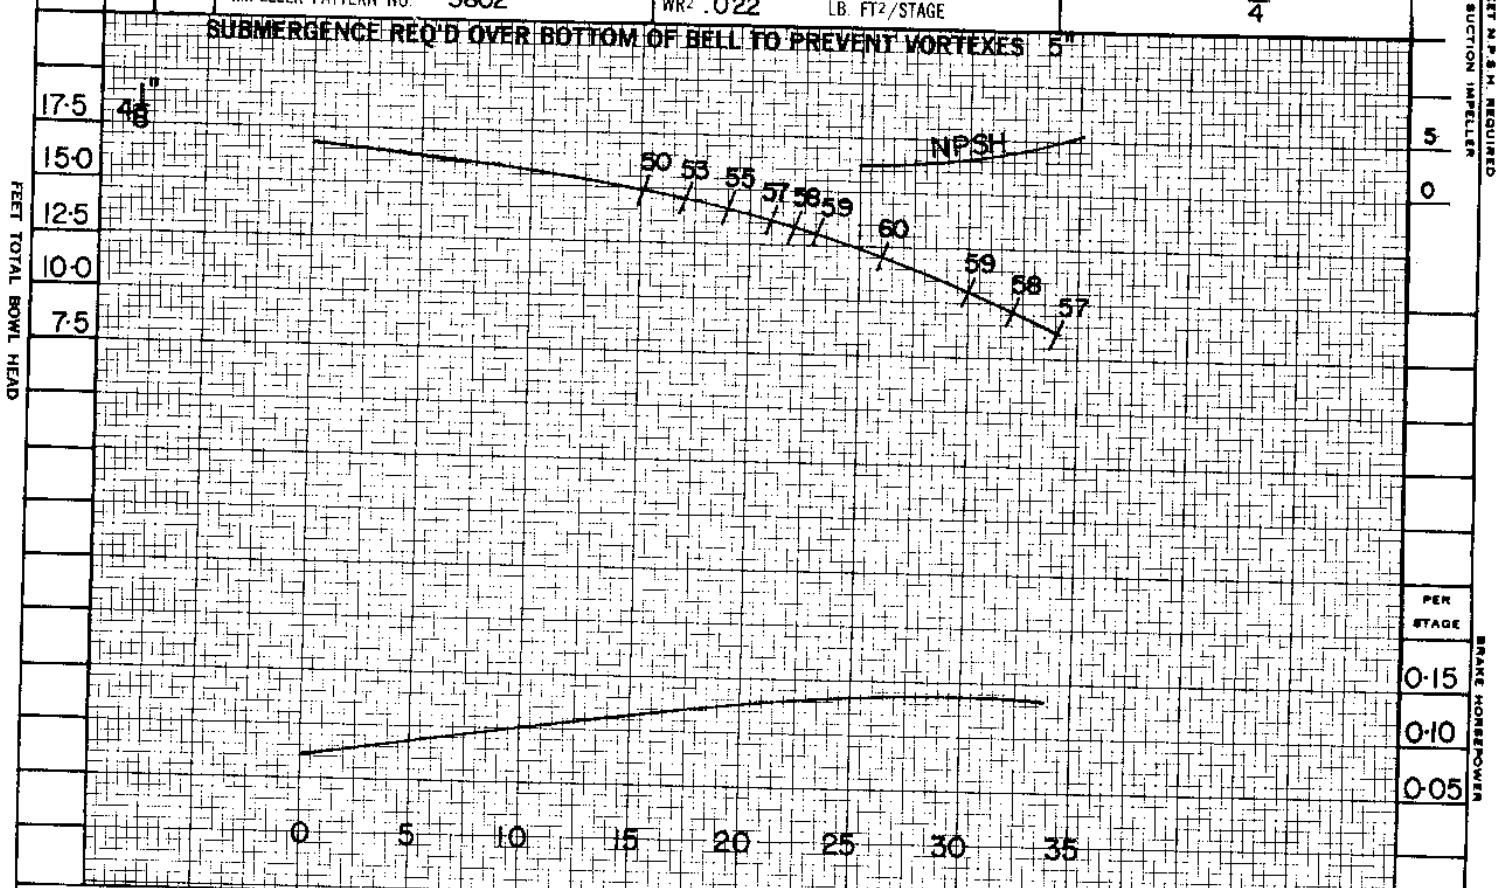

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR 1 0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95

FOR 5 STAGES MULTIPLY HD & EFF BY 0·99

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6AXS TURBINE PUMP
IMPELLER — BRONZE

1760 RPM
BOWL — CAST IRON
VIT. EN

CURVE SHEET NO
EC-0631

JP-1017