| PER STAGE | IMP. DIAM. EXIT | IMPELLER PART NO. 908<br>IMPELLER PATTERN NO. 164 | THRUST CONSTANT 3.2<br>WR² .030 LB. FT²/STAGE | PUMP SHAFT DIAM. 1" INCHES |
|---|---|---|---|---|

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 7"

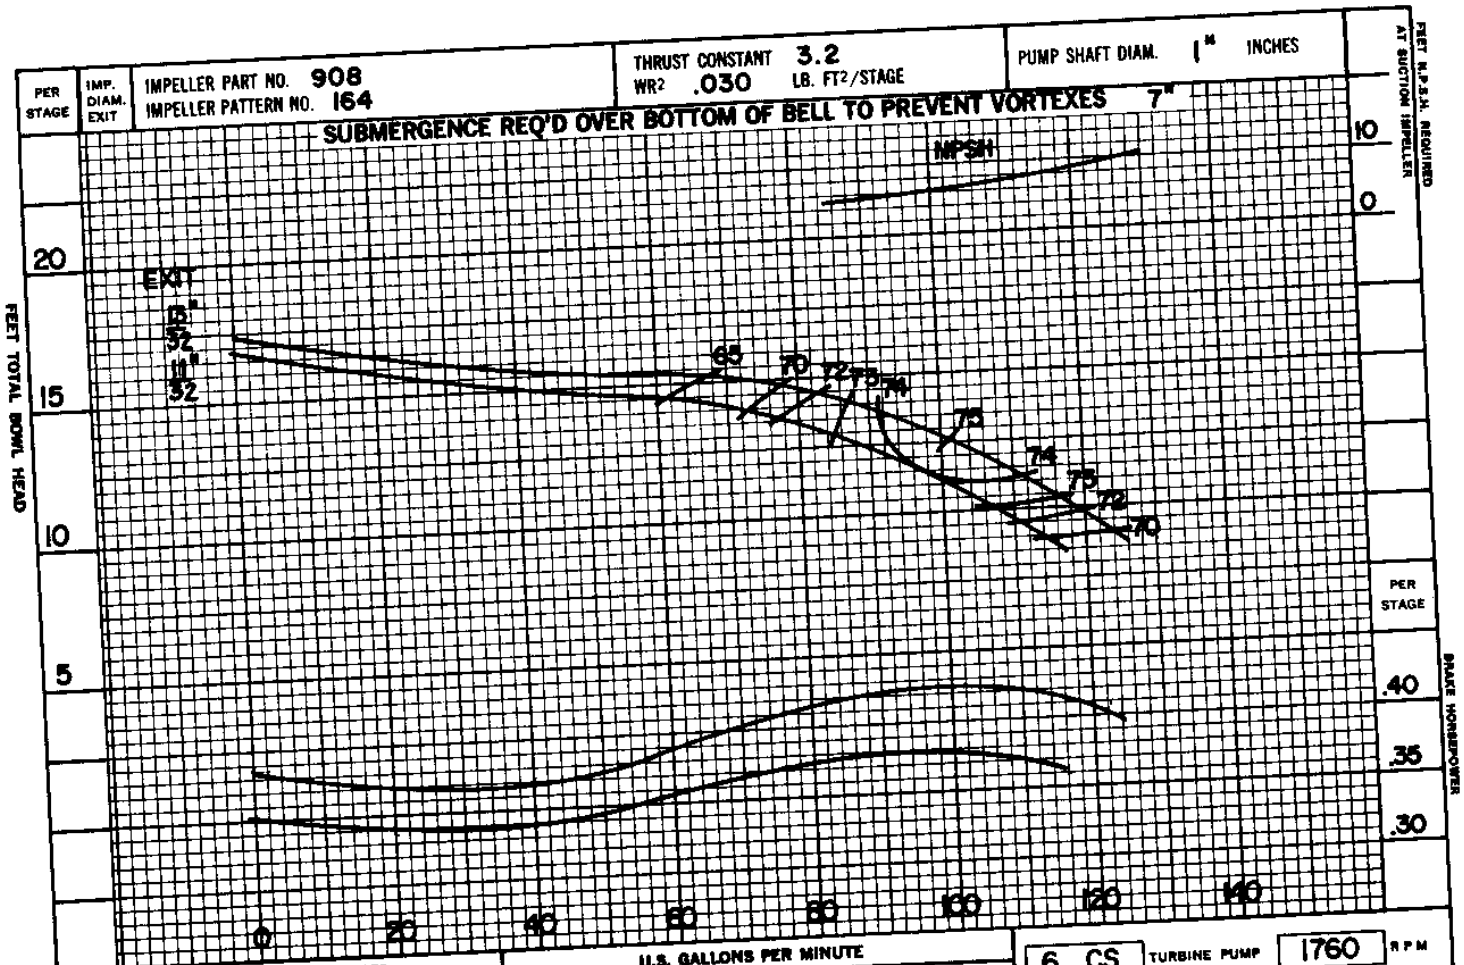


PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 5 STAGES MULTIPLY HD. & EFF. BY .99
DATE 11-18-86

**Johnston Pump Company**
Glendora, California 91740
ESTABLISHED 1909

6 CS TURBINE PUMP 1760 RPM
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2501

JP-341A