PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 17735	THRUST CONSTANT 3·5	PUMP SHAFT DIAM. $1\frac{3}{16}$
			IMPELLER PATTERN NO. 6610	WR² 0·090 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 8"

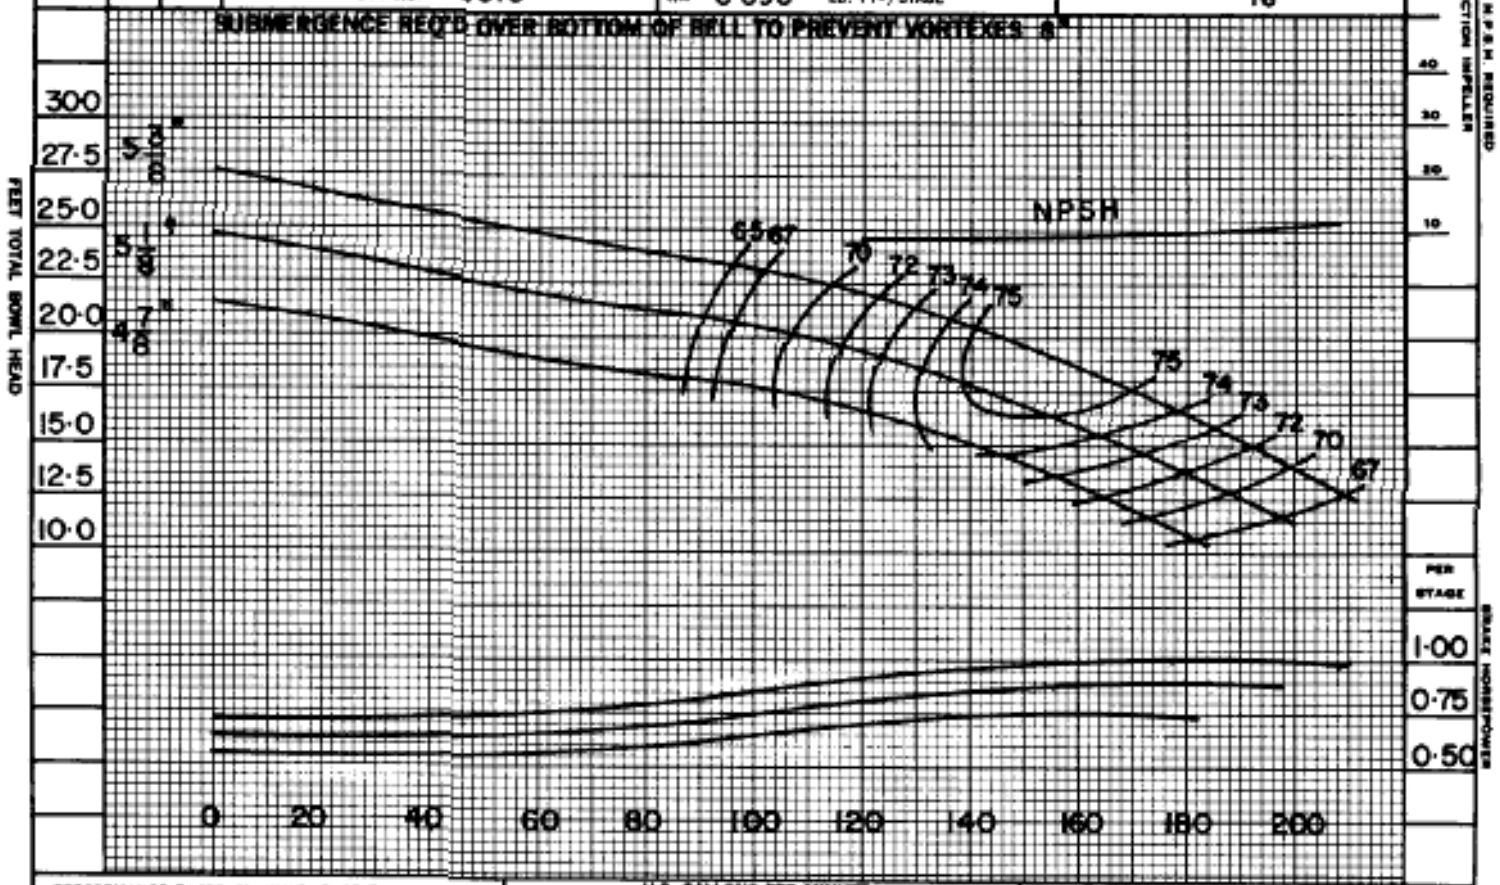

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95
FOR 2 STAGES MULTIPLY HD. & EFF. BY 0·98
DATE 10-27-72

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1906

7CC TURBINE PUMP
IMPELLER — BRONZE

1760 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO.
EC-0464

IP-1017