PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 26217	THRUST CONSTANT 20.0	PUMP SHAFT DIAM. 1"
			IMPELLER PATTERN NO. 2493	WR² 0·26 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 23 INCHES

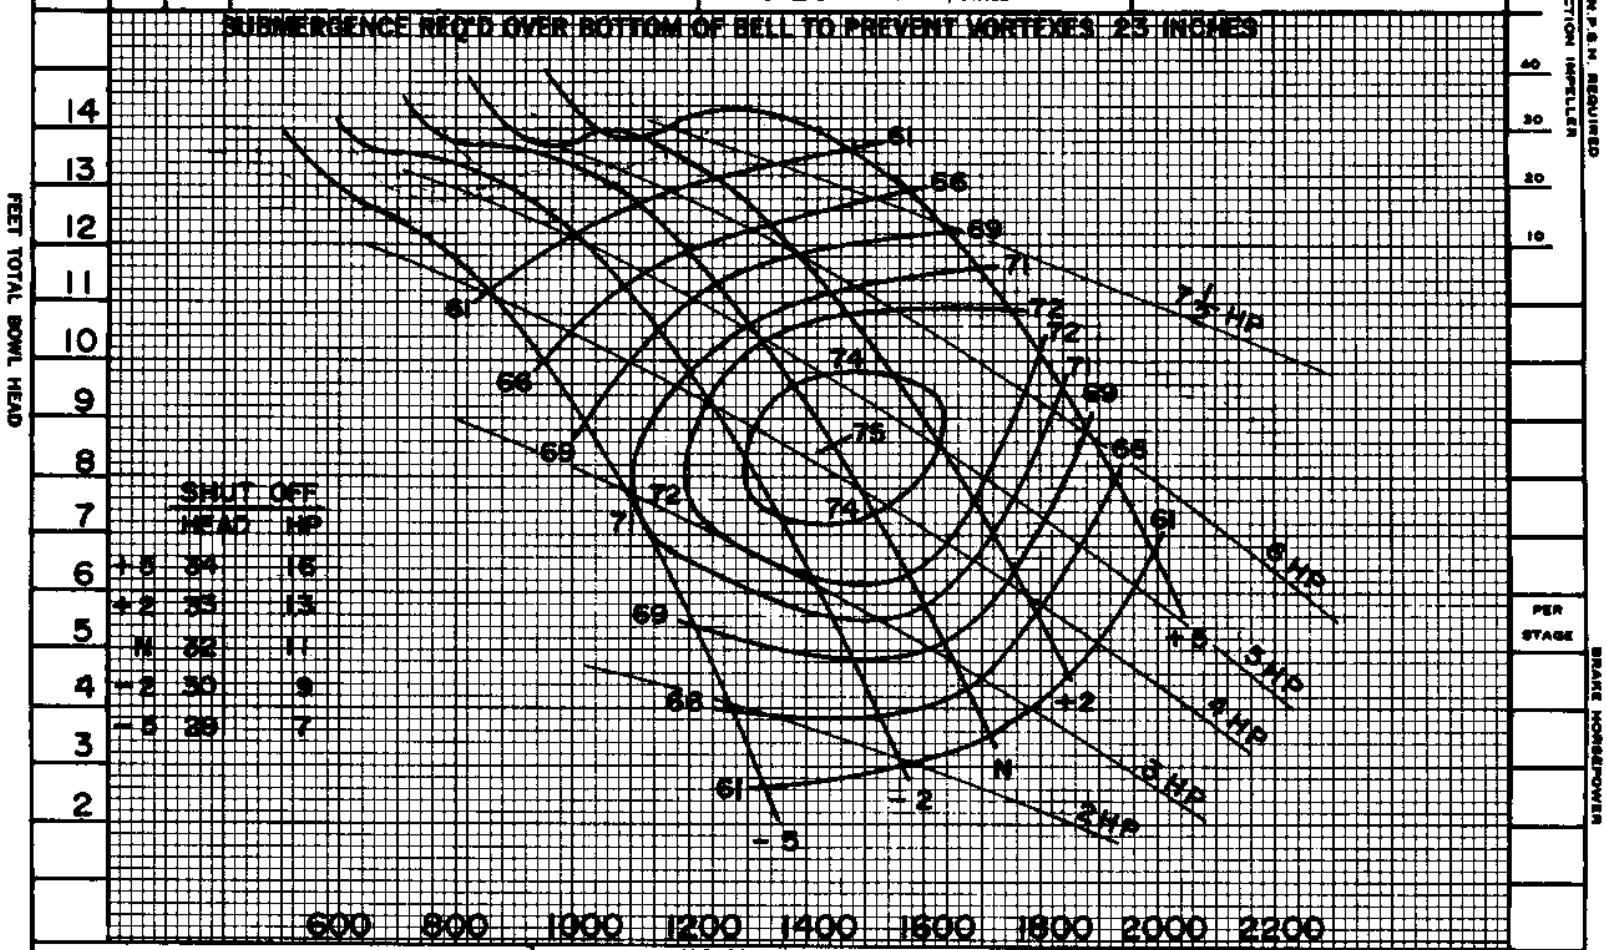

	SHUT OFF HEAD	HP
+5	34	16
+2	33	13
N	32	11
-2	30	9
-5	29	7

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 4-24-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

8 PO PROPELLER PUMP 1760 RPM

IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO. EC-0760

JP-1017