PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 45433 IMPELLER PATTERN NO. 45430	THRUST CONSTANT 8.0 WR^2 0.12 LB. FT^2/STAGE	PUMP SHAFT DIAM. $1\frac{1}{2}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 12"

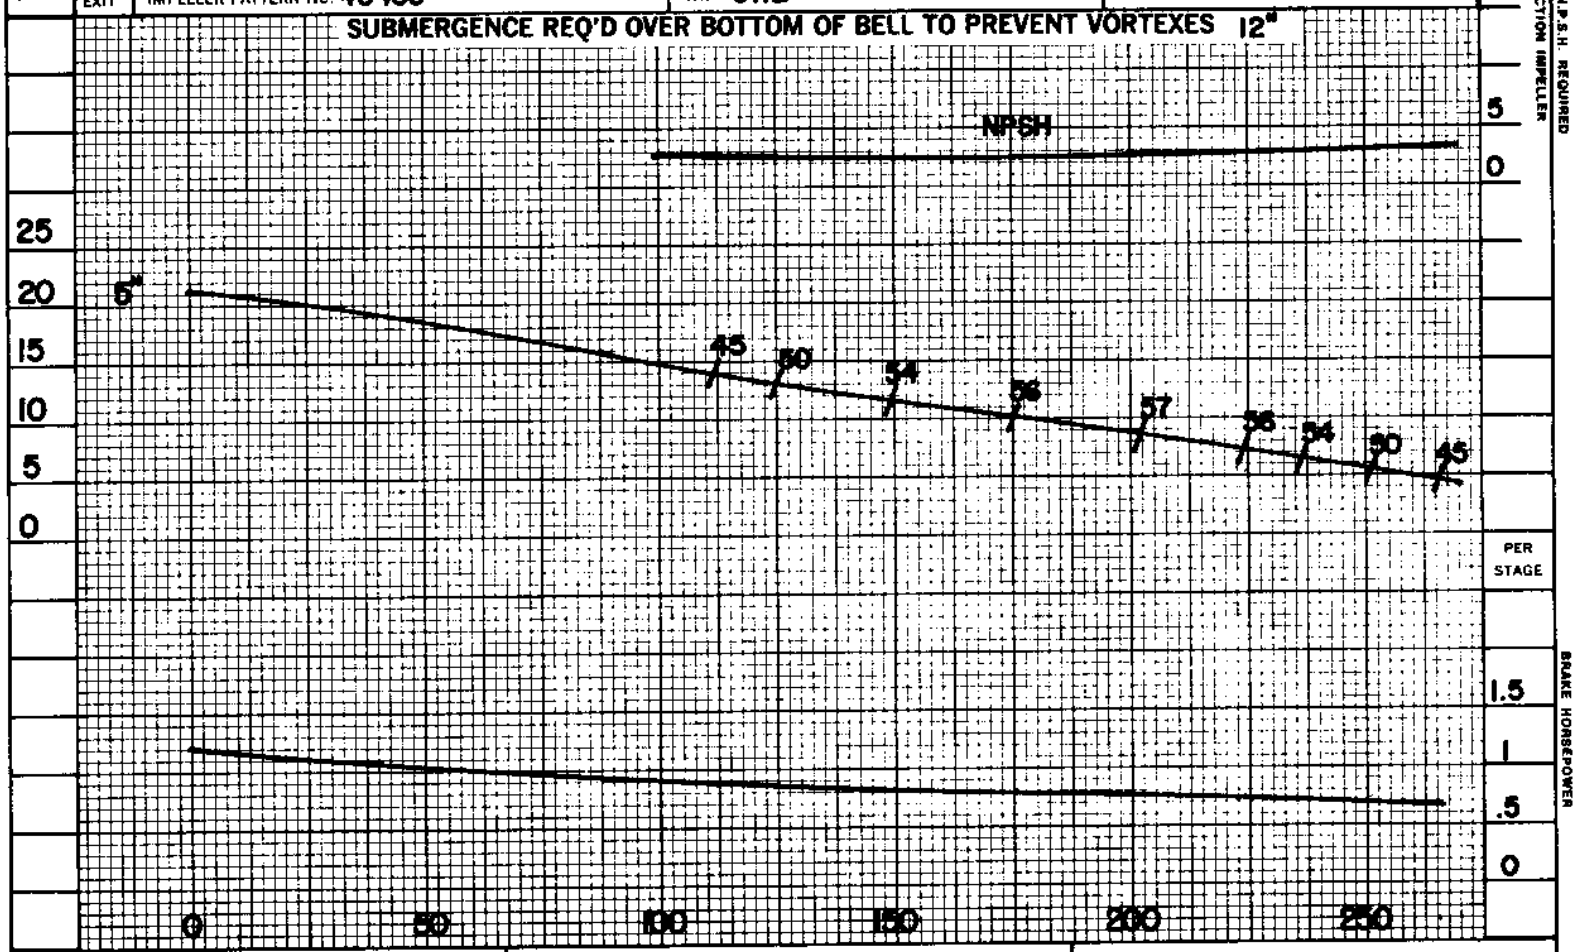

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR — STAGES MULTIPLY HD. & EFF. BY —
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

8 QLC
IMPELLER —
STAINLESS STL.

1770 RPM
BOWL — CAST IRON VIT. ENAMELED
CURVE SHEET NO.
EC-2190

JP 1124