PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT WR² 635 LB. FT²/STAGE	PUMP SHAFT DIAM. 6½" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 133"

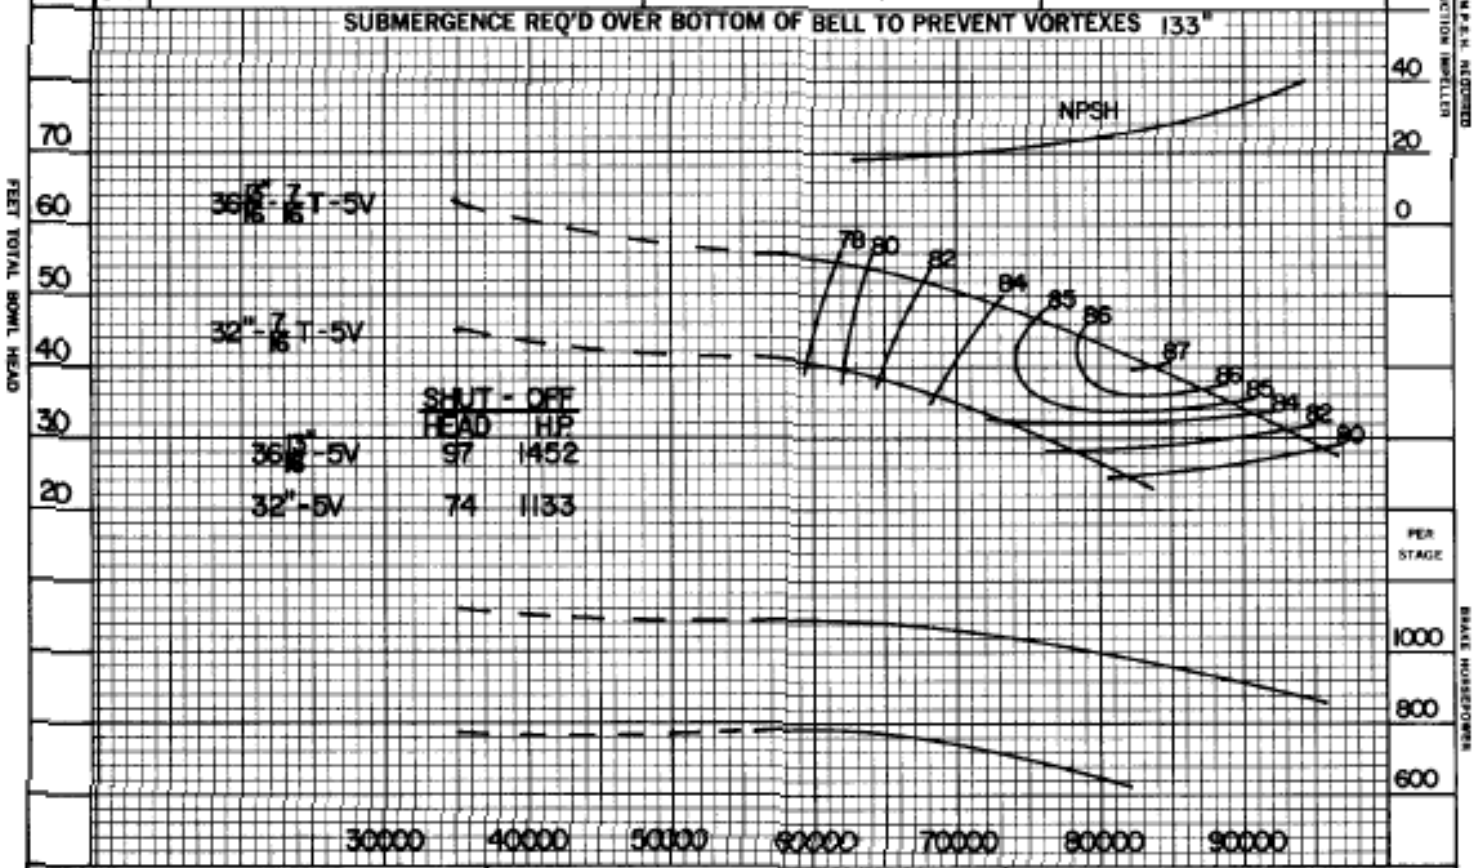

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 5-2-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1936

54 LS MIXED-FLOW PUMP 355 RPM

IMPELLER – BRONZE BOWL – CAST IRON

CLASS 'C' FIN.

CURVE SHEET NO. EC-2233

JP-341A