PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 43400 IMPELLER PATTERN NO. 43302	THRUST CONSTANT 6 WR² .83 LB. FT²/STAGE	PUMP SHAFT DIAM. 1 11/16" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 20"

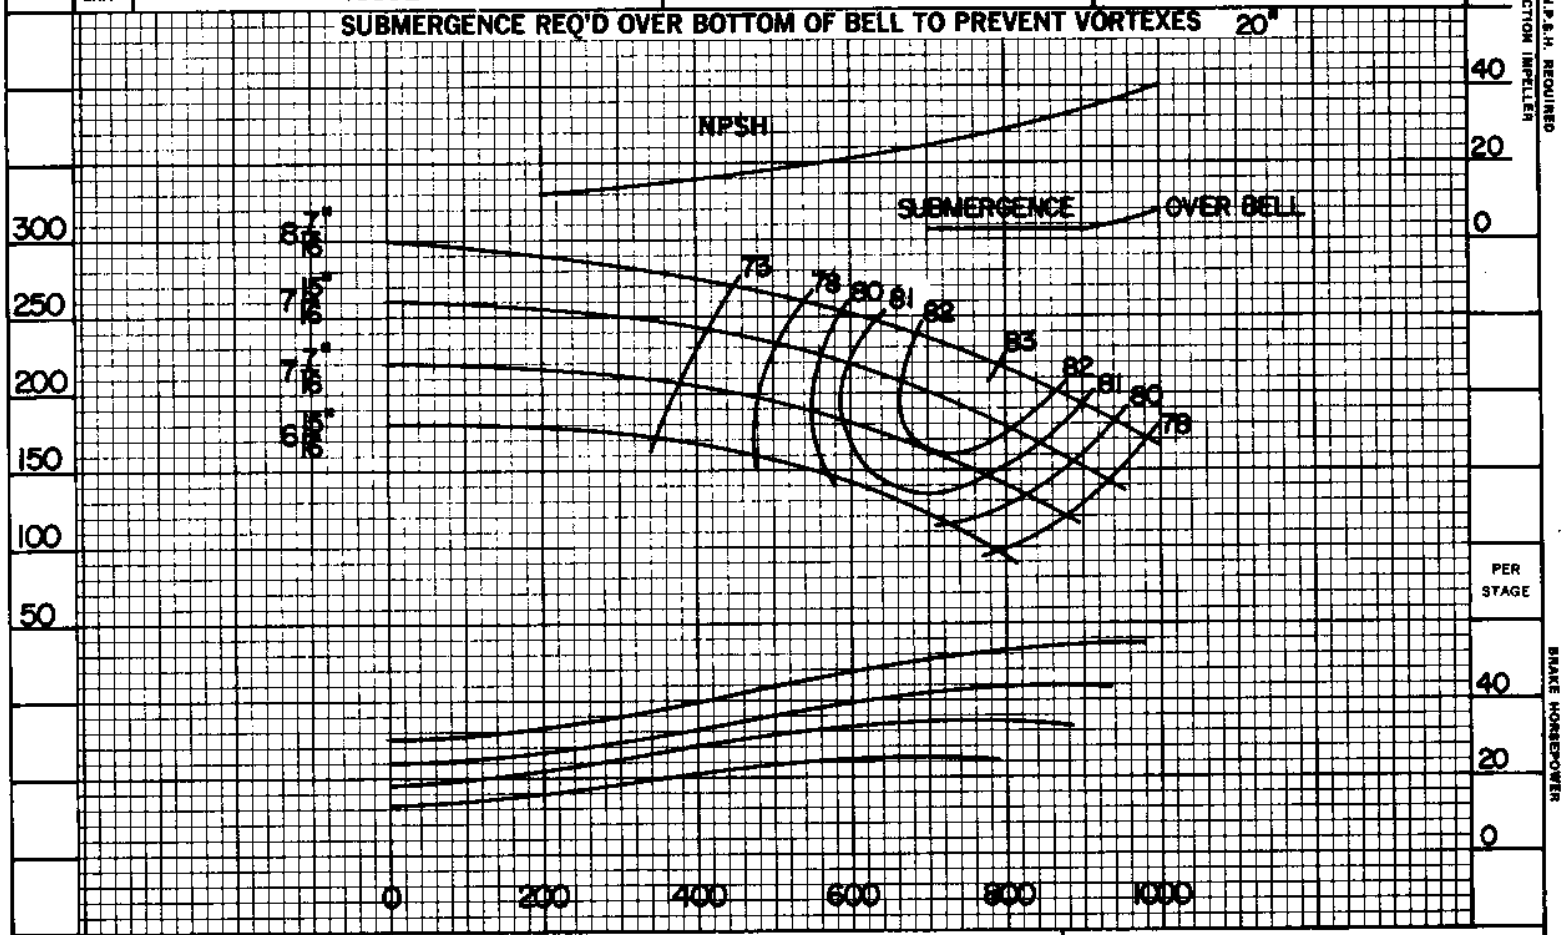

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .96
FOR 3 STAGES MULTIPLY HD. & EFF. BY .99
DATE 11-18-86

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

11 DLC
IMPELLER – BRONZE

3550 RPM
BOWL – CAST IRON
VIT. ENAMELED

CURVE SHEET NO.
EC-2652

JP-341A