PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 908 IMPELLER PATTERN NO. 164	THRUST CONSTANT 3.2 WR² .030 LB. FT²/STAGE	PUMP SHAFT DIAM. 1

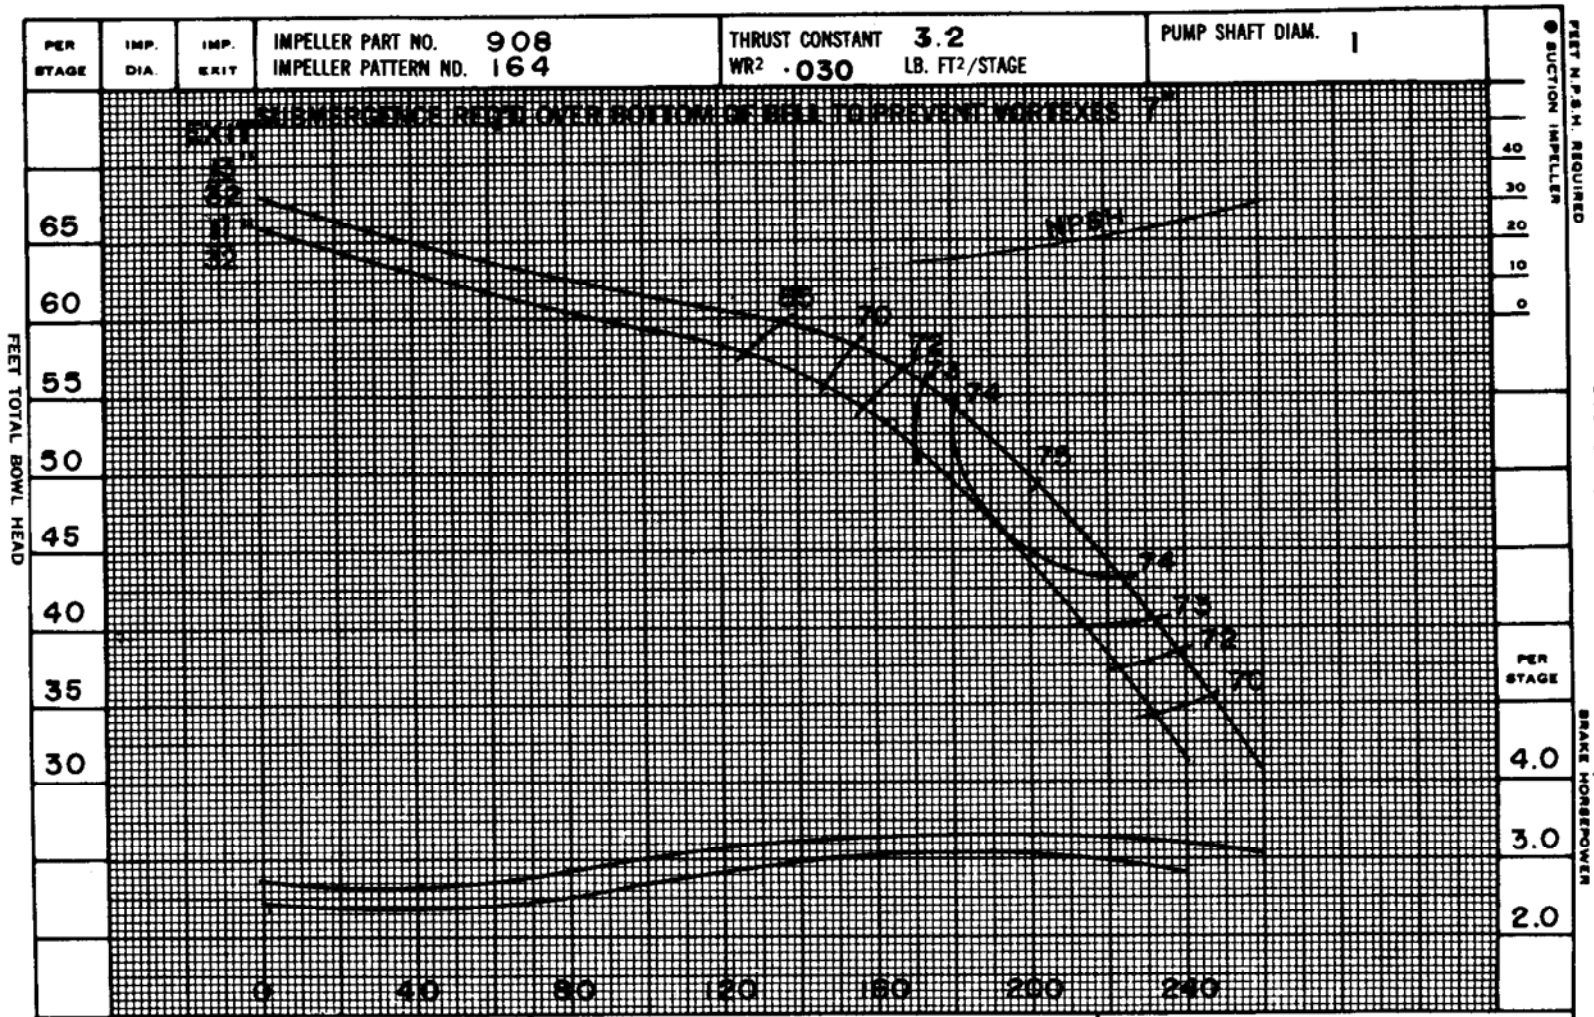

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 5 STAGES MULTIPLY HD. & EFF. BY .99

DATE 3-16-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6 CS TURBINE PUMP — 3500 R.P.M.

IMPELLER — BRONZE

BOWL — CAST IRON
VIT. EN.

CURVE SHEET NO. EC-0683

JP-341

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 908 IMPELLER PATTERN NO. 164	THRUST CONSTANT 3.2 WR² .030 LB. FT²/STAGE	PUMP SHAFT DIAM. 1" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 7"

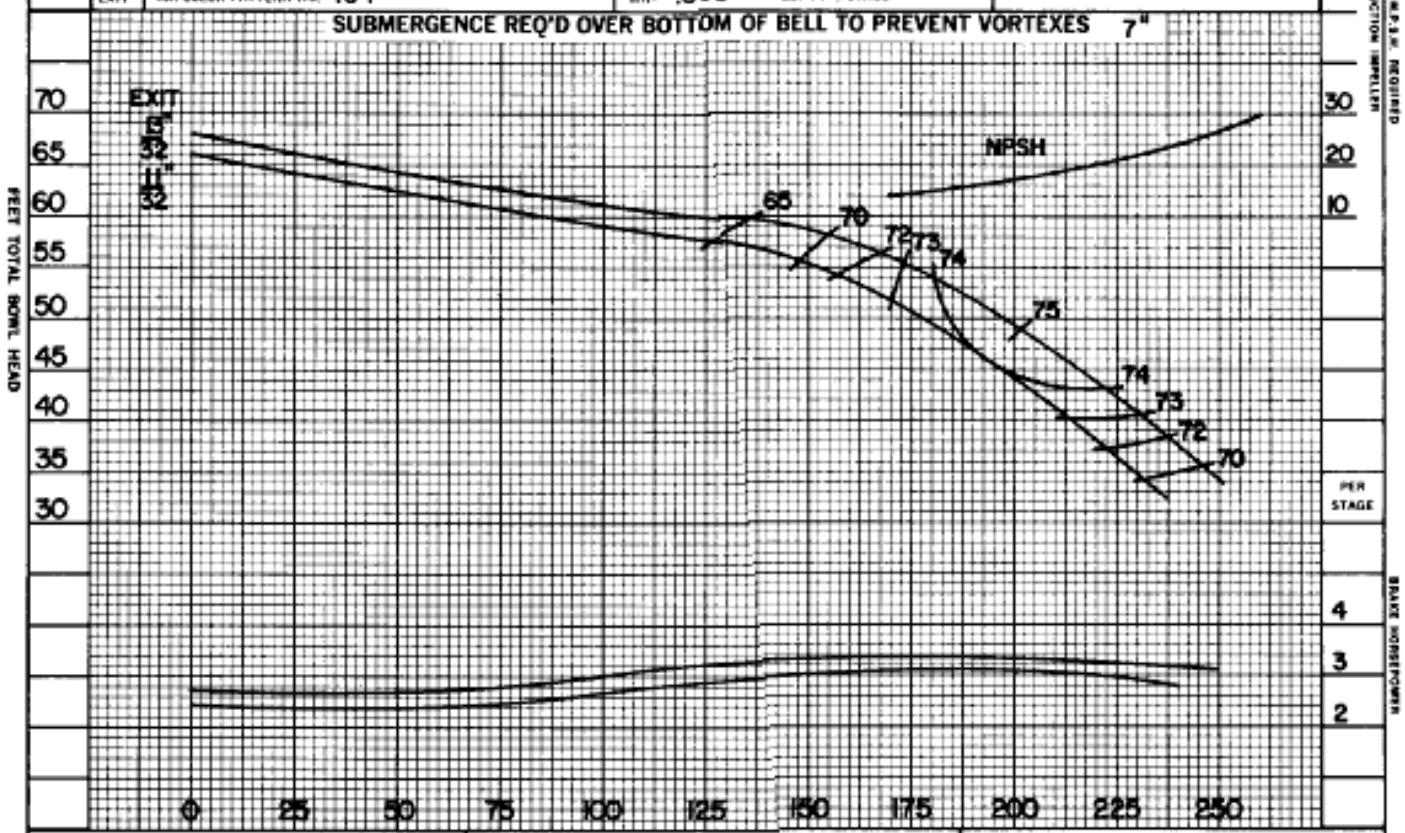

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 5 STAGES MULTIPLY HD. & EFF. BY .99
DATE 1-30-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

6 CS TURBINE PUMP 3500 R.P.M.
IMPELLER — BRONZE
BOWL — CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2496

JP 1124