PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 44276-A IMPELLER PATTERN NO. 43468-D	THRUST CONSTANT 3.1 WR² .31 LB. FT²/STAGE	PUMP SHAFT DIAM. 1 1/2" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 15"

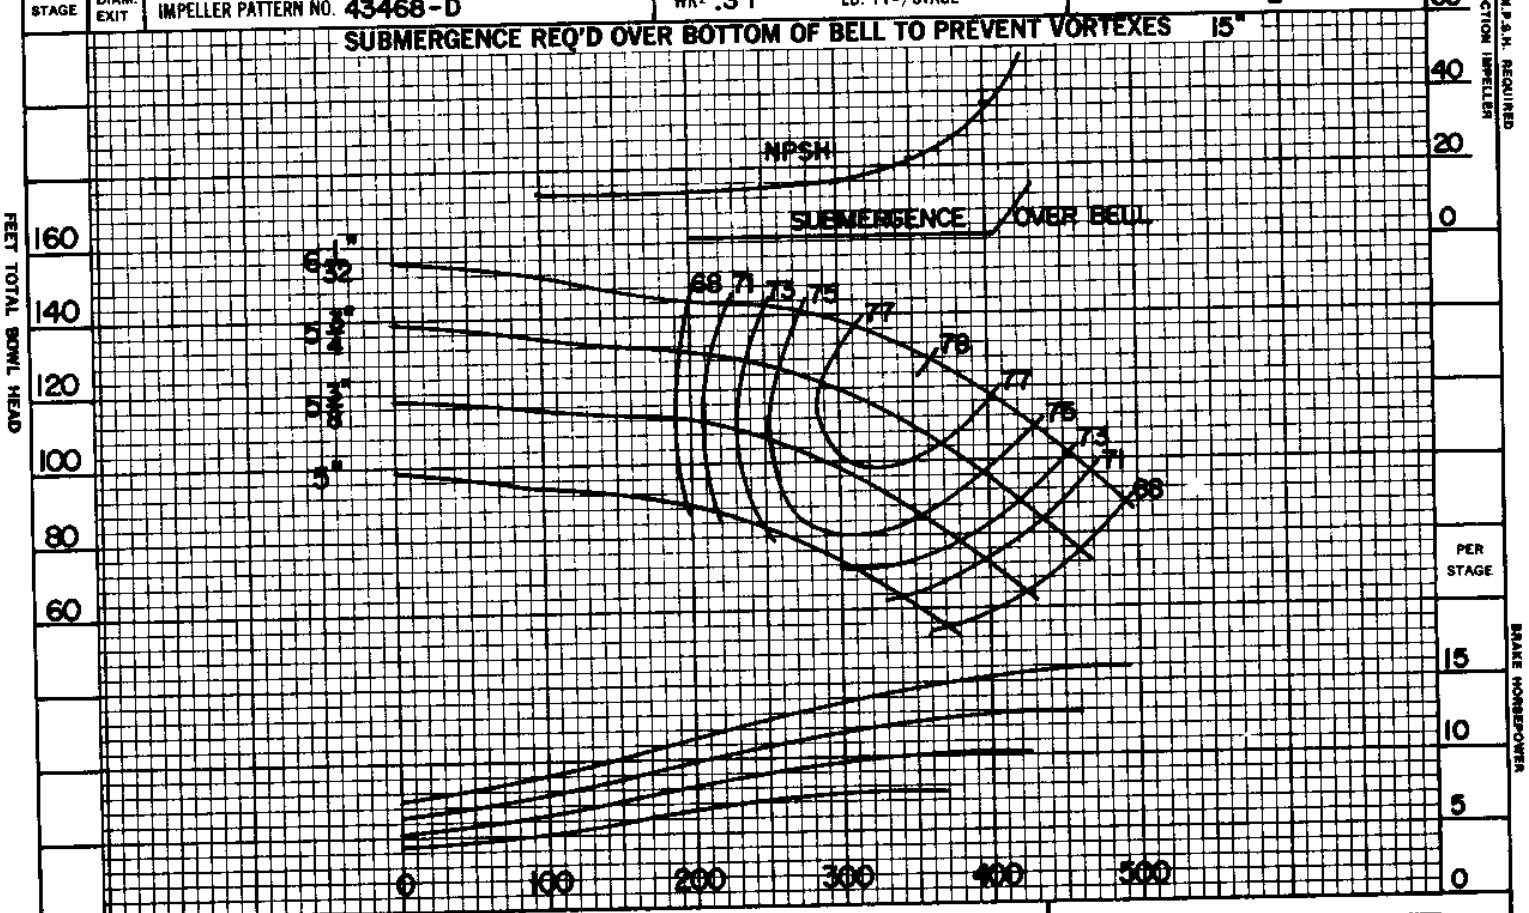

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 5 STAGES MULTIPLY HD. & EFF. BY .99
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

8 DHC
IMPELLER — BRONZE

3550 RPM
BOWL — CAST IRON VIT. ENAMELED

CURVE SHEET NO.
EC-2655

JP-341A