PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 478 / WR² 1170 LB. FT²/STAGE	PUMP SHAFT DIAM. 5" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 107"

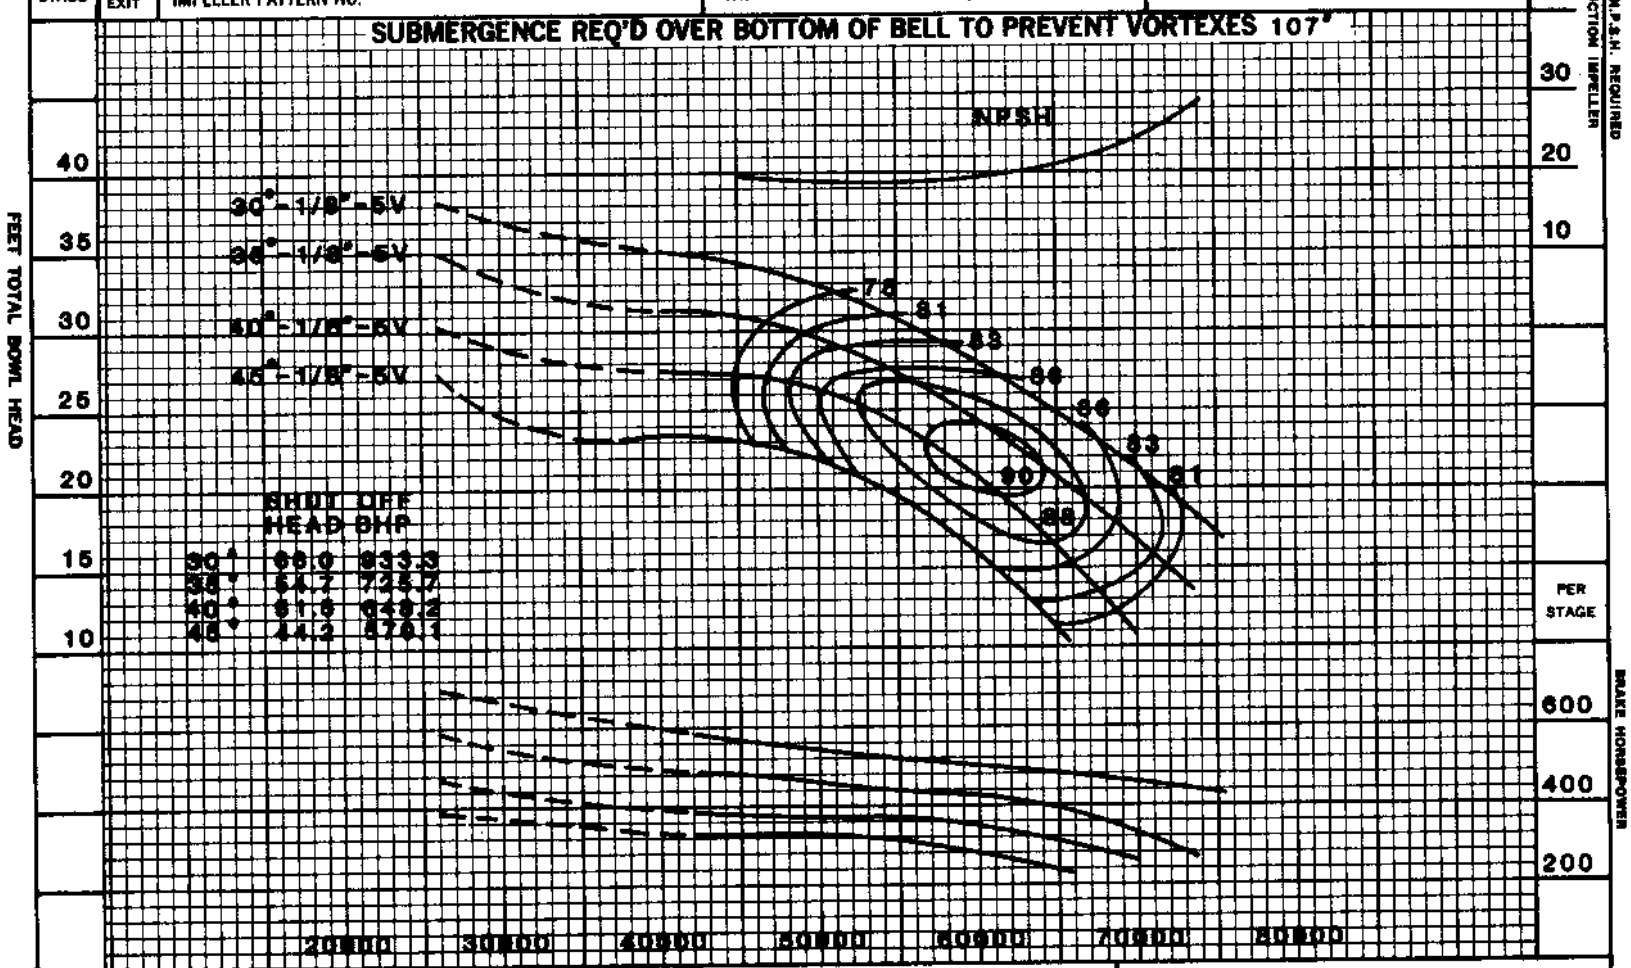

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

42 YMS
IMPELLER — BRONZE
MIXED-FLOW PUMP
CLASS 'C' FINISH

395 RPM
BOWL — CAST IRON

CURVE SHEET NO.
EC-2817

JP-341A