PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 500 / WR² 7600 LB. FT²/STAGE	PUMP SHAFT DIAM. 6 1/2" INCHES

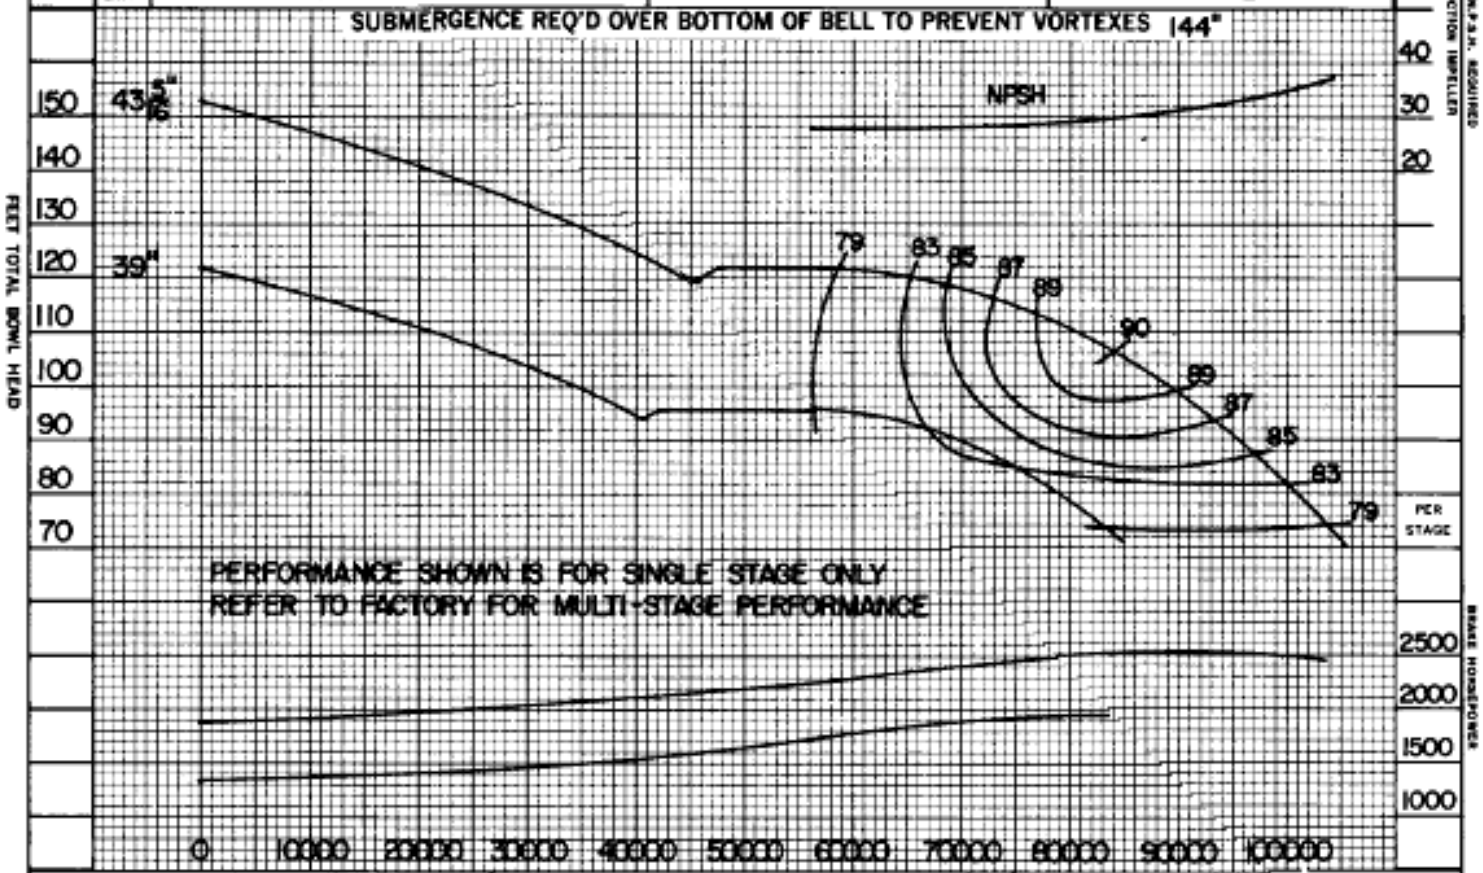

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY

DATE 8-31-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

72 THS TURBINE PUMP — 445 RPM
IMPELLER – BRONZE
BOWL – CAST IRON COATED
CURVE SHEET NO. EC-2364

JP 1124

PER STAGE	IMP. DIAM EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 500 / WR² 7600 LB. FT²/STAGE	PUMP SHAFT DIAM. 6 1/2" INCHES

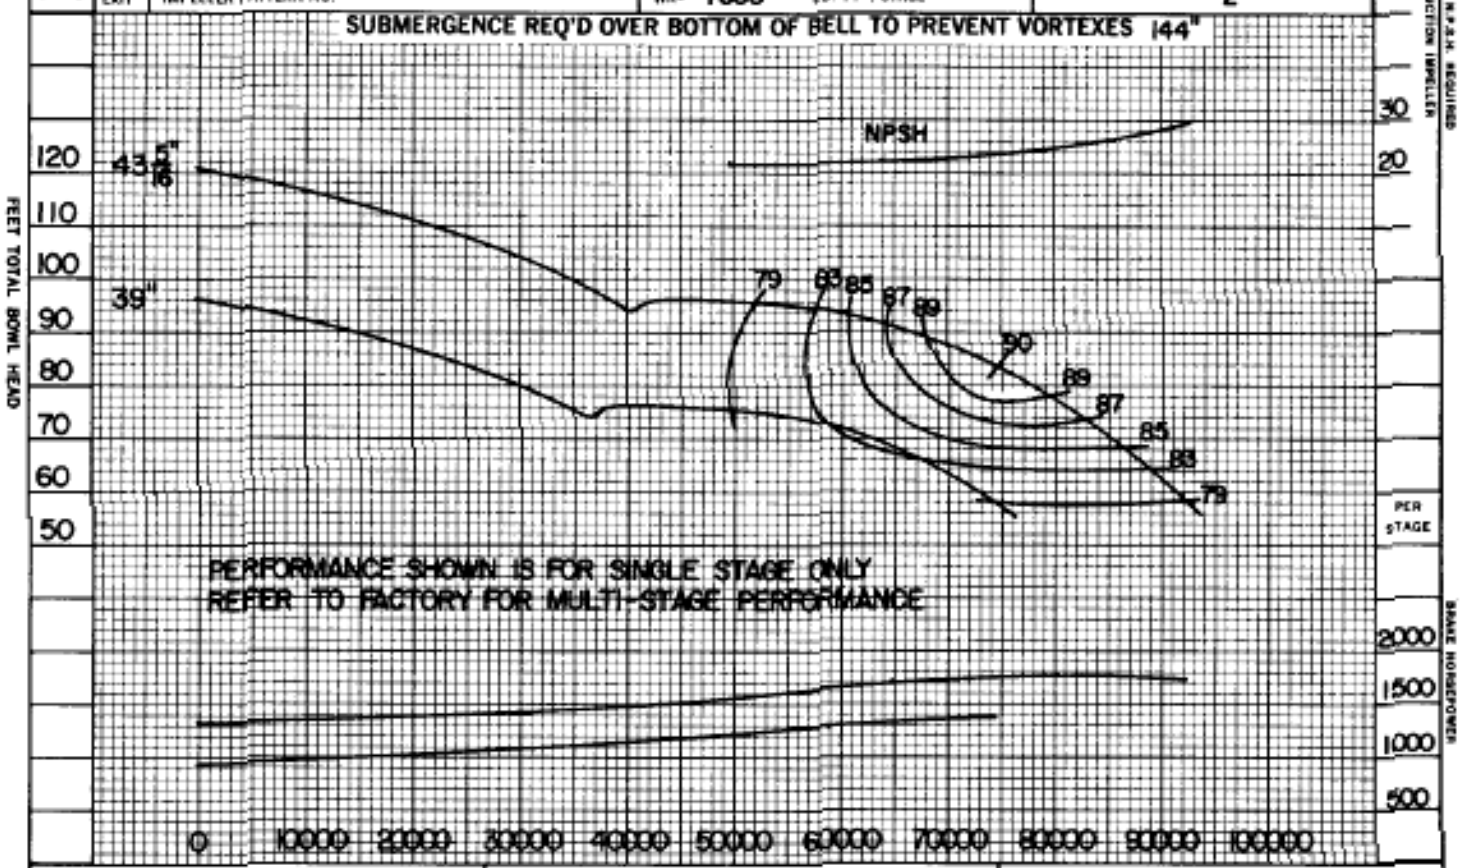

PERFORMANCE BASED ON MULTI-STAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY

DATE 8-31-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

72 THS TURBINE PUMP
IMPELLER – BRONZE

395 RPM
BOWL – CAST IRON
COATED

CURVE SHEET NO.
EC-2367

JP 1124