PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 385 / WR² 7400 LB. FT²/STAGE	PUMP SHAFT DIAM. 5½"

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 129"

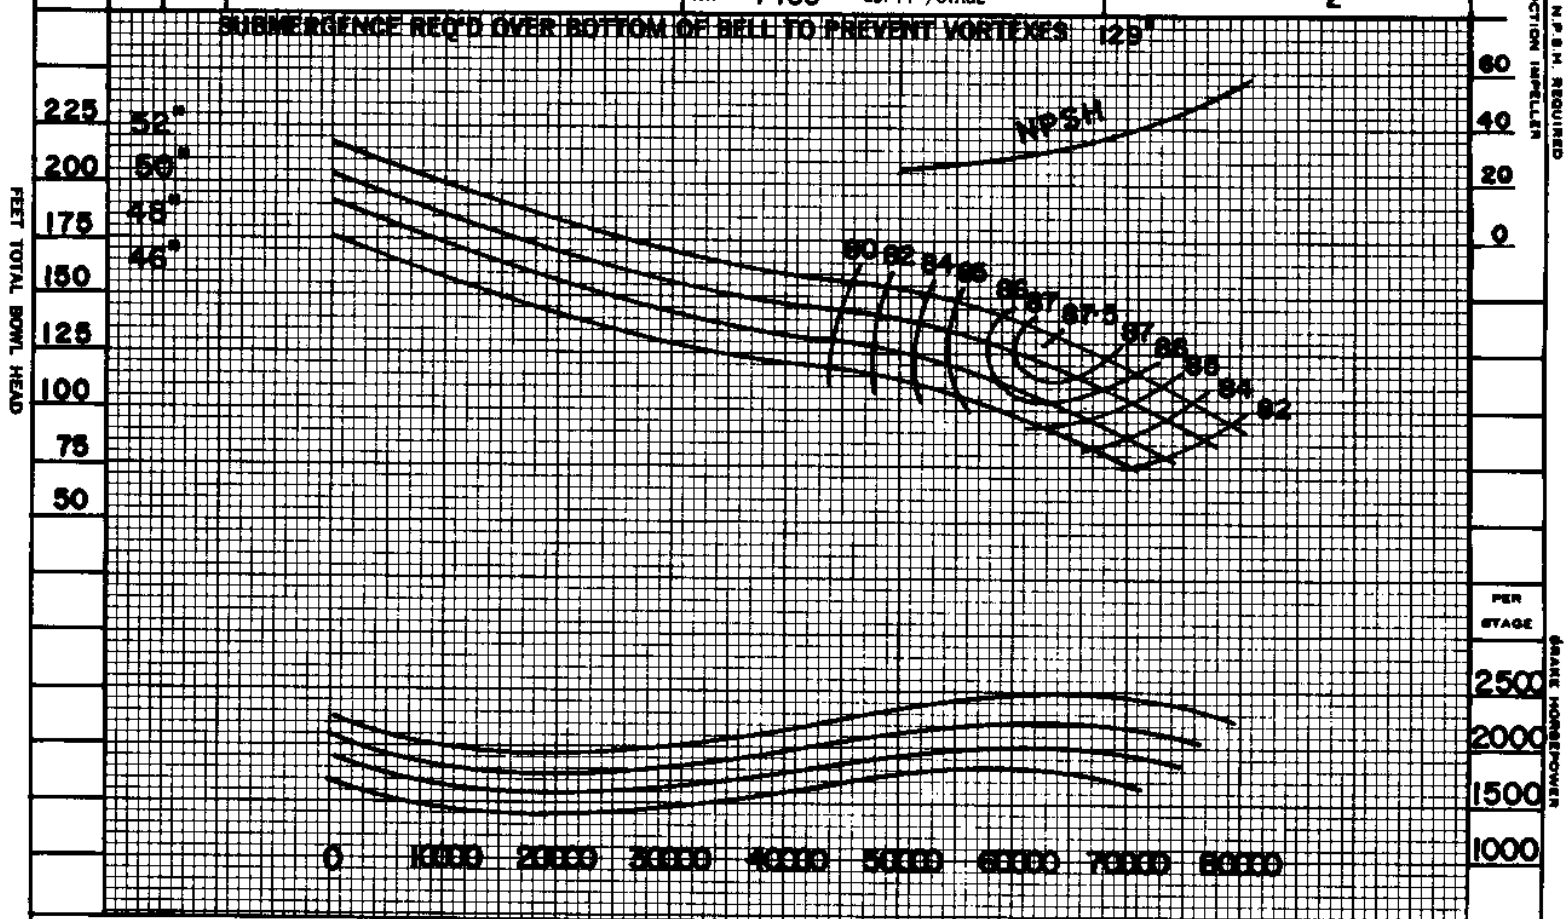

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·00

DATE 3-9-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

64CLC TURBINE PUMP
IMPELLER — BRONZE

505 RPM
BOWL — CAST IRON
COATED

CURVE SHEET NO.
EC-2573

JP-1017