PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 23447	THRUST CONSTANT 111	PUMP SHAFT DIAM. $3\frac{7}{16}$
			IMPELLER PATTERN NO. 22424	WR² 228 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 50"

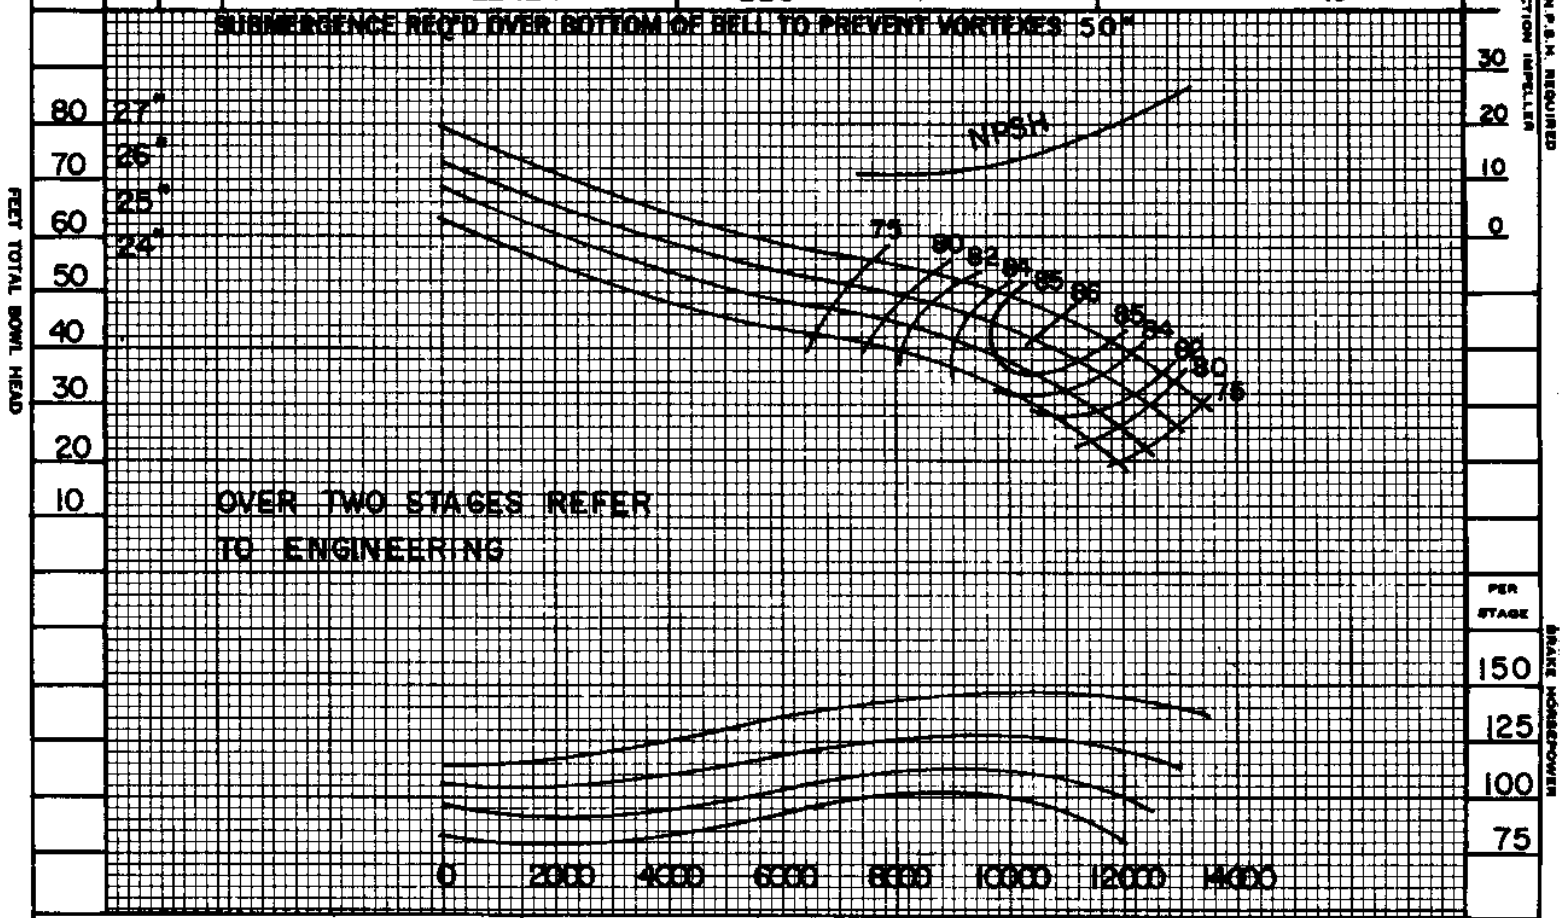

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·00
DATE 6-12-74

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

33 CLC TURBINE PUMP
IMPELLER — BRONZE

585 RPM
BOWL — CAST IRON
COATED

CURVE SHEET NO.
EC-1118

JP-1017