PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 75 / WR² 390 LB. FT²/STAGE	PUMP SHAFT DIAM. 4" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 48"

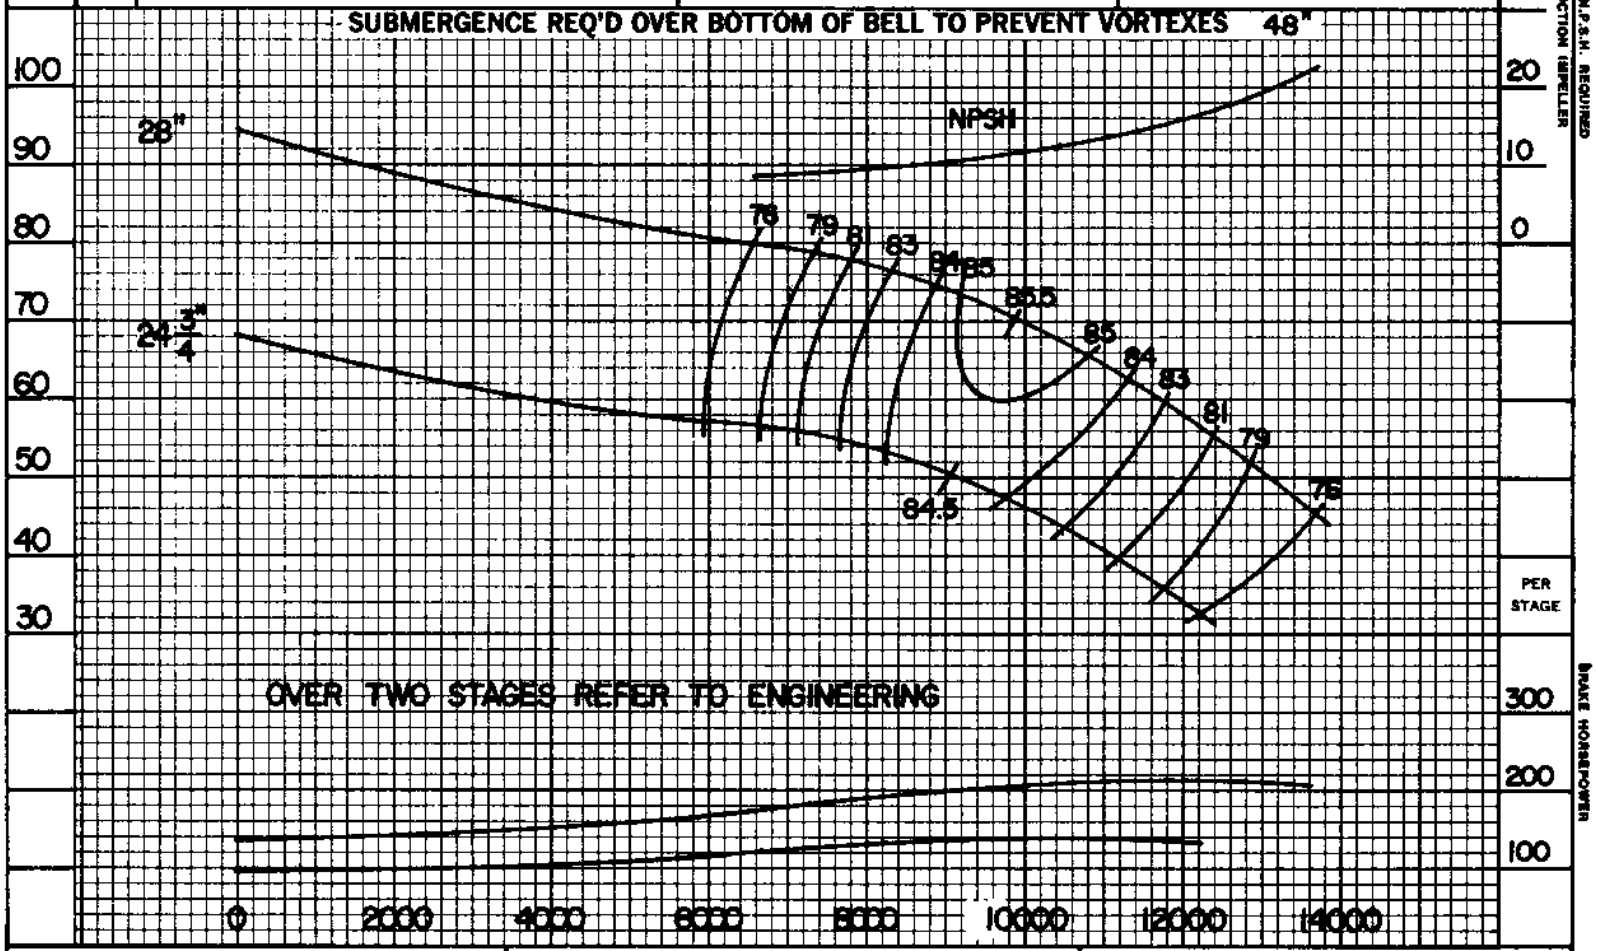

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY
DATE 10-19-77

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1906

36 GMC TURBINE PUMP 590 RPM
IMPELLER — BRONZE
BOWL — CAST IRON COATED
CURVE SHEET NO. EC-2424

JP-341A