PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 184 / WR² 3120 LB. FT²/STAGE	PUMP SHAFT DIAM. 5 1/2" INCHES

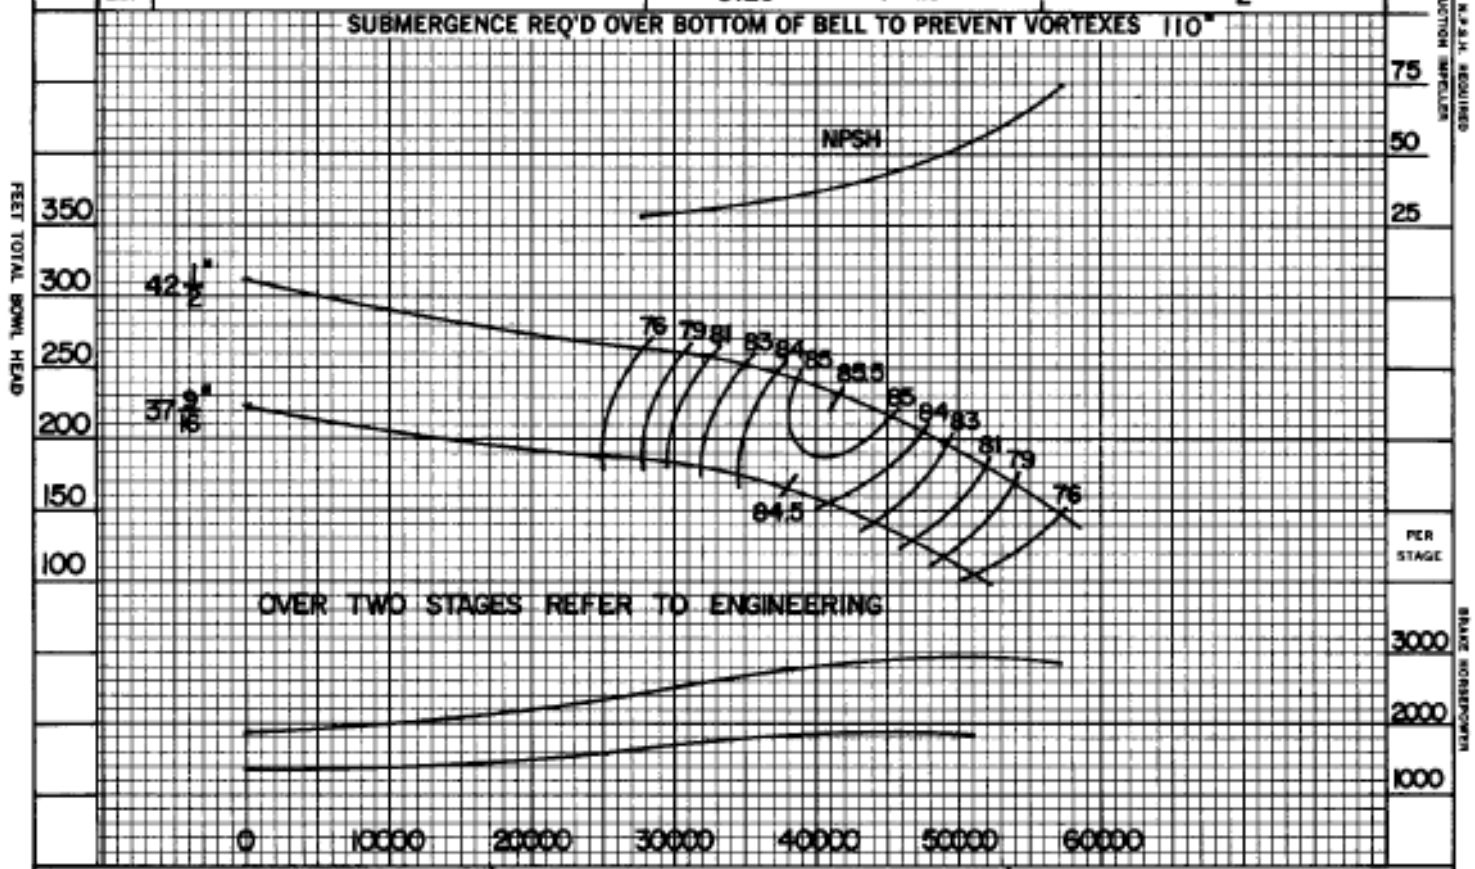

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY

DATE 10-25-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

54 GMC TURBINE PUMP 705 RPM
IMPELLER – BRONZE
BOWL – CAST IRON
COATED
CURVE SHEET NO. EC-2454

JP-341A

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 184 / WR² 3120 LB. FT²/STAGE	PUMP SHAFT DIAM. $5\frac{1}{2}$" INCHES

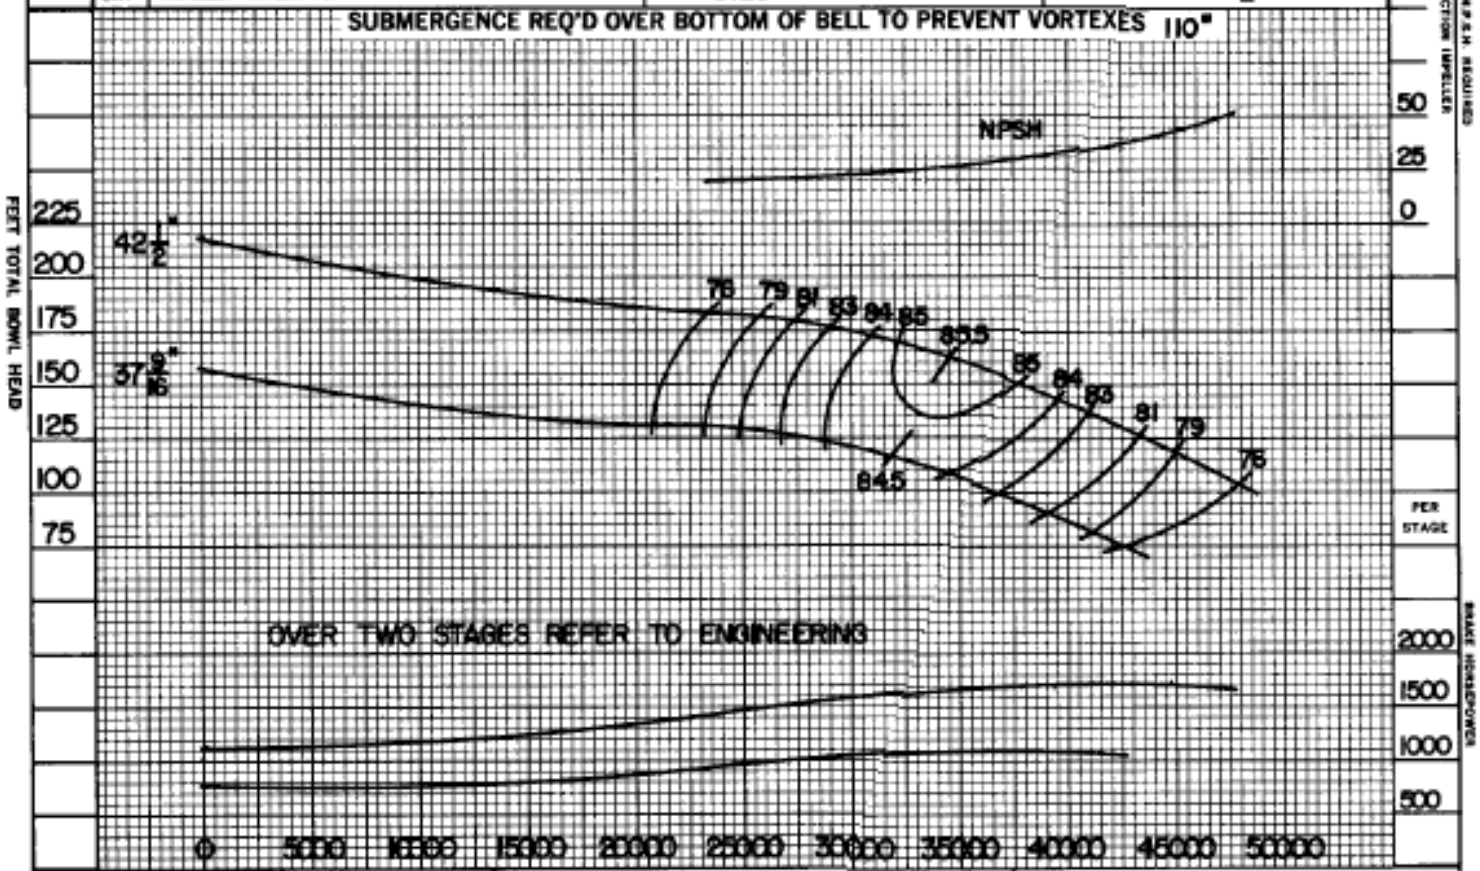

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY

DATE 10-25-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

54 GMC TURBINE PUMP — 590 RPM
IMPELLER — BRONZE
BOWL — CAST IRON COATED
CURVE SHEET NO. EC-2453

JP 1124