| PER STAGE | IMP. DIA. | IMP. EXIT | IMPELLER PART NO. 2855 / IMPELLER PATTERN NO. 2806 | THRUST CONSTANT 135 / WR² 18 LB. FT²/STAGE | PUMP SHAFT DIAM. 1 15/16 |
|---|---|---|---|---|---|

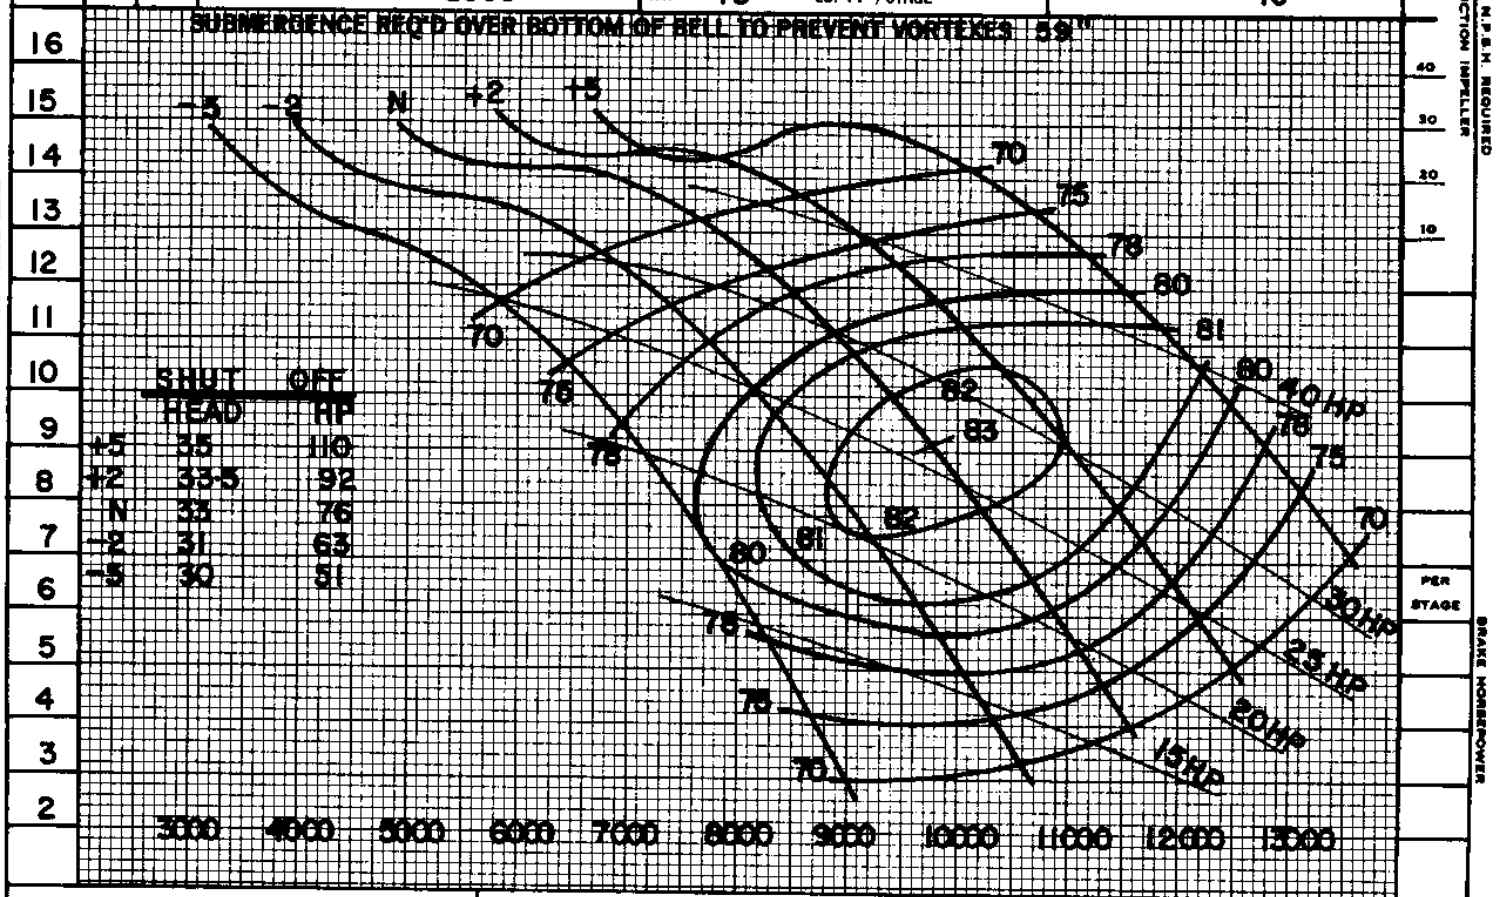


| | SHUT OFF HEAD | SHUT OFF HP |
|---|---|---|
| +5 | 35 | 110 |
| +2 | 33.5 | 92 |
| N | 33 | 76 |
| -2 | 31 | 63 |
| -5 | 30 | 51 |

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 9-25-73

**Johnston Pump Company**
Glendora, California 91740
ESTABLISHED 1909

20 PO PROPELLER PUMP — 700 RPM
IMPELLER — BRONZE
BOWL — CAST IRON

CURVE SHEET NO. EC-0860

JP-1017