PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 35059-A IMPELLER PATTERN NO. 33691-A	THRUST CONSTANT 200 WR² 625 LB. FT²/STAGE	PUMP SHAFT DIAM. 4" INCHES

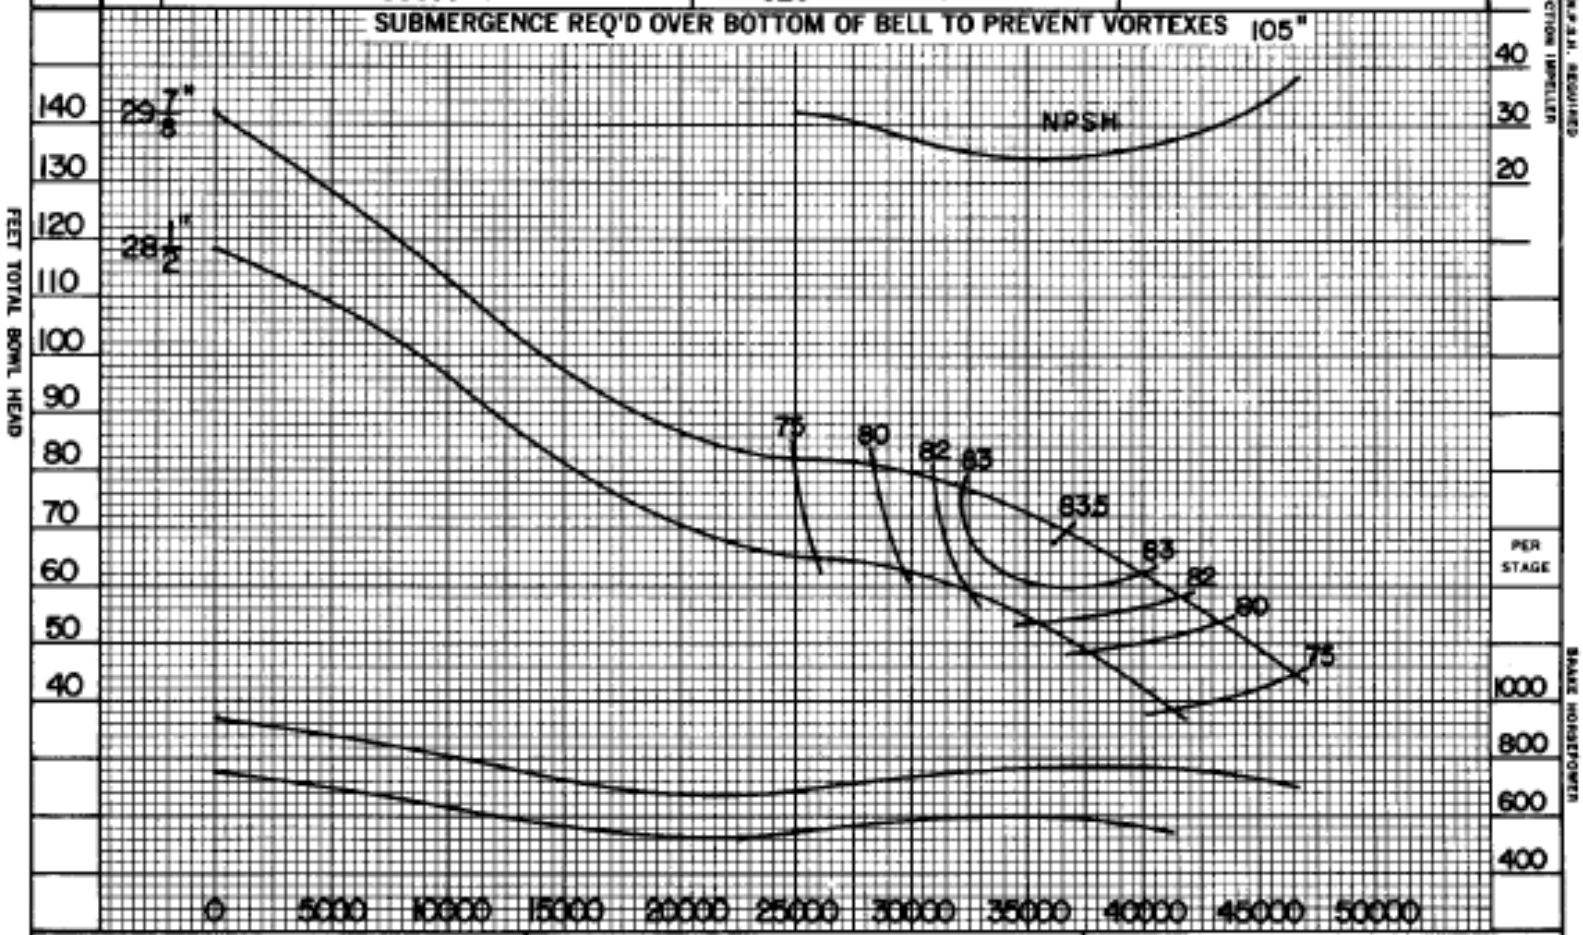

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR ___ STAGES MULTIPLY HD. & EFF. BY ___
DATE 4-3-78

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

40 QHC TURBINE PUMP 705 R.P.M.
IMPELLER — BRONZE
BOWL — CAST IRON COATED
CURVE SHEET NO. EC-2584

JP 1124

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 35059-A IMPELLER PATTERN NO. 33691-A	THRUST CONSTANT 200 WR² 625 LB. FT²/STAGE	PUMP SHAFT DIAM. 4" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 80"

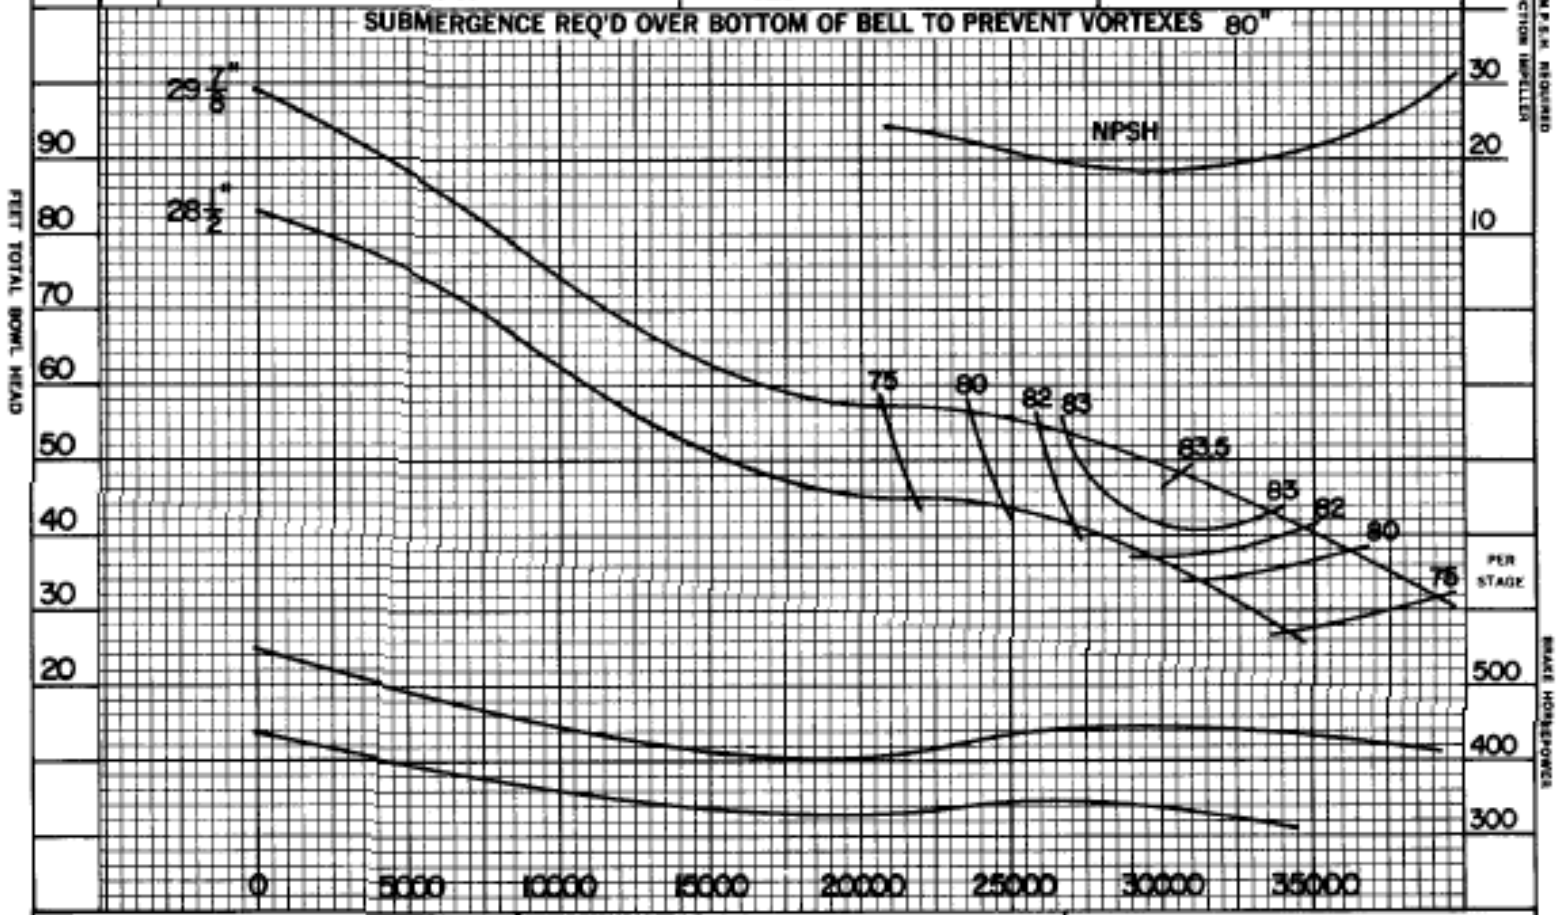

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR ___ STAGES MULTIPLY HD. & EFF. BY ___

DATE 4-5-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1900

40 QHC TURBINE PUMP 590 RPM

IMPELLER – BRONZE

BOWL – CAST IRON COATED

CURVE SHEET NO. EC-2585

JP-341A