PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 111 / WR² 1025 LB. FT²/STAGE	PUMP SHAFT DIAM. 4½" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 88"

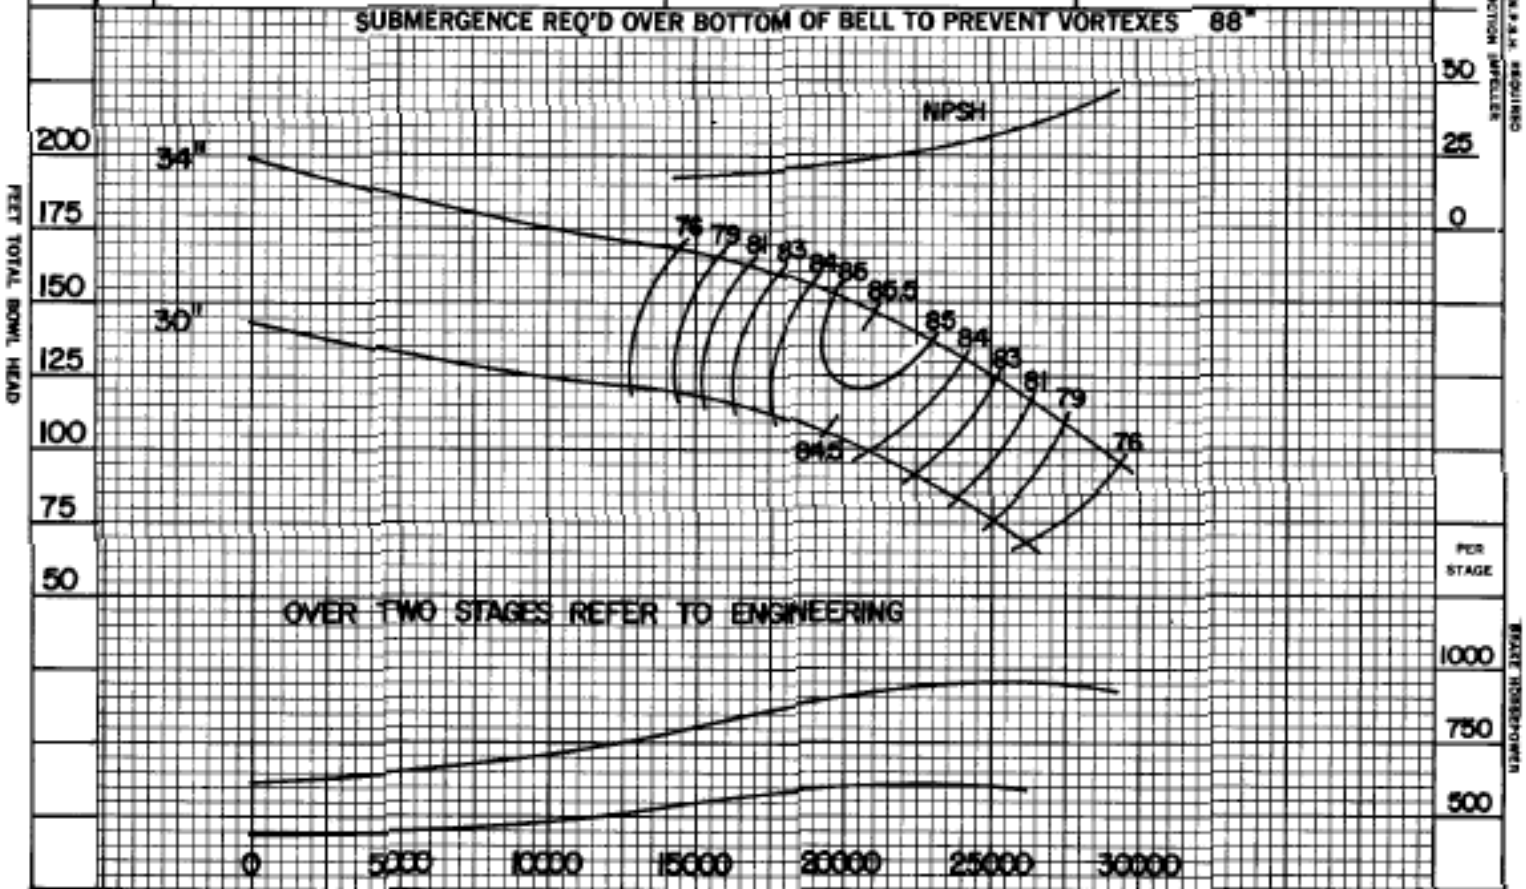

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY
FOR ☐ STAGES MULTIPLY HD. & EFF. BY

DATE 10-20-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

44 GMC TURBINE PUMP — 705 R.P.M.
IMPELLER – BRONZE
BOWL – CAST IRON COATED
CURVE SHEET NO. EC-2435

JP-341A