PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 225 / WR² 1040 LB. FT²/STAGE	PUMP SHAFT DIAM. 4-1/2 INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 112"

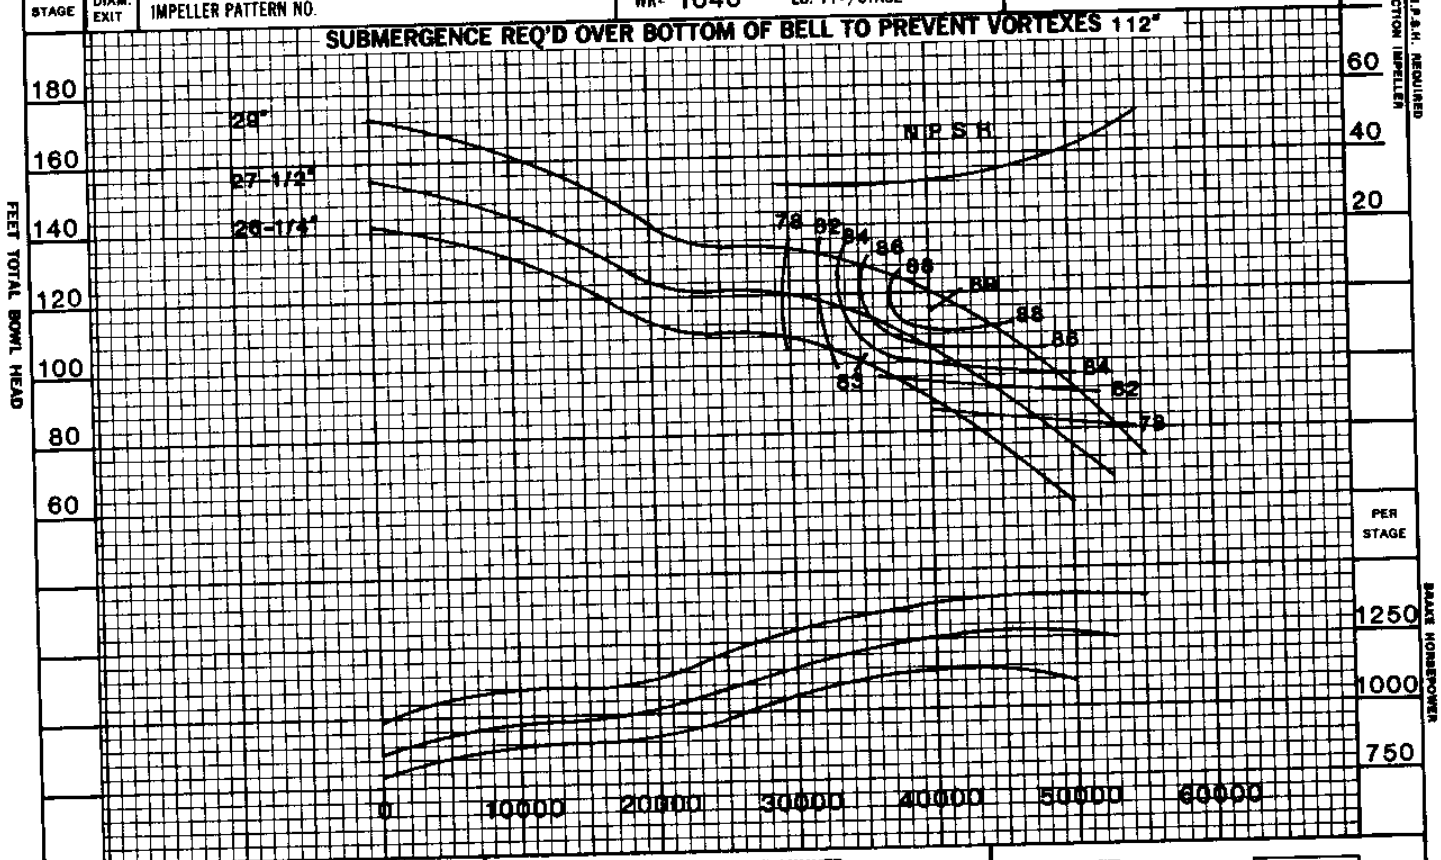

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR — STAGES MULTIPLY HD. & EFF. BY —
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

44THS TURBINE PUMP — 705 RPM
IMPELLER – BRONZE
BOWL – CAST IRON COATED
CURVE SHEET NO. EC-2762

JP-341A