PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 16521	THRUST CONSTANT 42	PUMP SHAFT DIAM. 1 15/16"
			IMPELLER PATTERN NO. 15773	WR² 4.8 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 36 INCHES

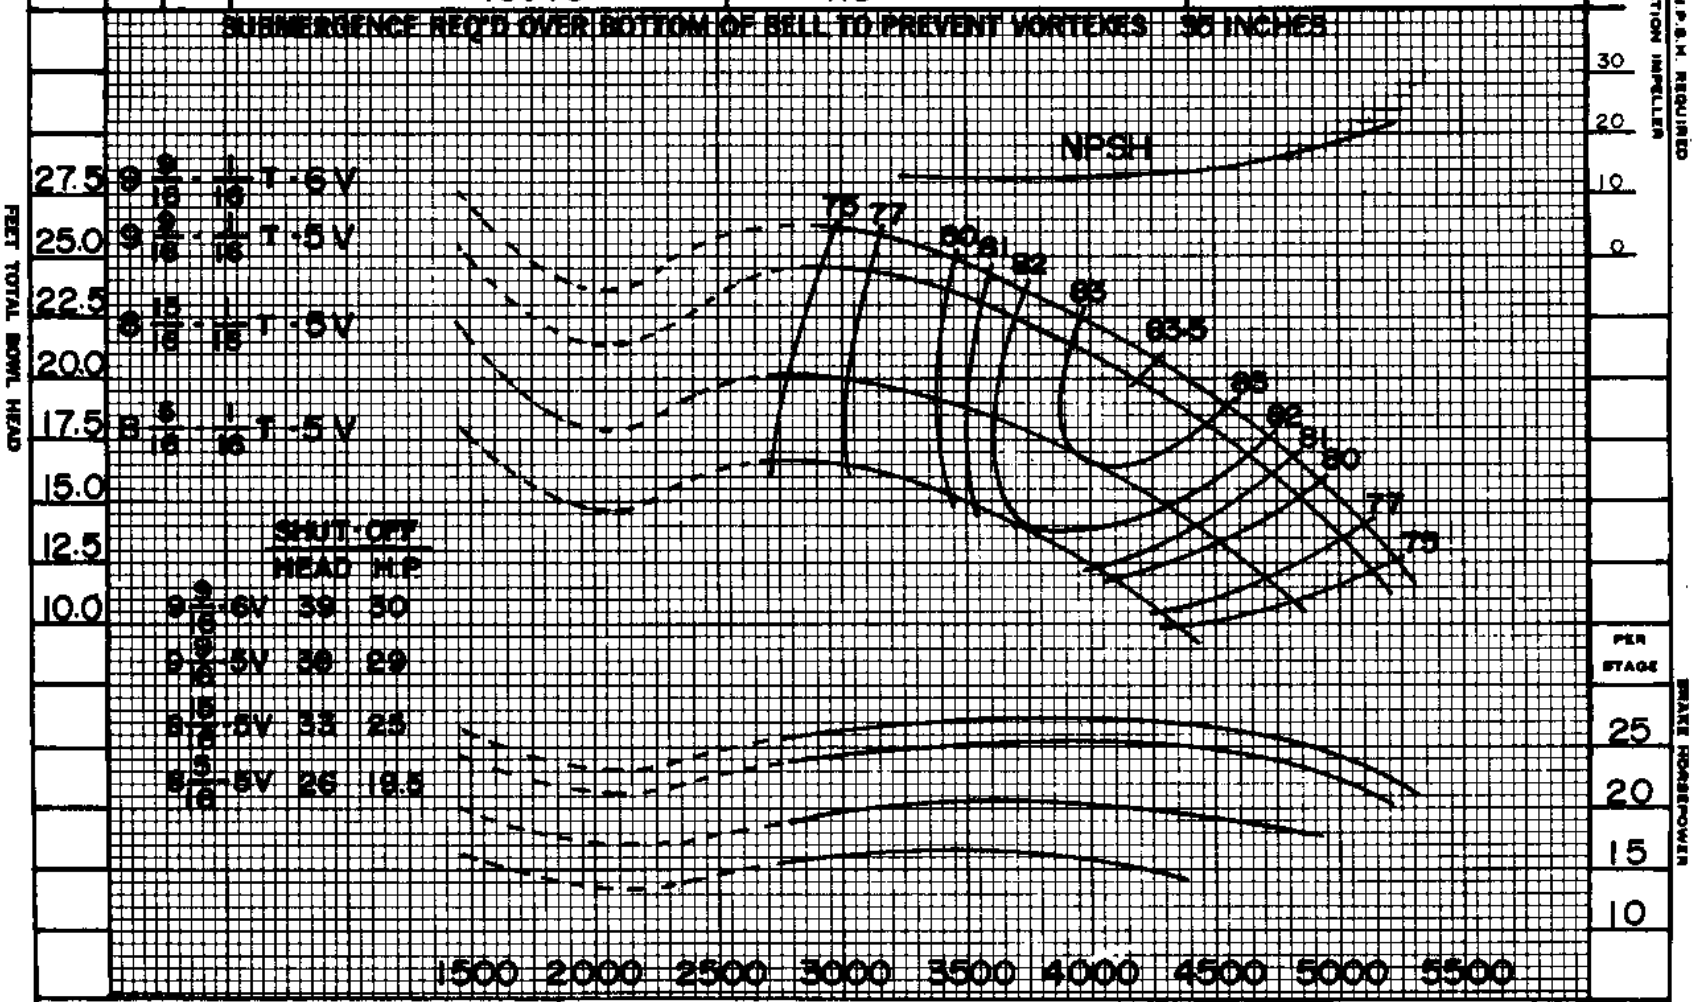

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 1-5-74

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

14PS MIXED-FLOW PUMP
IMPELLER — BRONZE
CLASS 'C' FIN.

880 R.P.M.
BOWL — CAST IRON

CURVE SHEET NO
EC-1006

JP-1017