PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 4580	THRUST CONSTANT 54.0	PUMP SHAFT DIAM. $2\frac{7}{16}$
			IMPELLER PATTERN NO. 3382	WR² 39 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 40"

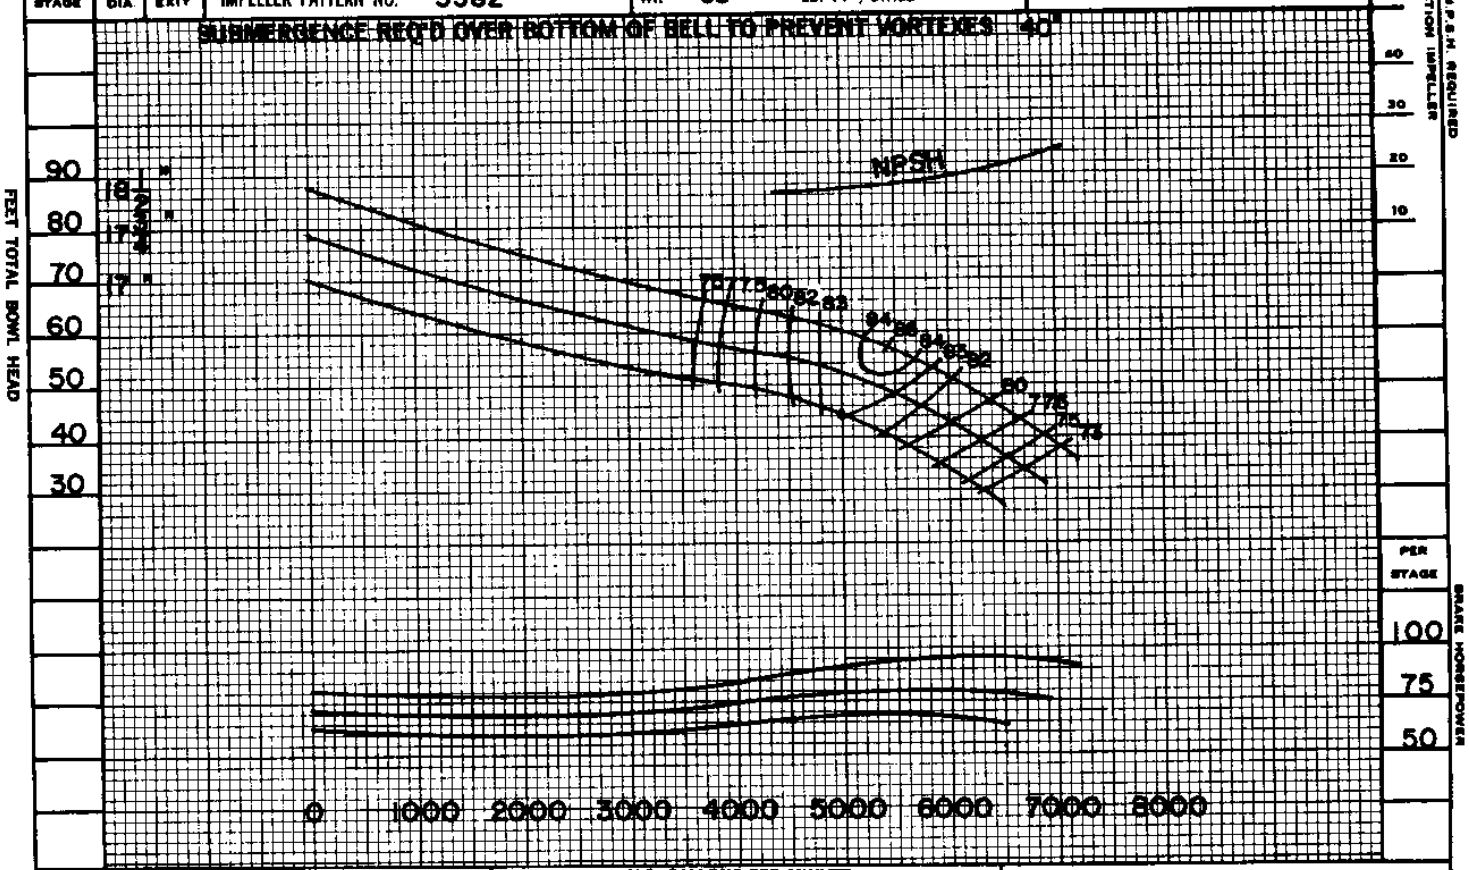

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .99

FOR 2 STAGES MULTIPLY HD & EFF BY 1.00

DATE 10-24-72

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

24DC TURBINE PUMP

IMPELLER — BRONZE

880 RPM

BOWL — CAST IRON COATED

CURVE SHEET NO. EC-0539

JP-1017