PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 105 / WR² 140 LB. FT²/STAGE	PUMP SHAFT DIAM. 3 3/16" INCHES

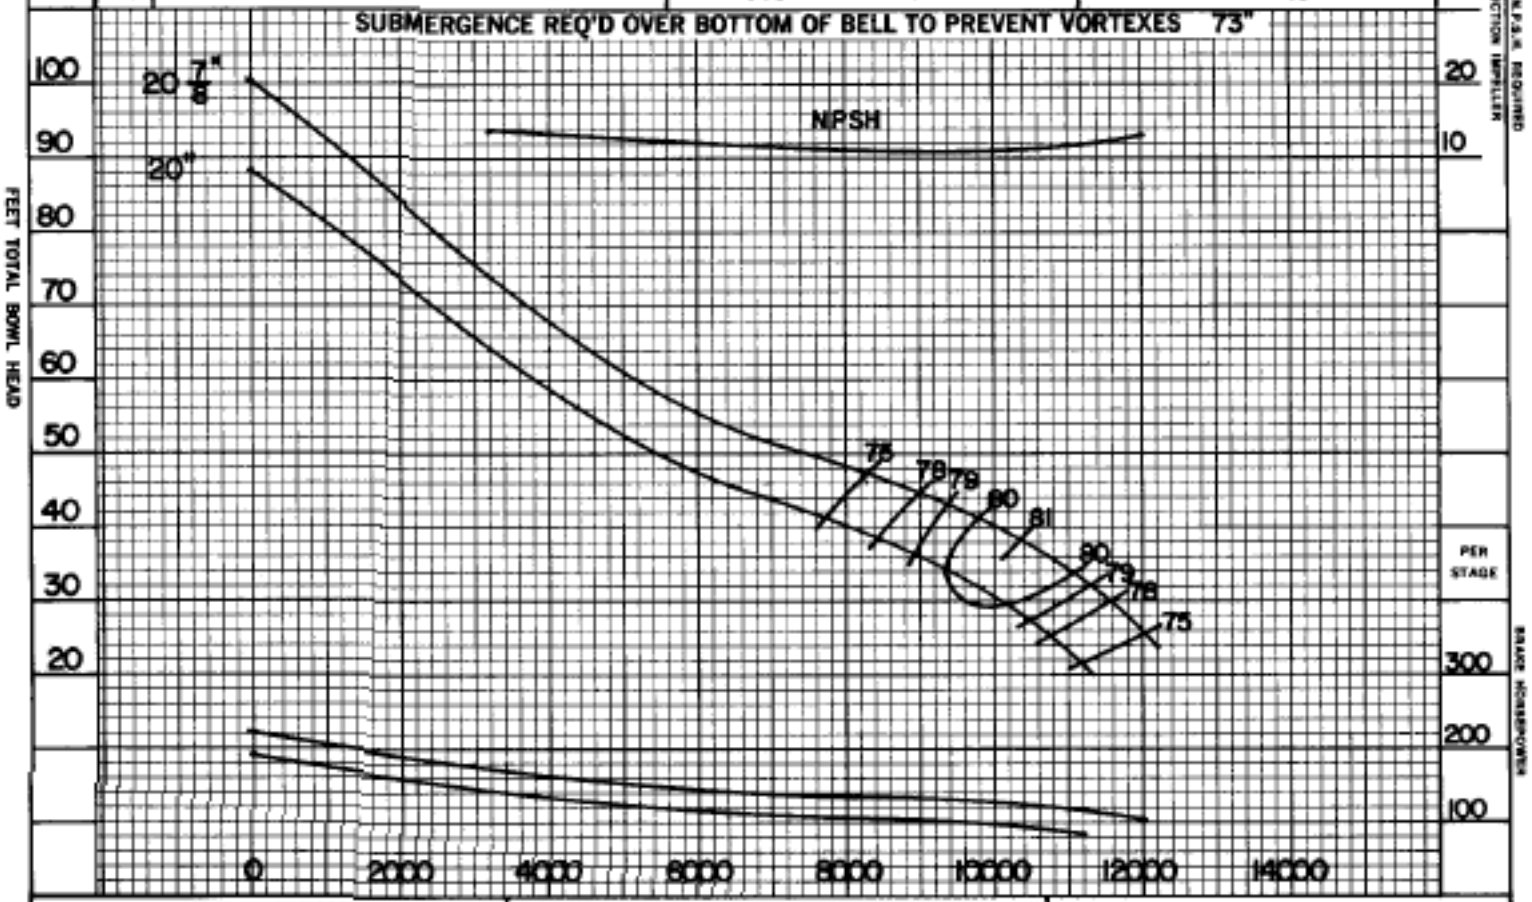

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 6-5-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

28 QLC TURBINE PUMP — 880 RPM

IMPELLER — BRONZE

BOWL — CAST IRON COATED

CURVE SHEET NO. EC-2283

JP-341A

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. / IMPELLER PATTERN NO.	THRUST CONSTANT 105 / WR² 140 LB. FT²/STAGE	PUMP SHAFT DIAM. 3 3/16" INCHES

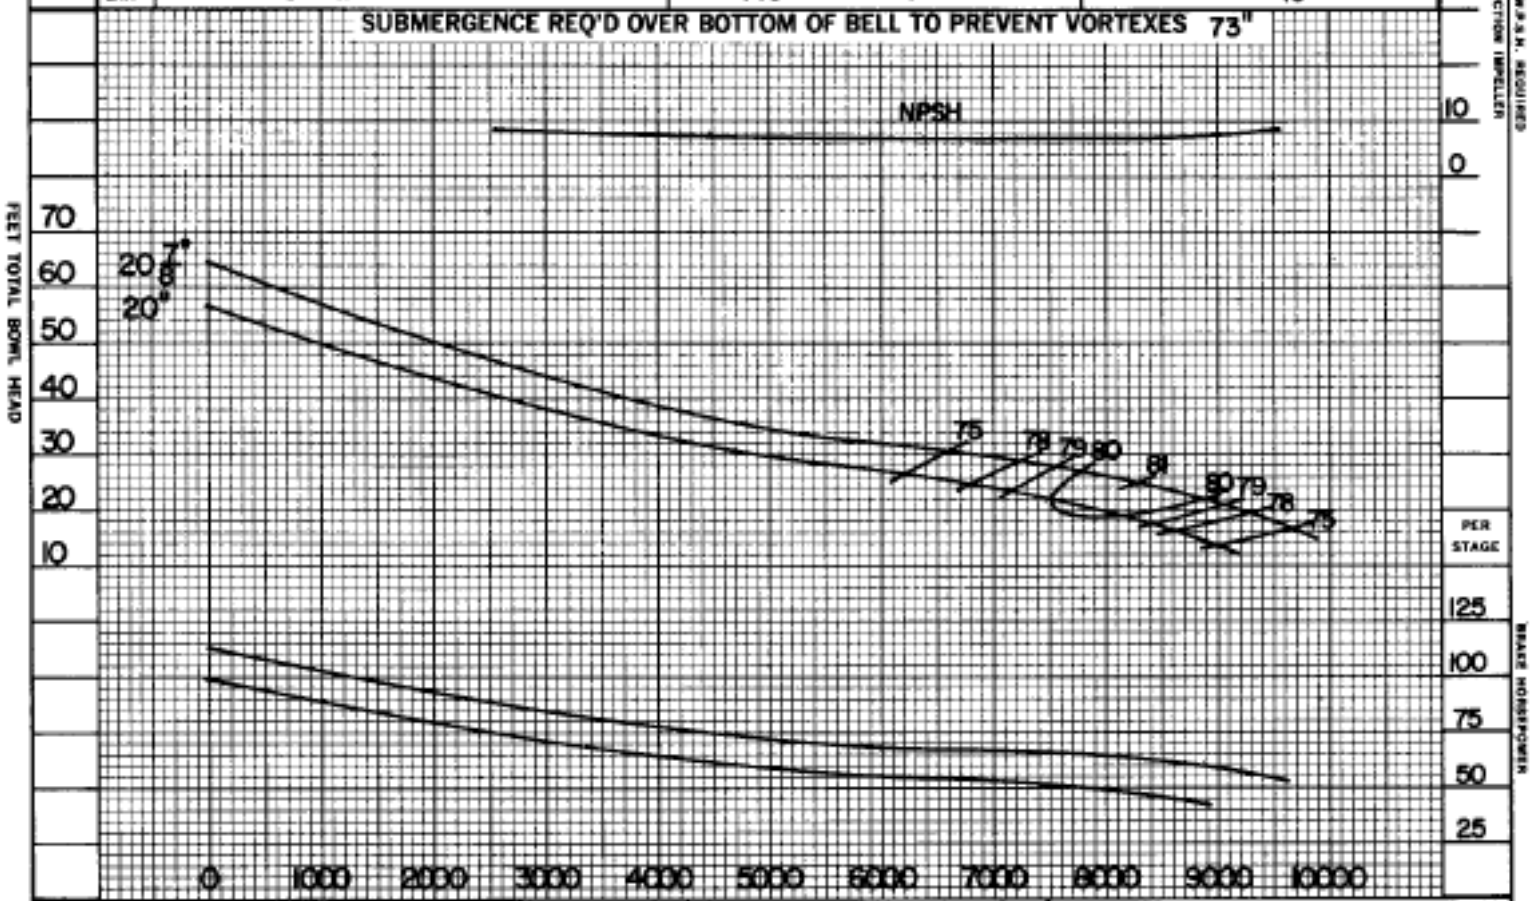

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 8-11-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1906

28 QLC TURBINE PUMP
IMPELLER – BRONZE
705 RPM
BOWL – CAST IRON COATED
CURVE SHEET NO. EC-2354

JP 1124