| PER STAGE | IMP. DIAM. EXIT | IMPELLER PART NO. / IMPELLER PATTERN NO. | THRUST CONSTANT 160 / WR² 580 LB. FT²/STAGE | PUMP SHAFT DIAM. 4" INCHES |
|---|---|---|---|---|

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 105"

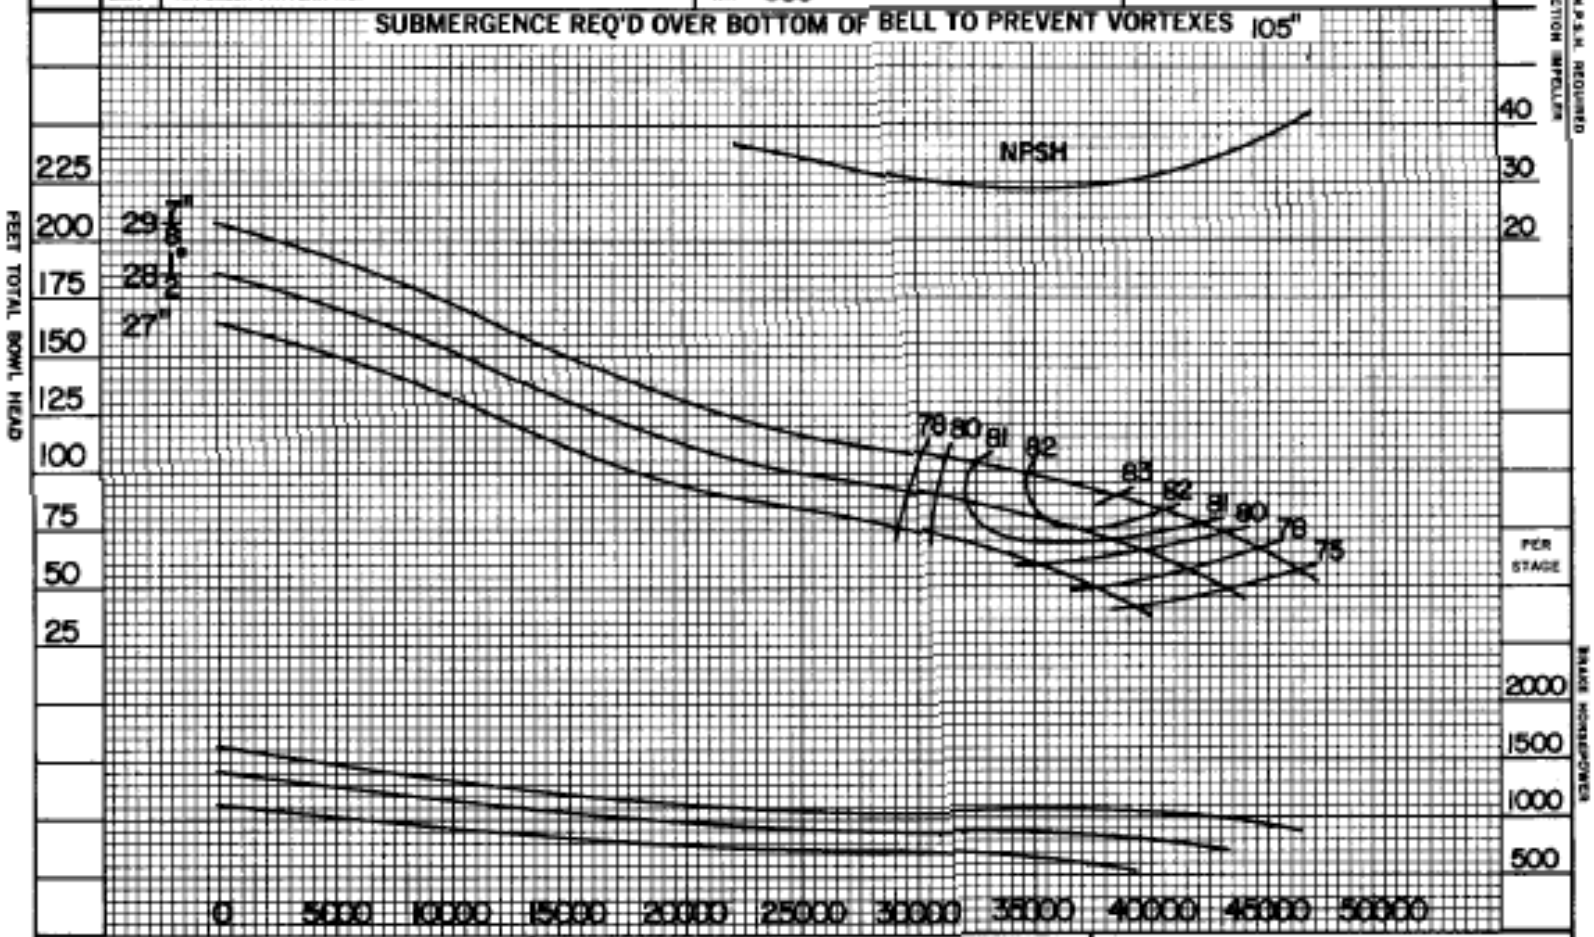


PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 4-6-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

40 QMC TURBINE PUMP 880 RPM
IMPELLER – BRONZE
BOWL – CAST IRON COATED
CURVE SHEET NO. EC-2592

JP 1124