FORM H 264 B 4-45

CURVE NO. 8 M 6AF - 1

DEVELOPMENT PROJECT MF6

SUPERSEDES 8M6AF-1

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	5	1
LOWER	2	2
LOWER	1	3

NOTE: ANY CHANGE IN EFFICIENCY CHANGES EITHER THE HEAD OR HORSE POWER IN PROPORTION.

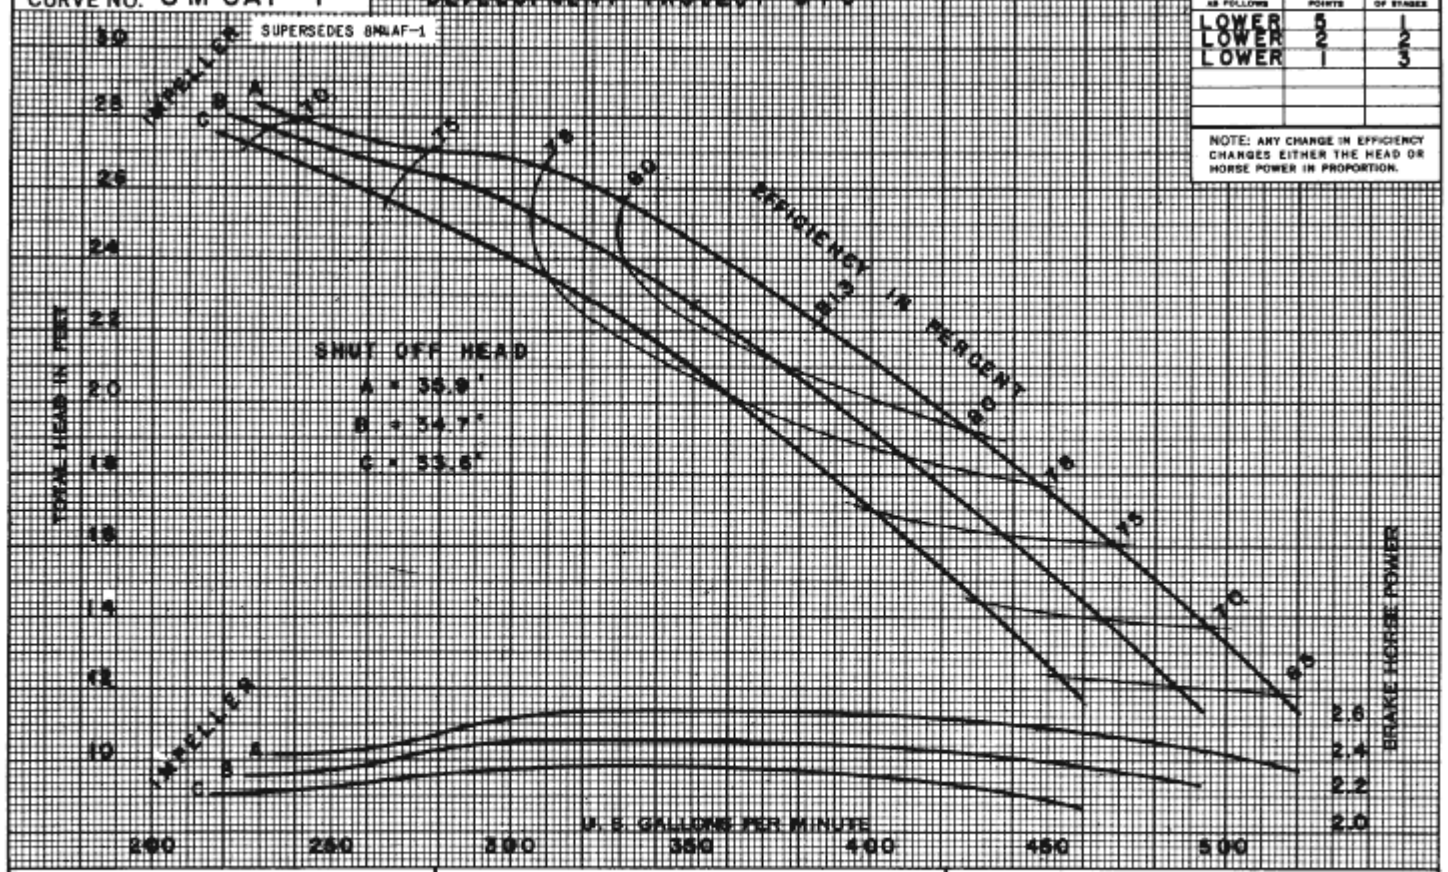

HYDRAULIC PERFORMANCE is contingent on the well furnishing the pump with the specified amount of clear, fresh, non-aerated water at a temperature of not to exceed 85 degrees Fahrenheit.

FAIRBANKS, MORSE & CO.

POMONA WORKS

POMONA • CALIFORNIA

4-1-51

LABORATORY PERFORMANCE PE

PER STAGE 8" M.C. DEEP WELL TURBINE

PUMP OPERATED AT 1760 R. P. M.

FIELD LOSS MUST BE DEDUCTED

PRINTED IN U. S. A.