BOWL T-82474

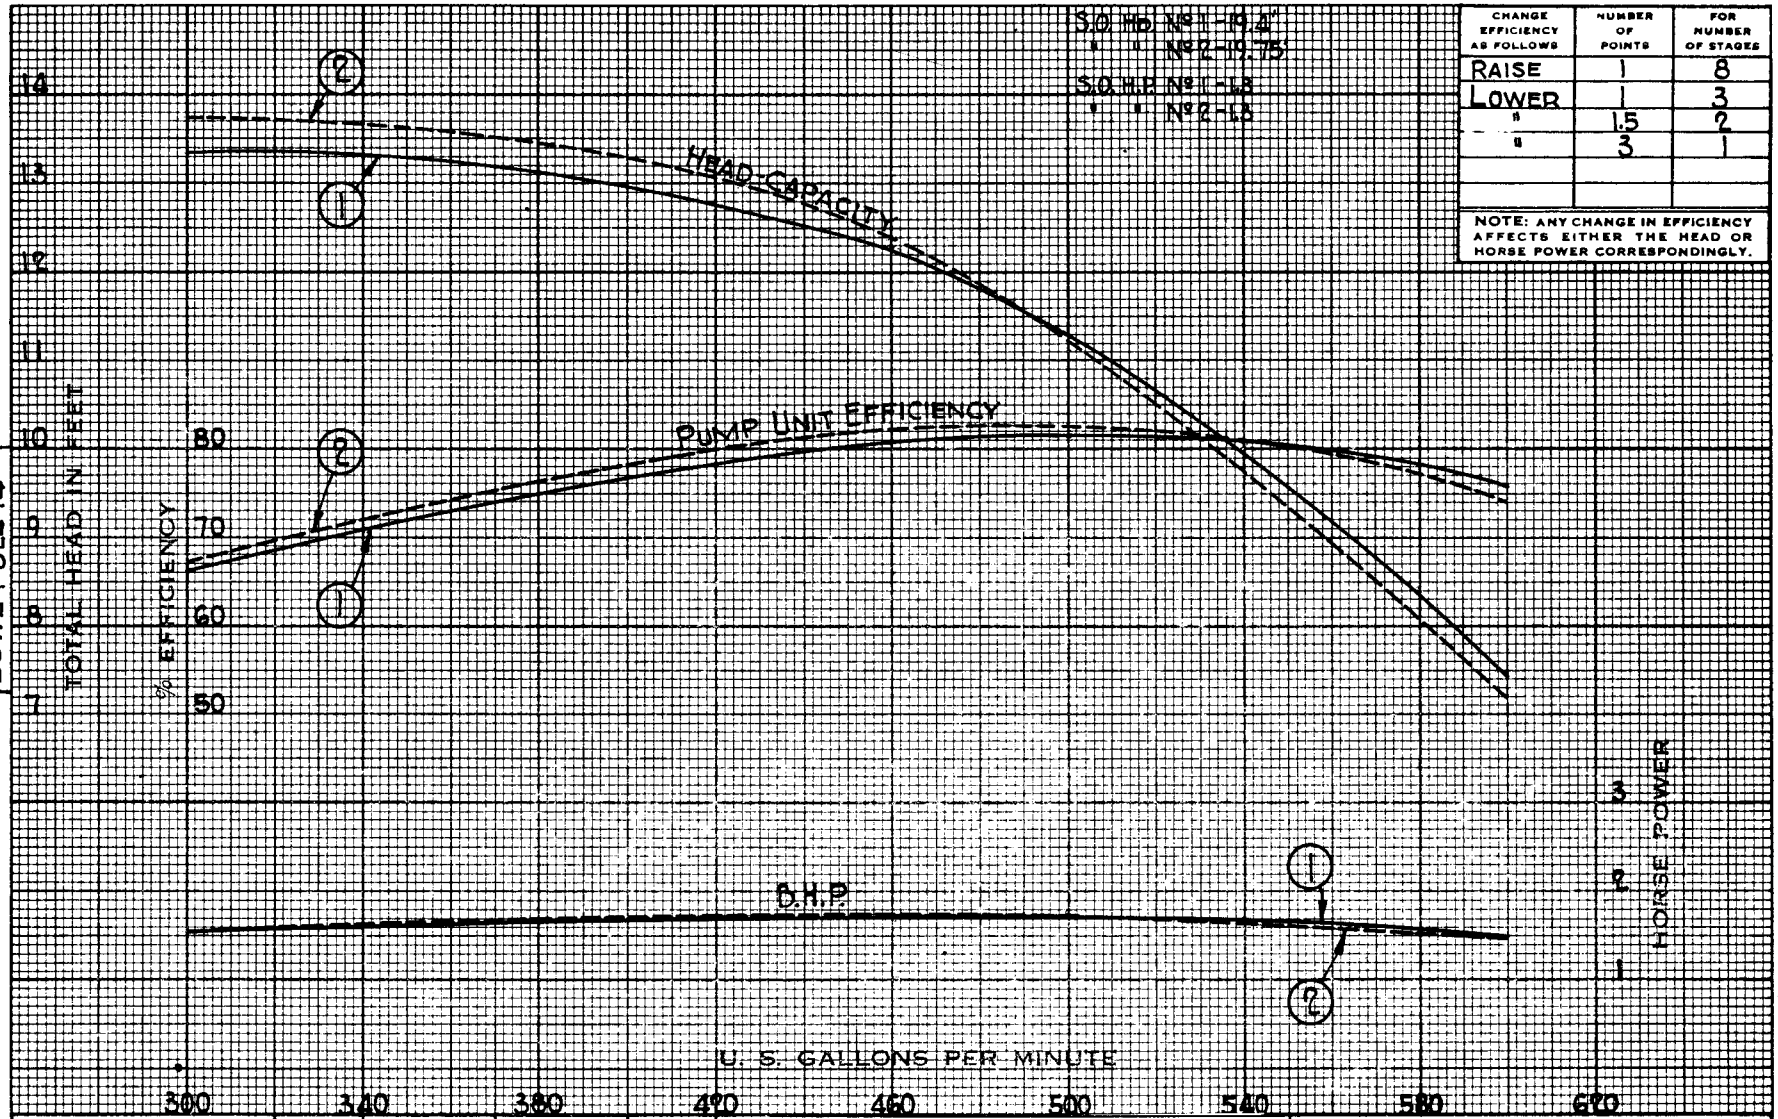

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	8
LOWER	1	3
"	1.5	2
"	3	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-82337	$6\frac{1}{4}$" x $7\frac{1}{8}$"	3920 2545
2	T-82337-E	$6\frac{1}{4}$" x $7\frac{1}{8}$"	3920
3			

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMP

PERFORMANCE PER STAGE
10"HXX DEEP WELL TURBINE PUMP
1160 R. P. M.
SHEET NO. R-1009

PRINTED IN U. S. A.

SUPERSEDES SHEET Nº R-478