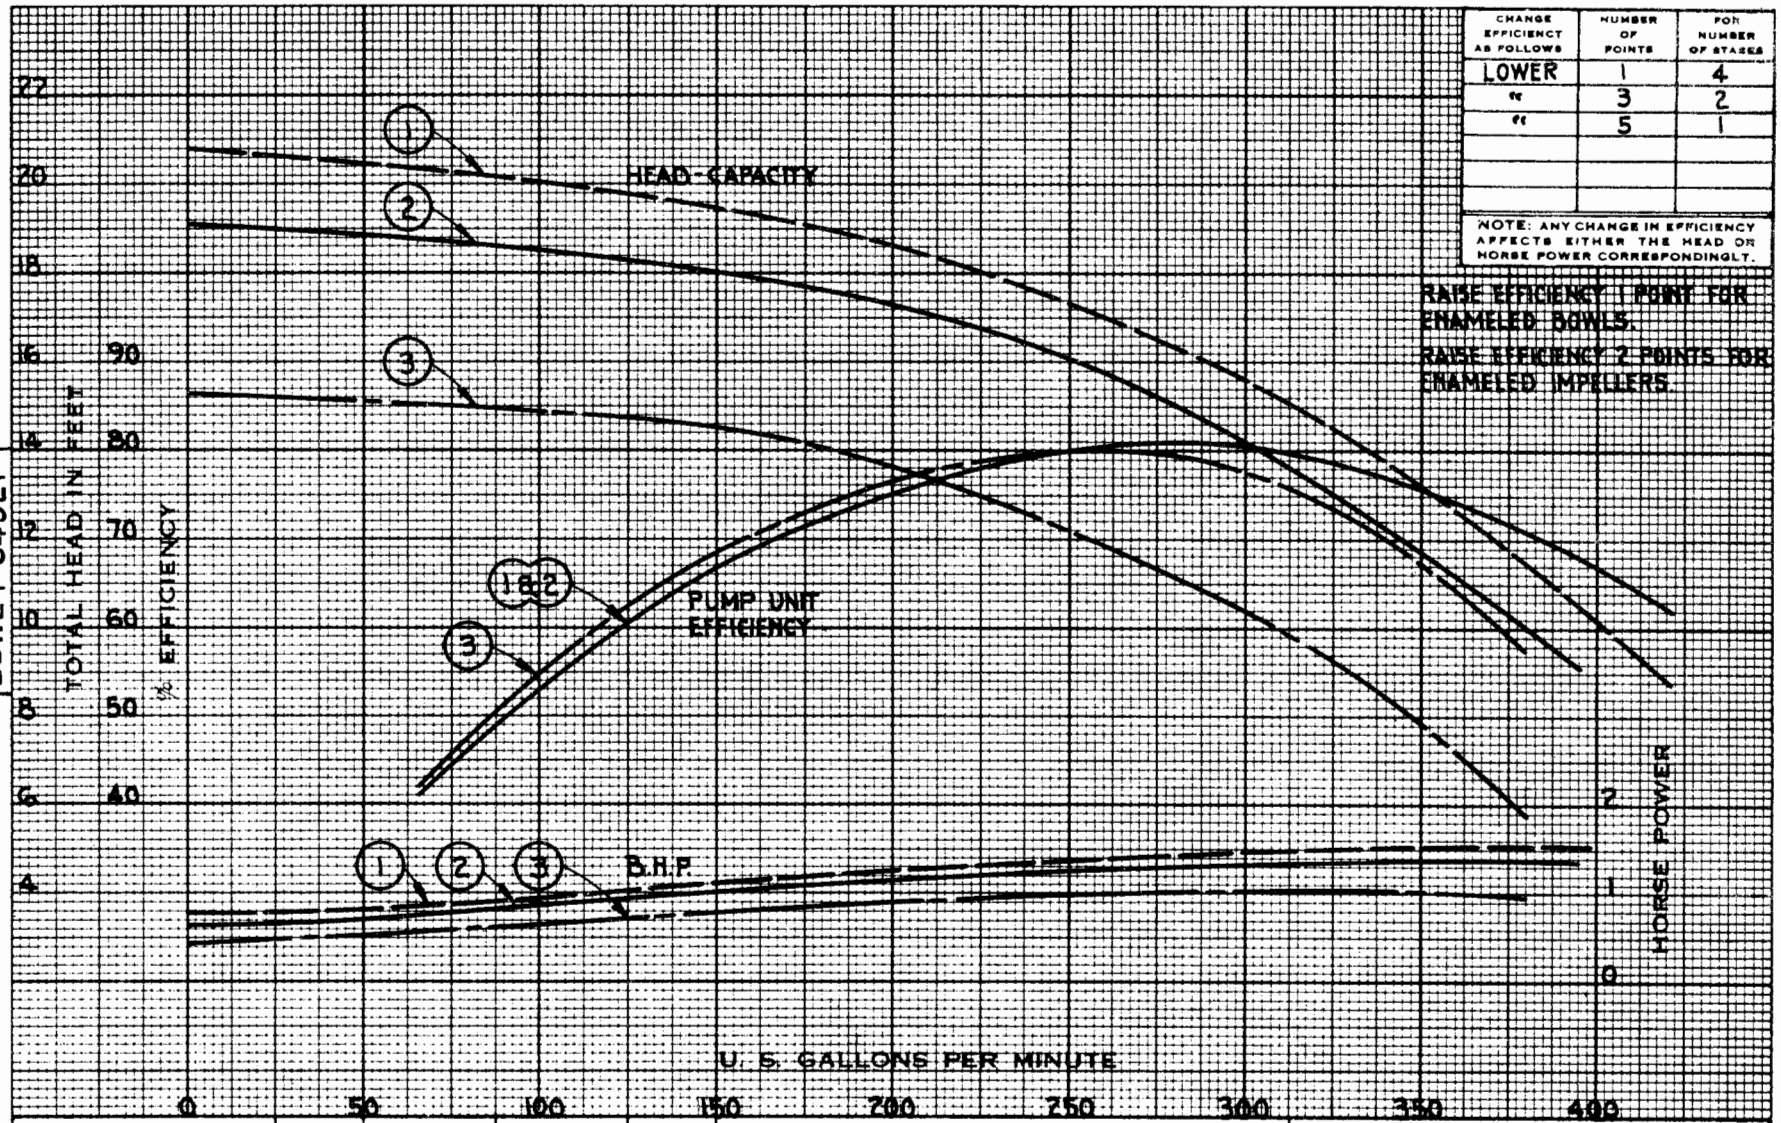

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	4
"	3	2
"	5	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

RAISE EFFICIENCY 1 POINT FOR ENAMELED BOWLS.

RAISE EFFICIENCY 2 POINTS FOR ENAMELED IMPELLERS.

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-84323	6 11/16" UNDERCUT	4276
2	"	6 11/16" STANDARD	4266
3	"	6 3/16" STANDARD	4284

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE

10" LA — DEEP WELL TURBINE PUMP

1160 — R. P. M.

SHEET NO. R-1095

PRINTED IN U. S. A.