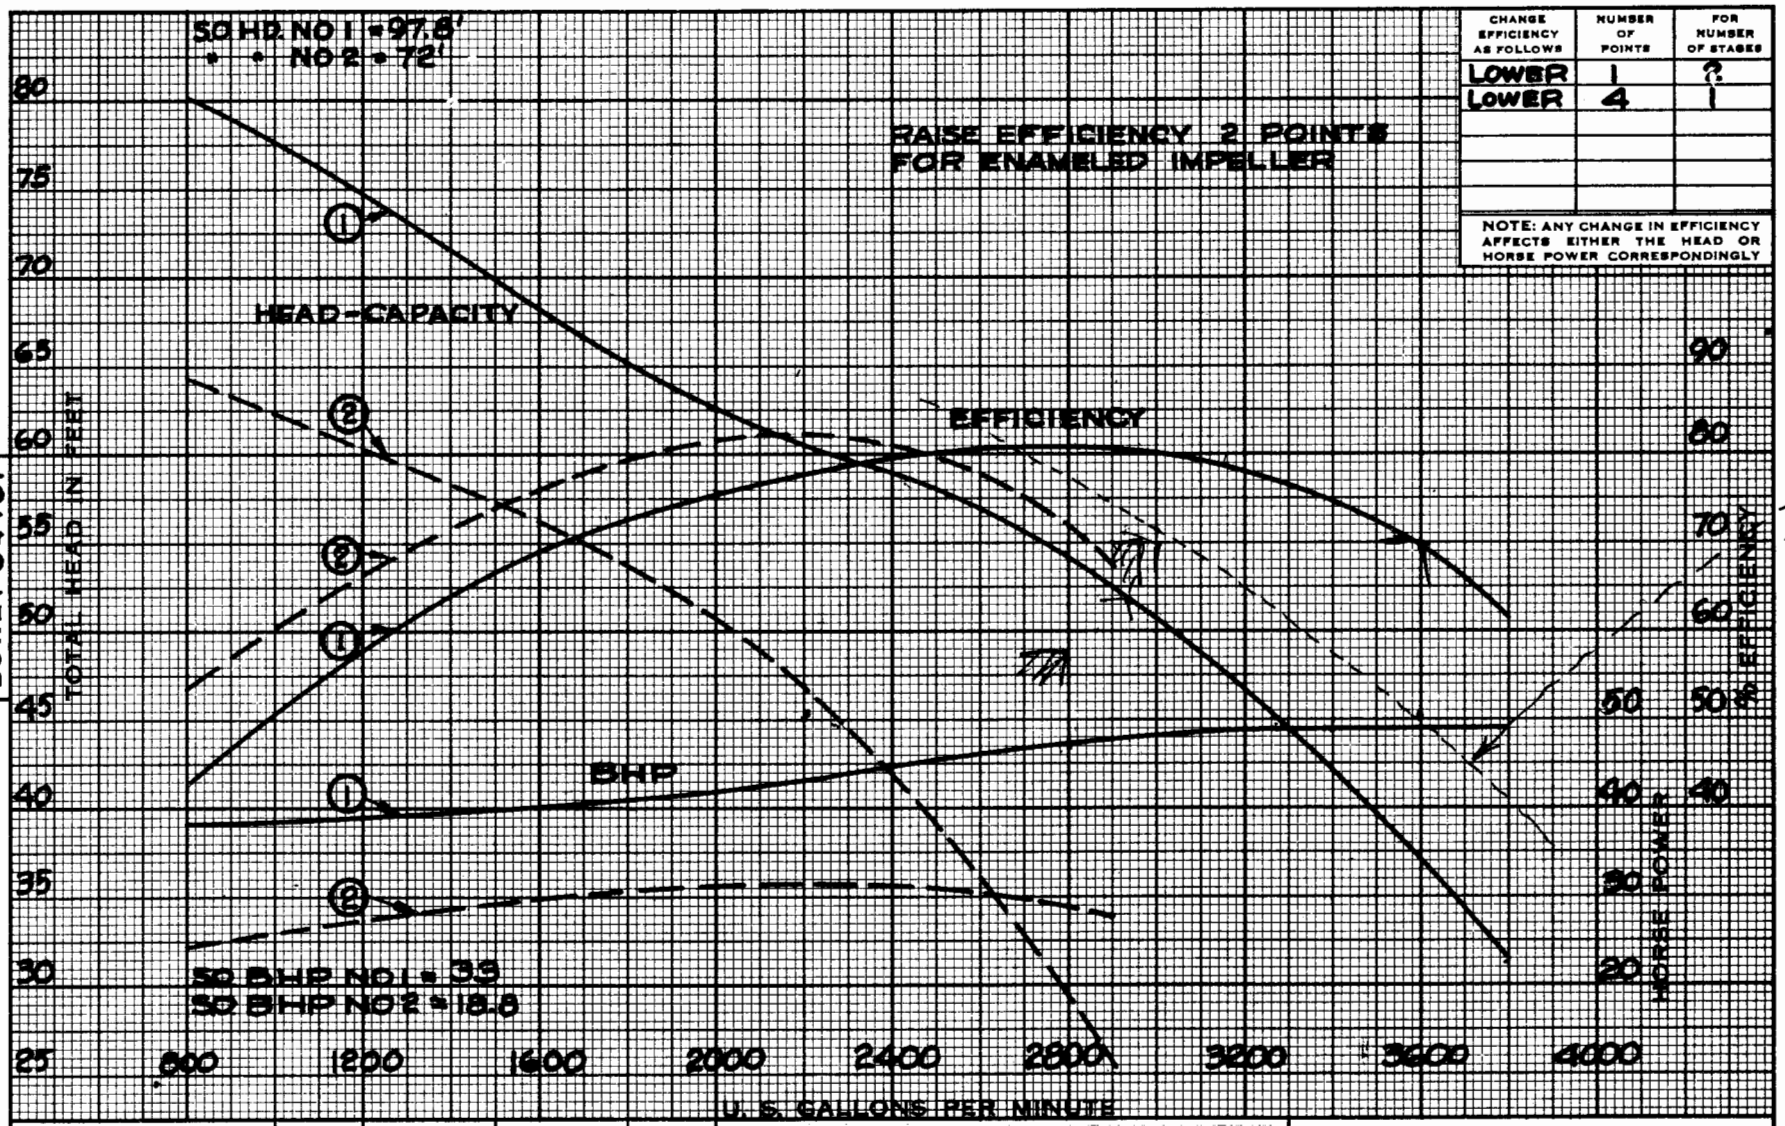

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	2
LOWER	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

BOWL T-84487

Curve 2815940 1185rpm

HYDRAULIC PERFORMANCE	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.	1	V-568C	13"	4809
	2	T-84489	13"	4429
	3			

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMP

PERFORMANCE PER STAGE
18MA DEEP WELL TURBINE PUMP
1160 R. P. M.
SHEET NO. R-1170

PRINTED IN U. S. A.