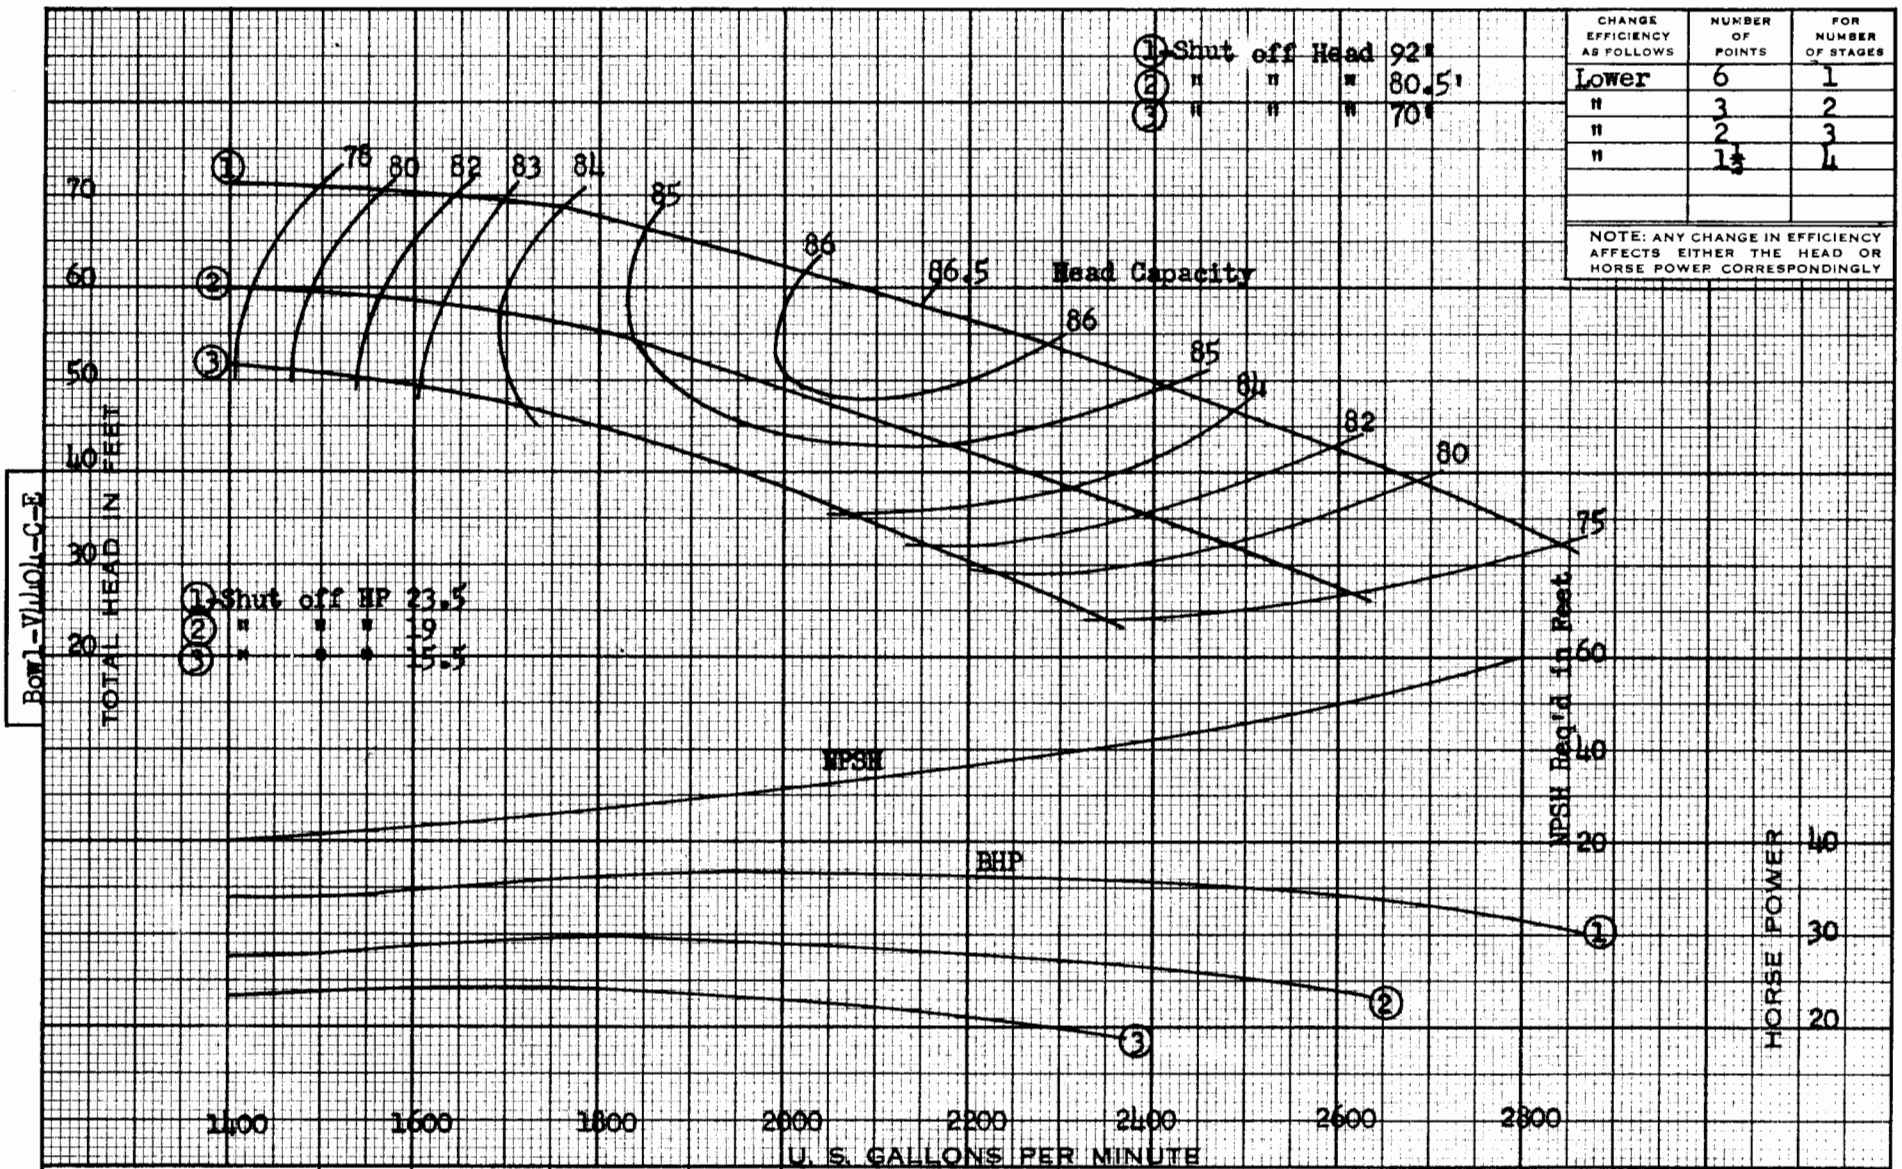

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
Lower	6	1
"	3	2
"	2	3
"	1½	4

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY.

Efficiency must be reduced for bronze & special material bowls - See Application Sec.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	V4399C-E	10-7/16 x 9-5/32	27524
2	V4399C-E	10-1/16 x 8-25/32	
3	V4399C-E	9-11/16 x 8-13/32	

PEERLESS PUMP

fmc CORPORATION

HYDRODYNAMICS DIVISION

Los Angeles 31 · Indianapolis 8

PERFORMANCE per STAGE

14 HXB

1760 R. P. M.

SHEET NO. 2813738