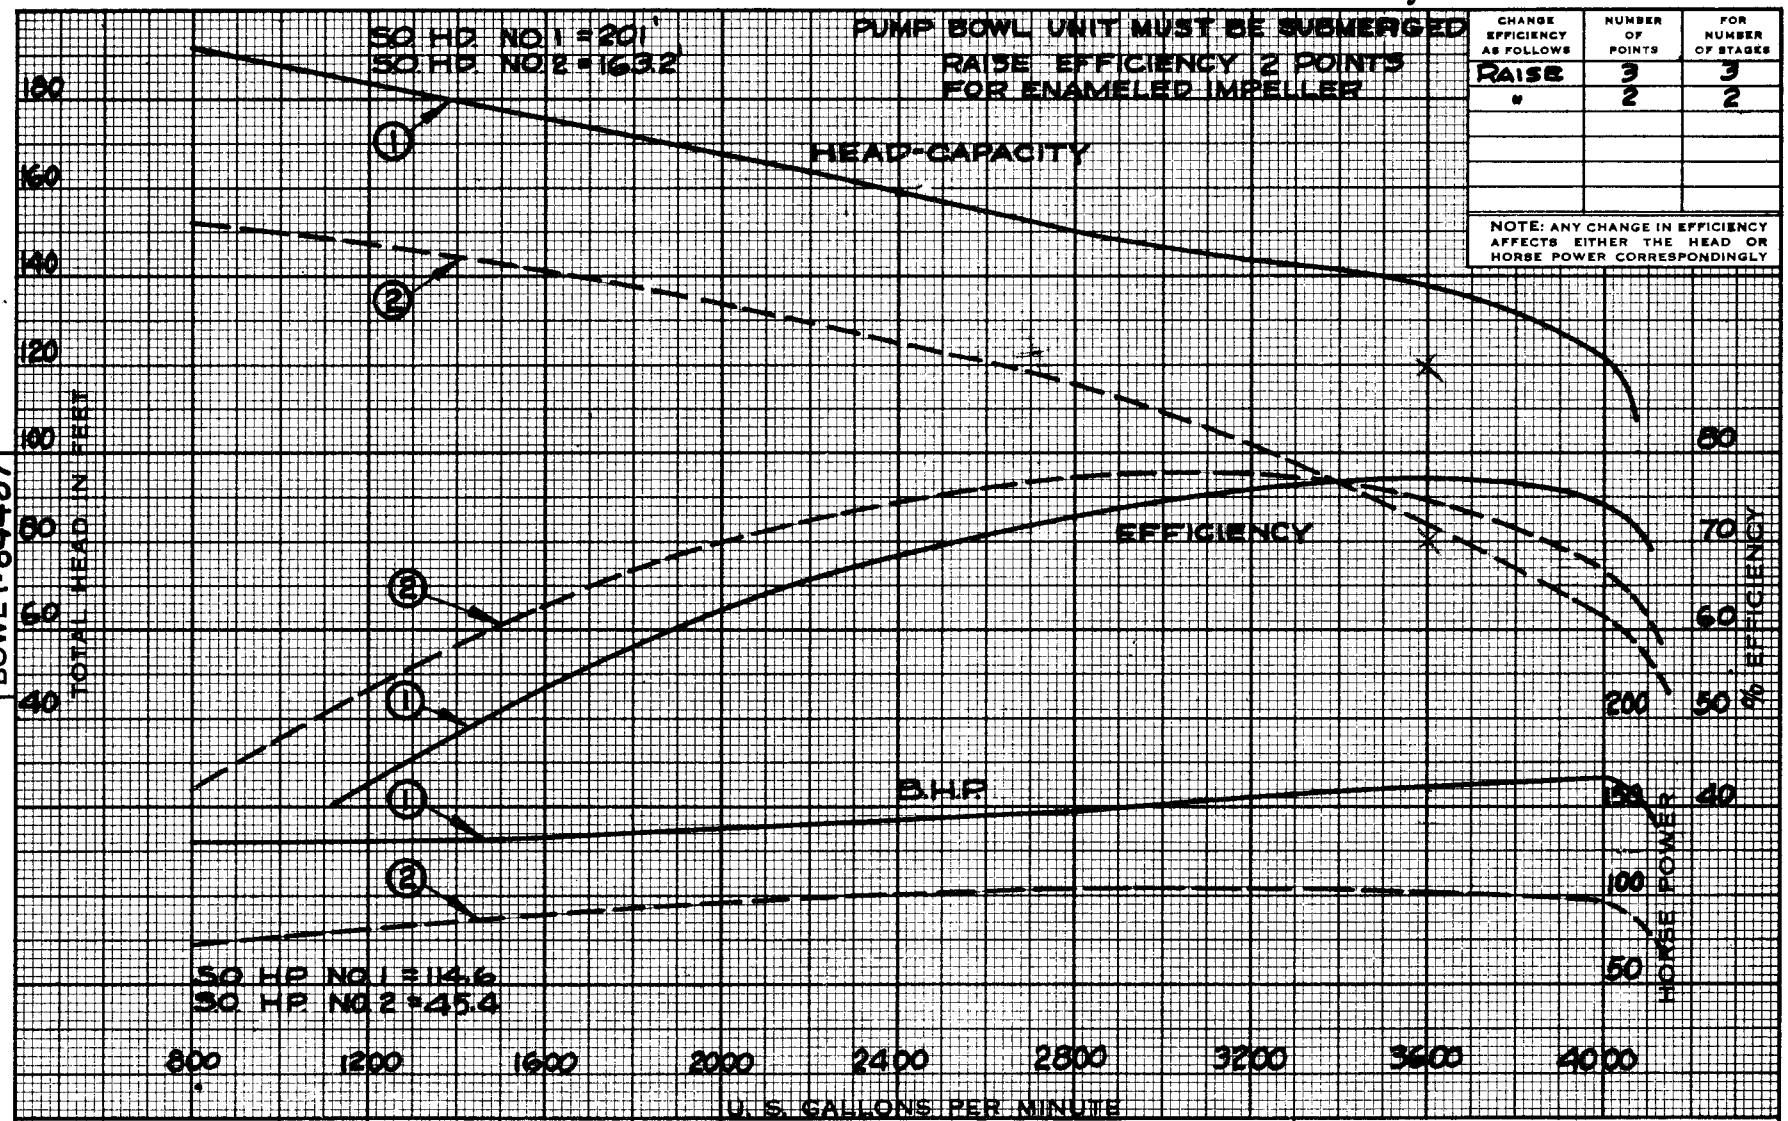

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	3	3
"	2	2

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

BOWL T-84487

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	V-568-C	13"	4810
2	T-84489	13"	4688
3			

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE
18 MA DEEP WELL TURBINE PUMP
1760 R. P. M.
SHEET NO. R-1168

PRINTED IN U. S. A.