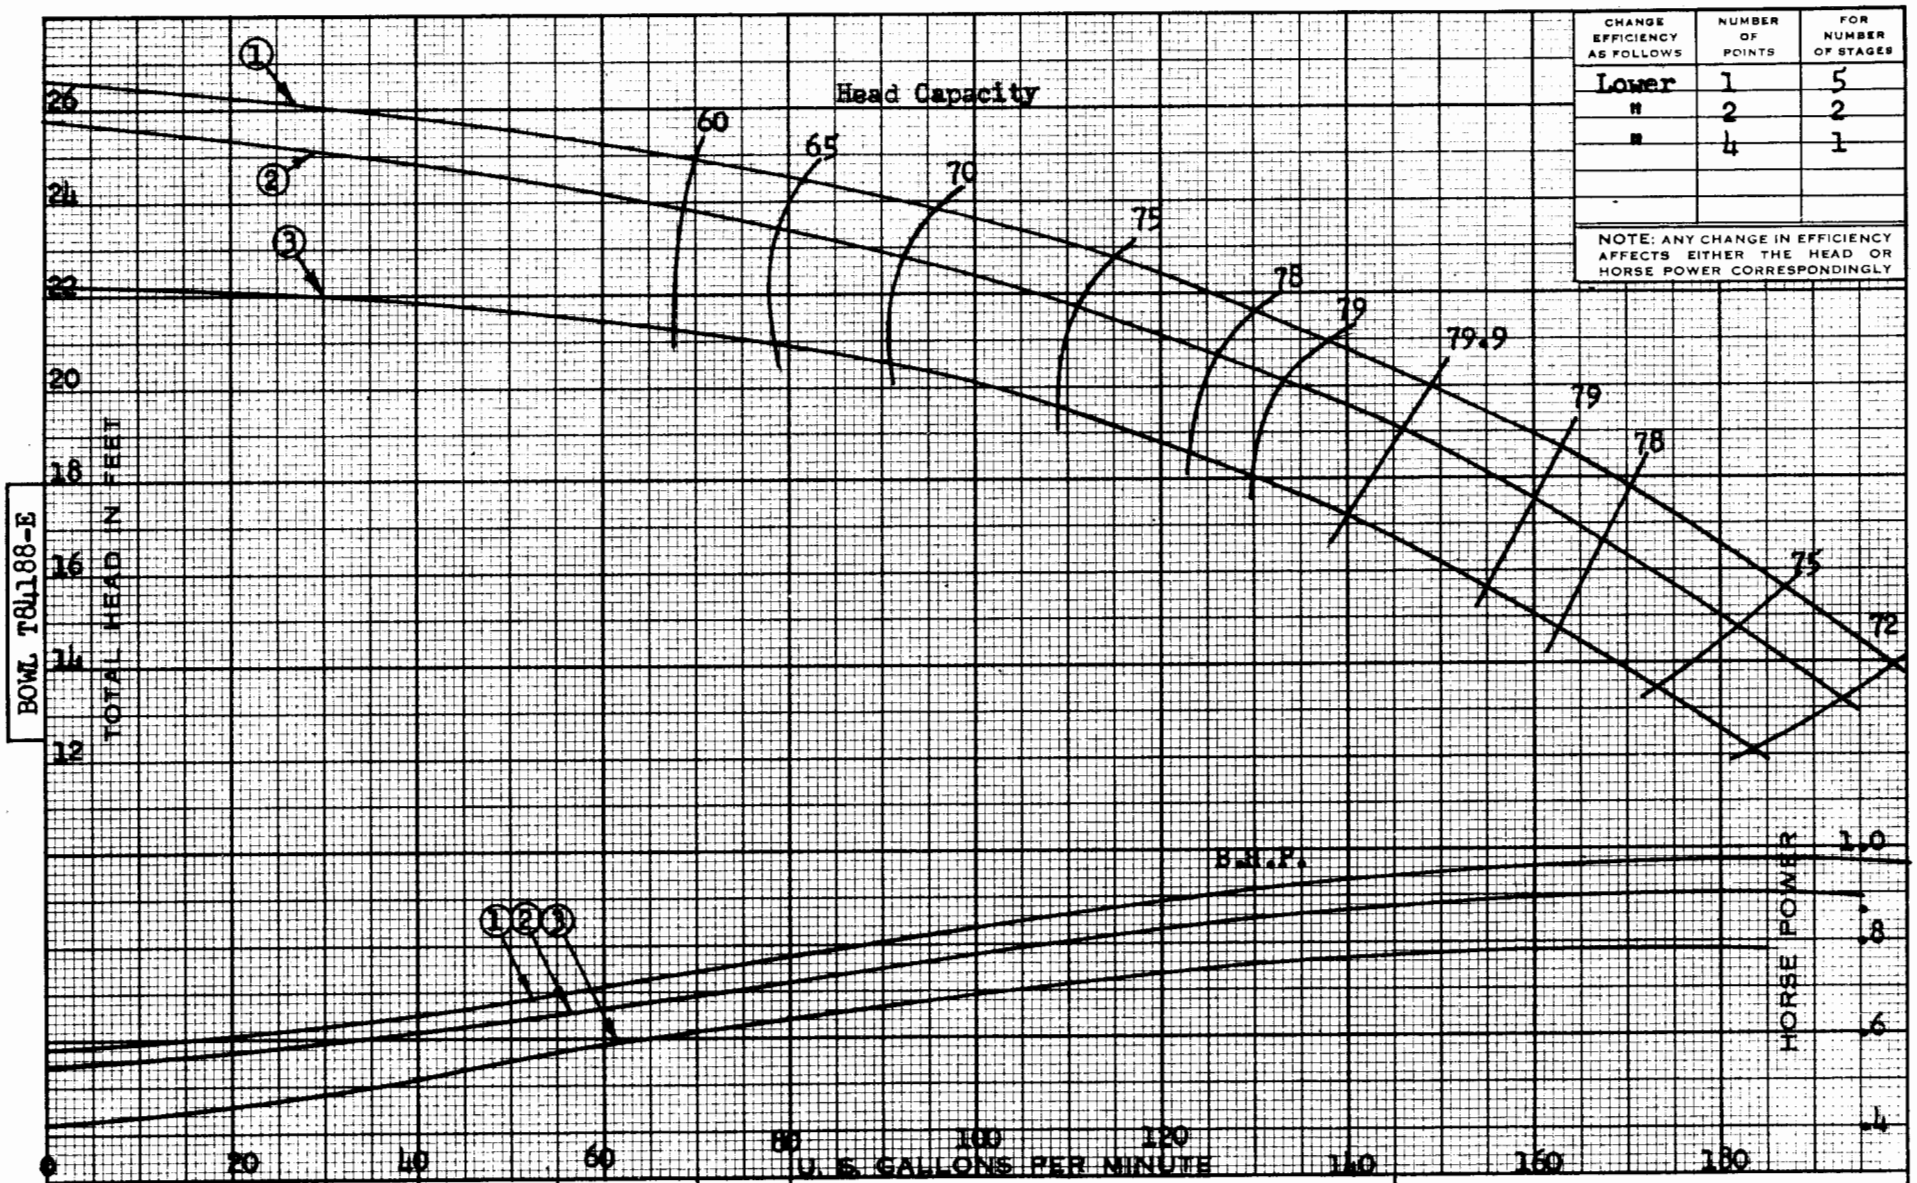

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
Lower	1	5
"	2	2
"	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

BOWL T84188-E

HYDRAULIC PERFORMANCE GUARANTEED AT THE DESIGNATED POINT ONLY.	CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
Efficiency must be reduced for bronze & special material bowls - See Application Section	1	T84186	UNDERCUT 4-29/32	
	2	T84186	STANDARD 4-29/32	27518
	3	T84186	STANDARD 4-23/32	27564

PEERLESS PUMP DIVISION
FOOD MACHINERY AND CHEMICAL CORPORATION
LOS ANGELES 31, CALIFORNIA

PEERLESS PUMPS

PERFORMANCE PER STAGE

7 LA

1760 R. P. M.

SHEET NO. 2811892

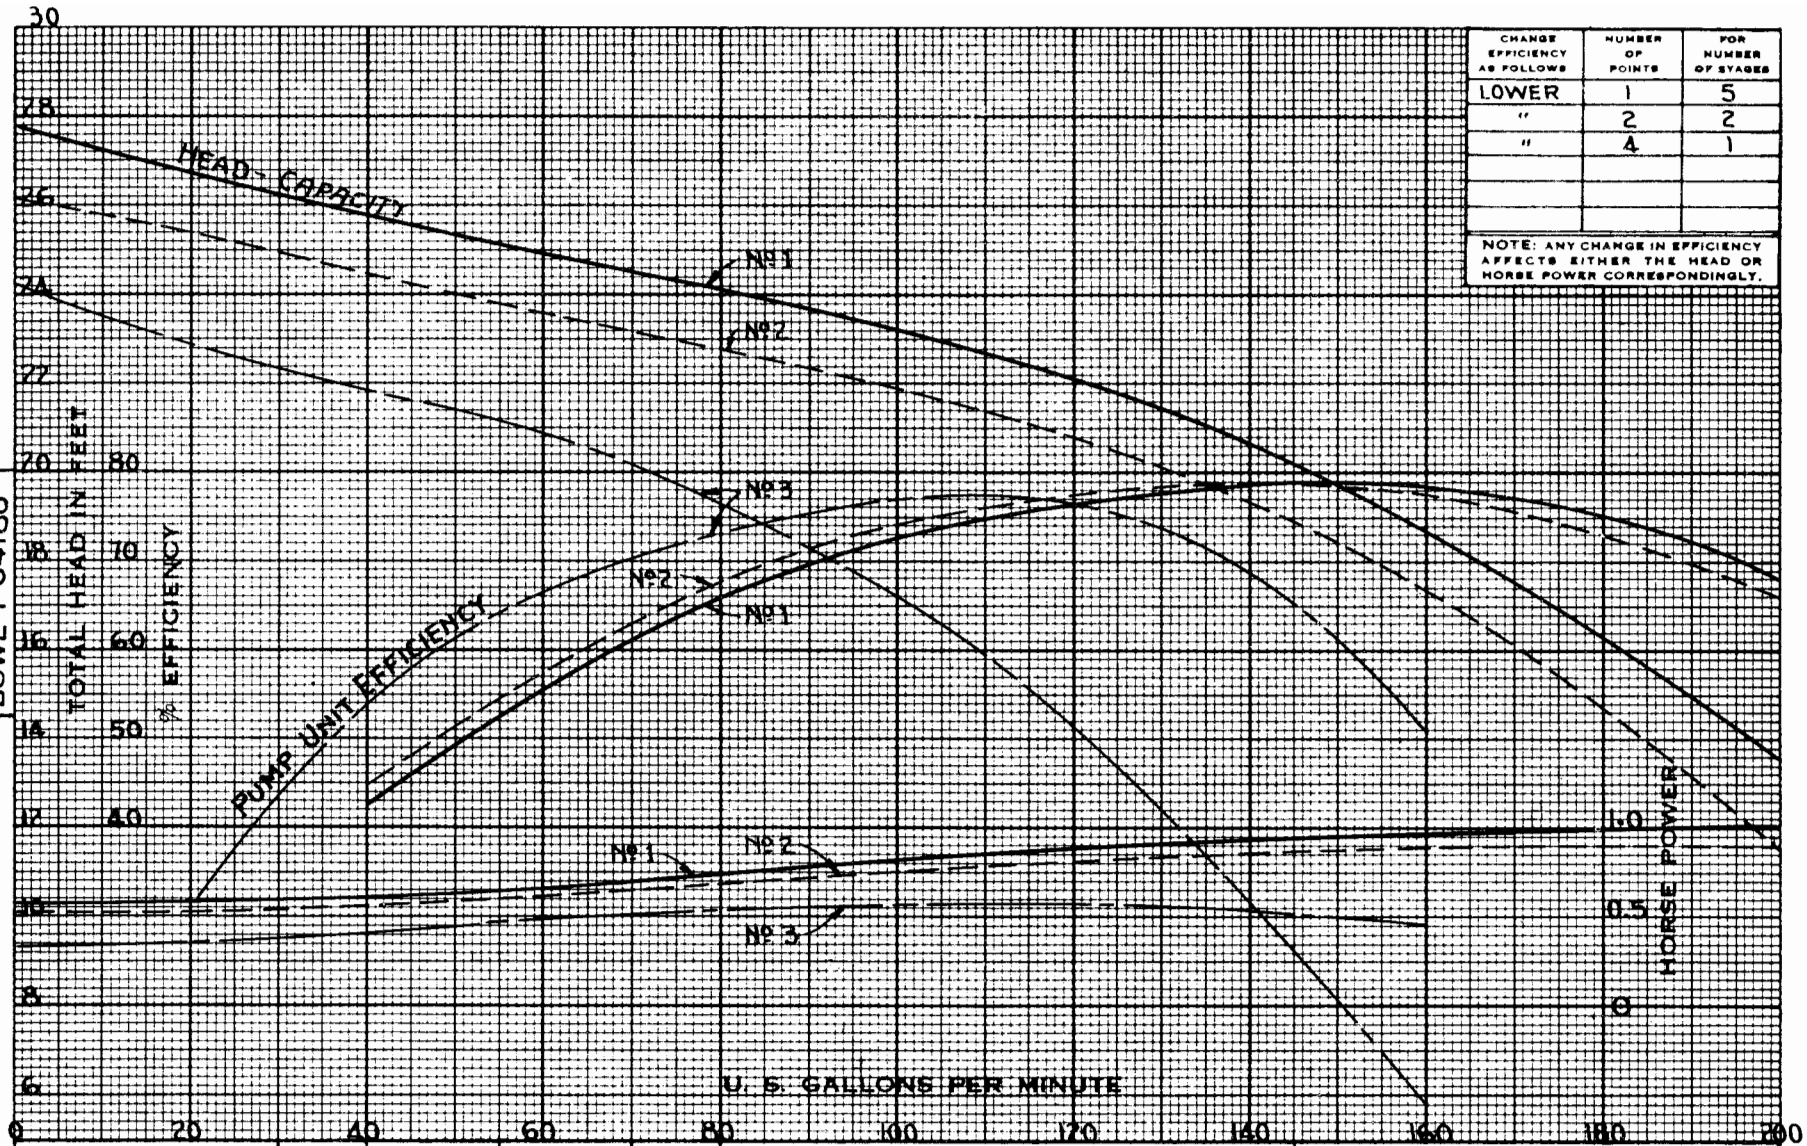

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	5
"	2	2
"	4	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-84186	4 29/32" UNDERCUT.	4126
2	T-84186	4 29/32" STANDARD	4128
3	T-84309	4 29/32" STANDARD.	4204

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE

7" LA — DEEP WELL TURBINE PUMP

1760 — R. P. M.

SHEET NO. R-1060

PRINTED IN U. S. A.