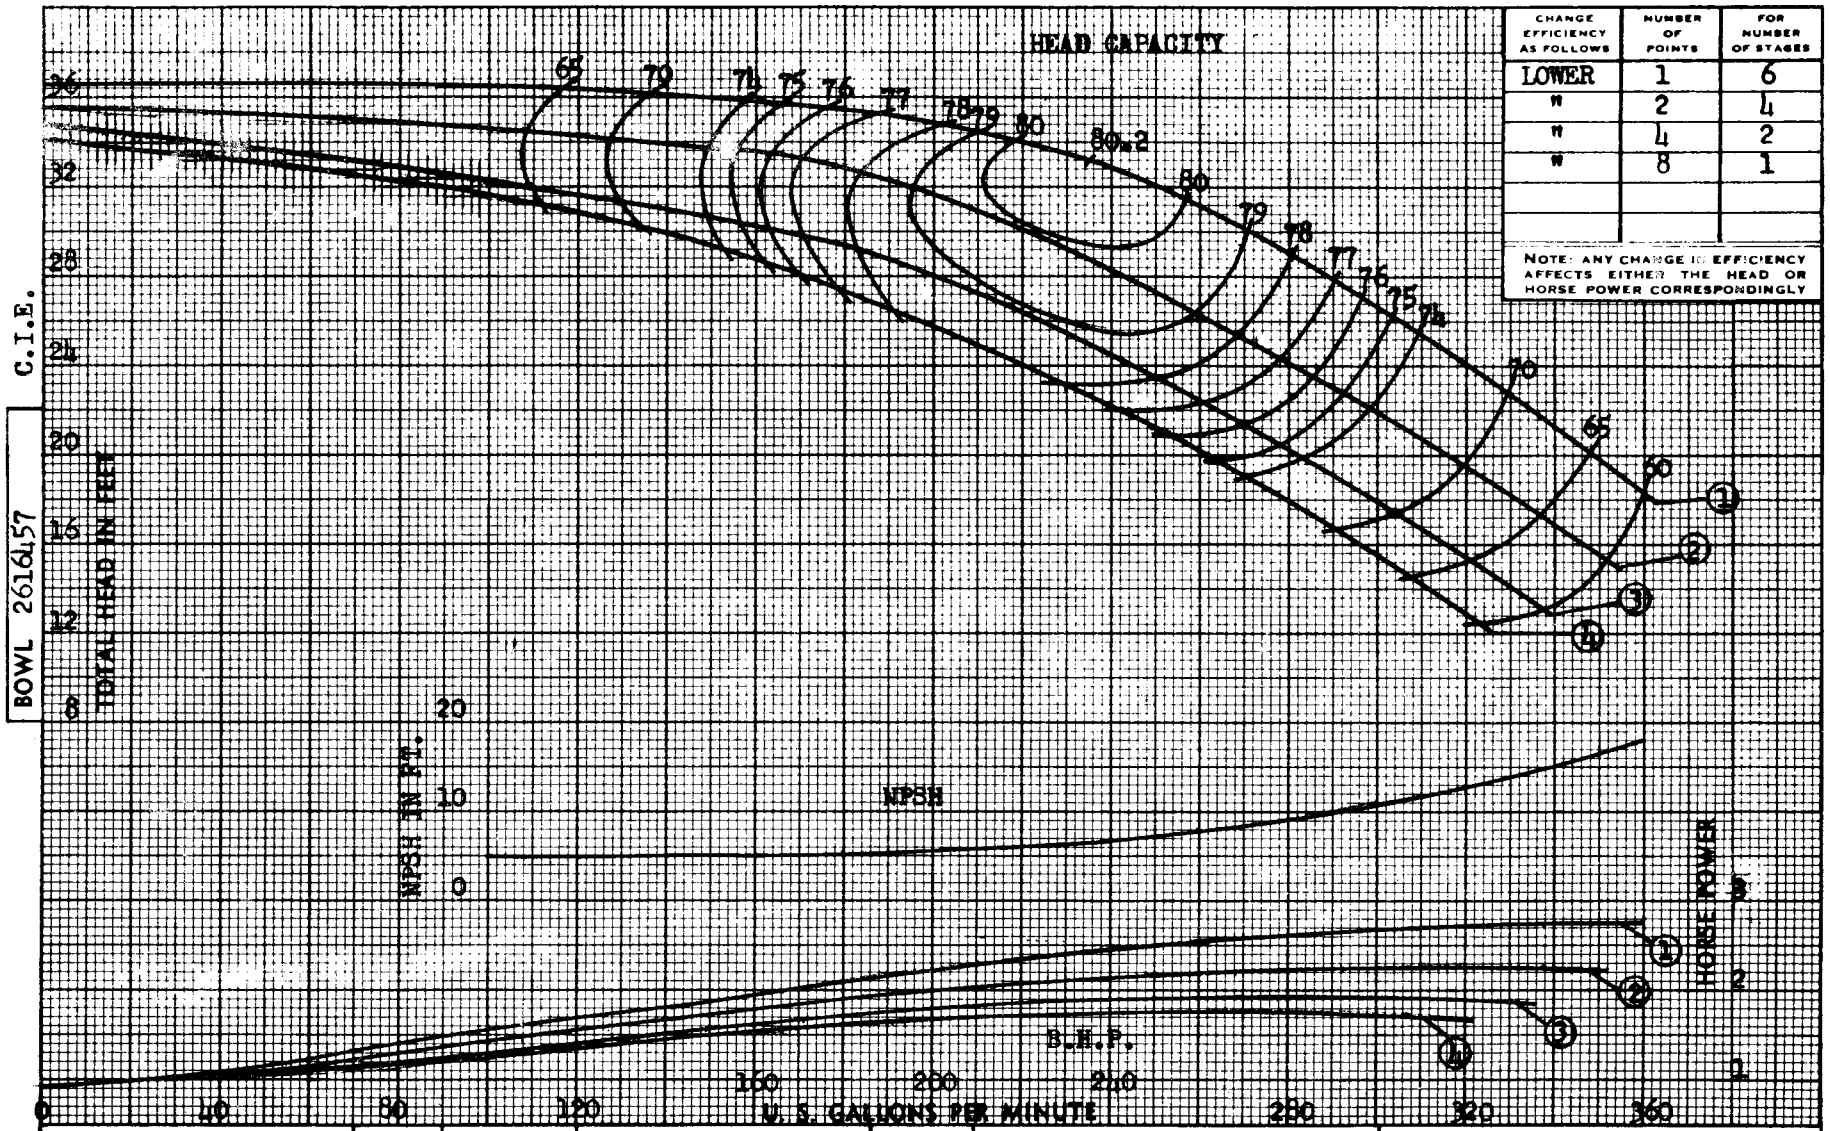

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	6
"	2	4
"	4	2
"	8	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE

GUARANTEED AT THE DESIGNATED POINT ONLY AND IS CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH NON-AERATED OR NON-GASEOUS WATER FREE FROM ABRASIVES. PUMP BOWLS MUST BE PROPERLY ADJUSTED FOR THE HEAD AT WHICH THEY OPERATE AND MUST BE SUBMERGED.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	2616465	5-15/16	35481
2	2616465	5-11/16 x 5-15/16	37215
3	2616465	5-7/16 x 5-15/16	37225
4	2616465	5-3/16 x 5-15/16	37322

PEERLESS PUMP

HYDRODYNAMICS DIVISION

PERFORMANCE PER STAGE

8 LB — DEEP WELL TURBINE PUMP

1760 — R. P. M.

SHEET NO. 2831691

PRINTED IN U. S. A.