# VERTICAL TURBINE PUMPS

Peerless Pumps

Total Head in Feet for ____ Stages

Horsepower for ____ Stages

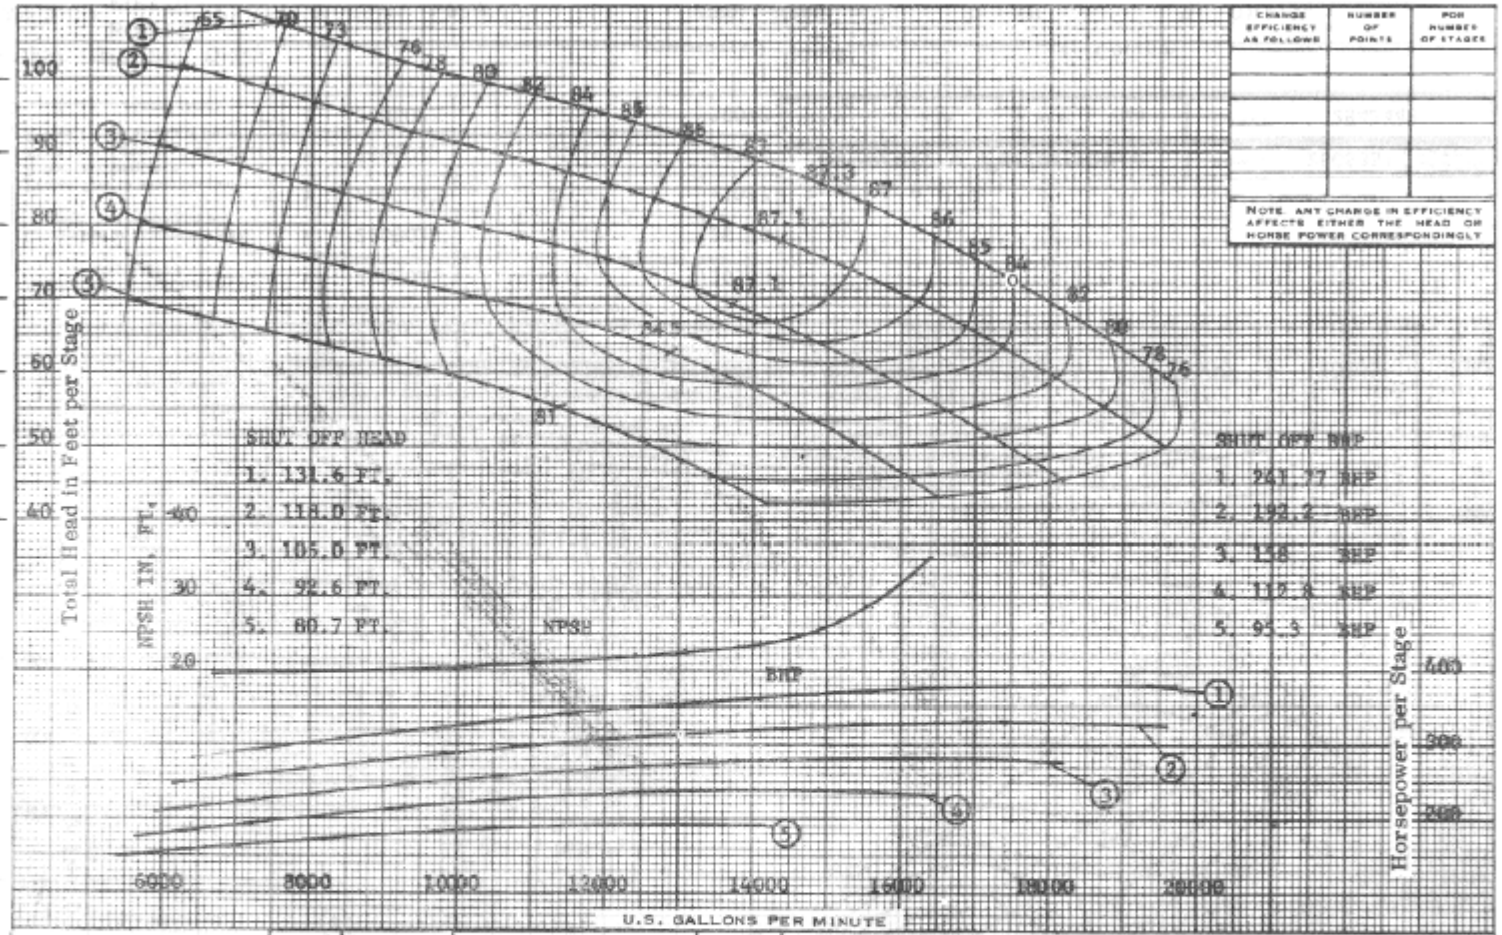


| CHANGE EFFICIENCY AS FOLLOWS | NUMBER OF POINTS | FOR NUMBER OF STAGES |
|---|---|---|
| | | |
| | | |
| | | |
| | | |

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY

**HYDRAULIC PERFORMANCE WARRANTY**

Guaranteed at designated point only, and contingent on:

Proper flow to pump suction
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

| CURVE | IMPELLER | IMPELLER DIA. | FROM |
|---|---|---|---|
| 1 | 2604215 | 27⅛" | 32709 |
| 2 | 2604215 | 26⅛" | 37426 |
| 3 | 2604215 | 25¼" | 35793 |
| 4 | 2604215 | 24⅝" | 30060 |
| 5 | 2604215 | 23½" | 30039 |

Customer _____

Item _____

Peerless Ref. No: _____

**Laboratory Performance**

| SIZE | 36 MA | RPM | 705 | BOWL | 2621477 PLASTIC COATED | CURVE | 2847490 |
|---|---|---|---|---|---|---|---|

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED BOWL ☐ FIELD ☐ PERFORMANCE: Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____