BOWL T-80670

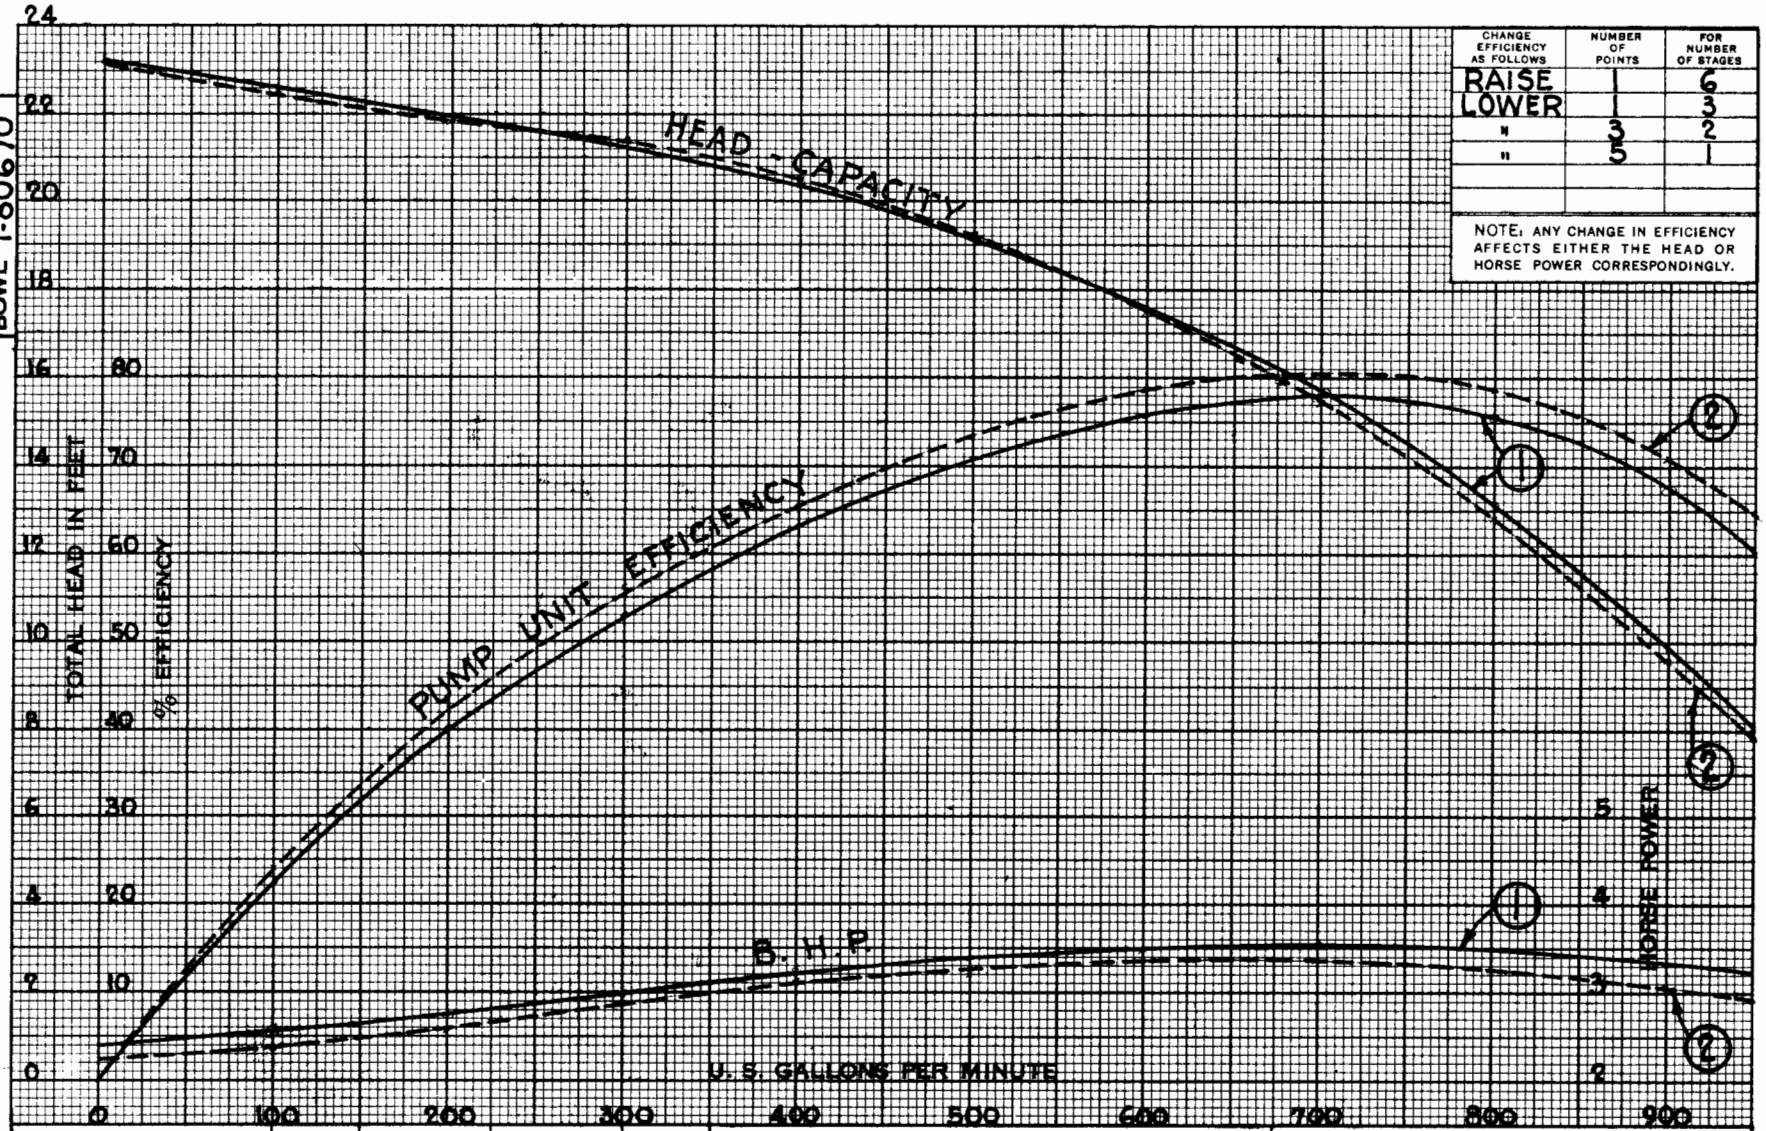

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	6
LOWER	1	3
"	3	2
"	5	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

HYDRAULIC PERFORMANCE

CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH THE AMOUNT OF NON-AERATED OR NON-GASEOUS WATER FREE FROM DETRITUS AT ANY HEAD ON THIS CURVE.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-80199	10 1/8	T-2205
2	T-80199E	10 1/8	T-2219
3			

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE

14" H — DEEP WELL TURBINE PUMP

870 — R. P. M.

SHEET NO. R-345

PRINTED IN U. S. A.