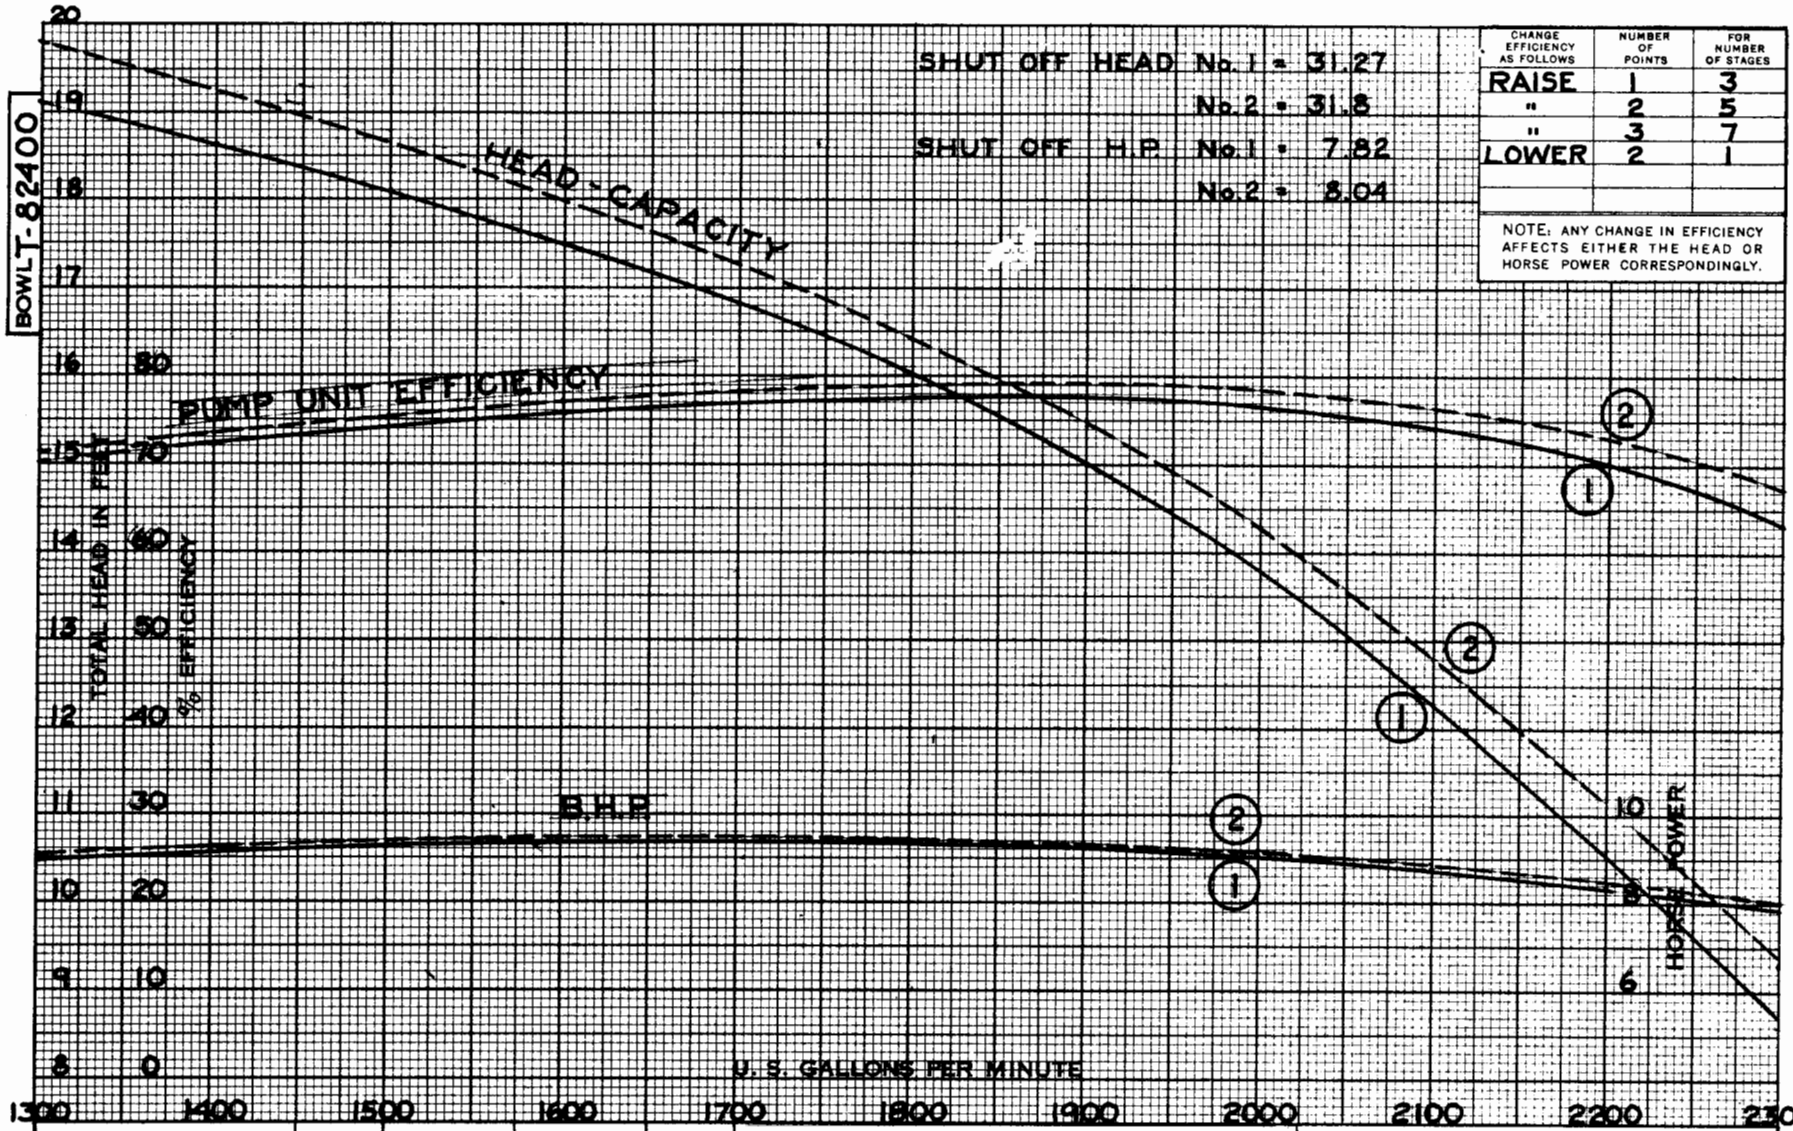

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
RAISE	1	3
"	2	5
"	3	7
LOWER	2	1

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

HYDRAULIC PERFORMANCE

CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH THE AMOUNT OF NON-AERATED OR NON-GASEOUS WATER FREE FROM DETRITUS AT ANY HEAD ON THIS CURVE.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-82378	$9\frac{11}{16} \times 11\frac{5}{8}$	F2533
2	T-82378-E	" "	T-2554
3			

PEERLESS PUMP DIVISION

FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMP

PERFORMANCE PER STAGE

16" HXX — DEEP WELL TURBINE PUMP

870 — R. P. M.

SHEET NO. R-494

PRINTED IN U.S.A.