BOWL T-82112

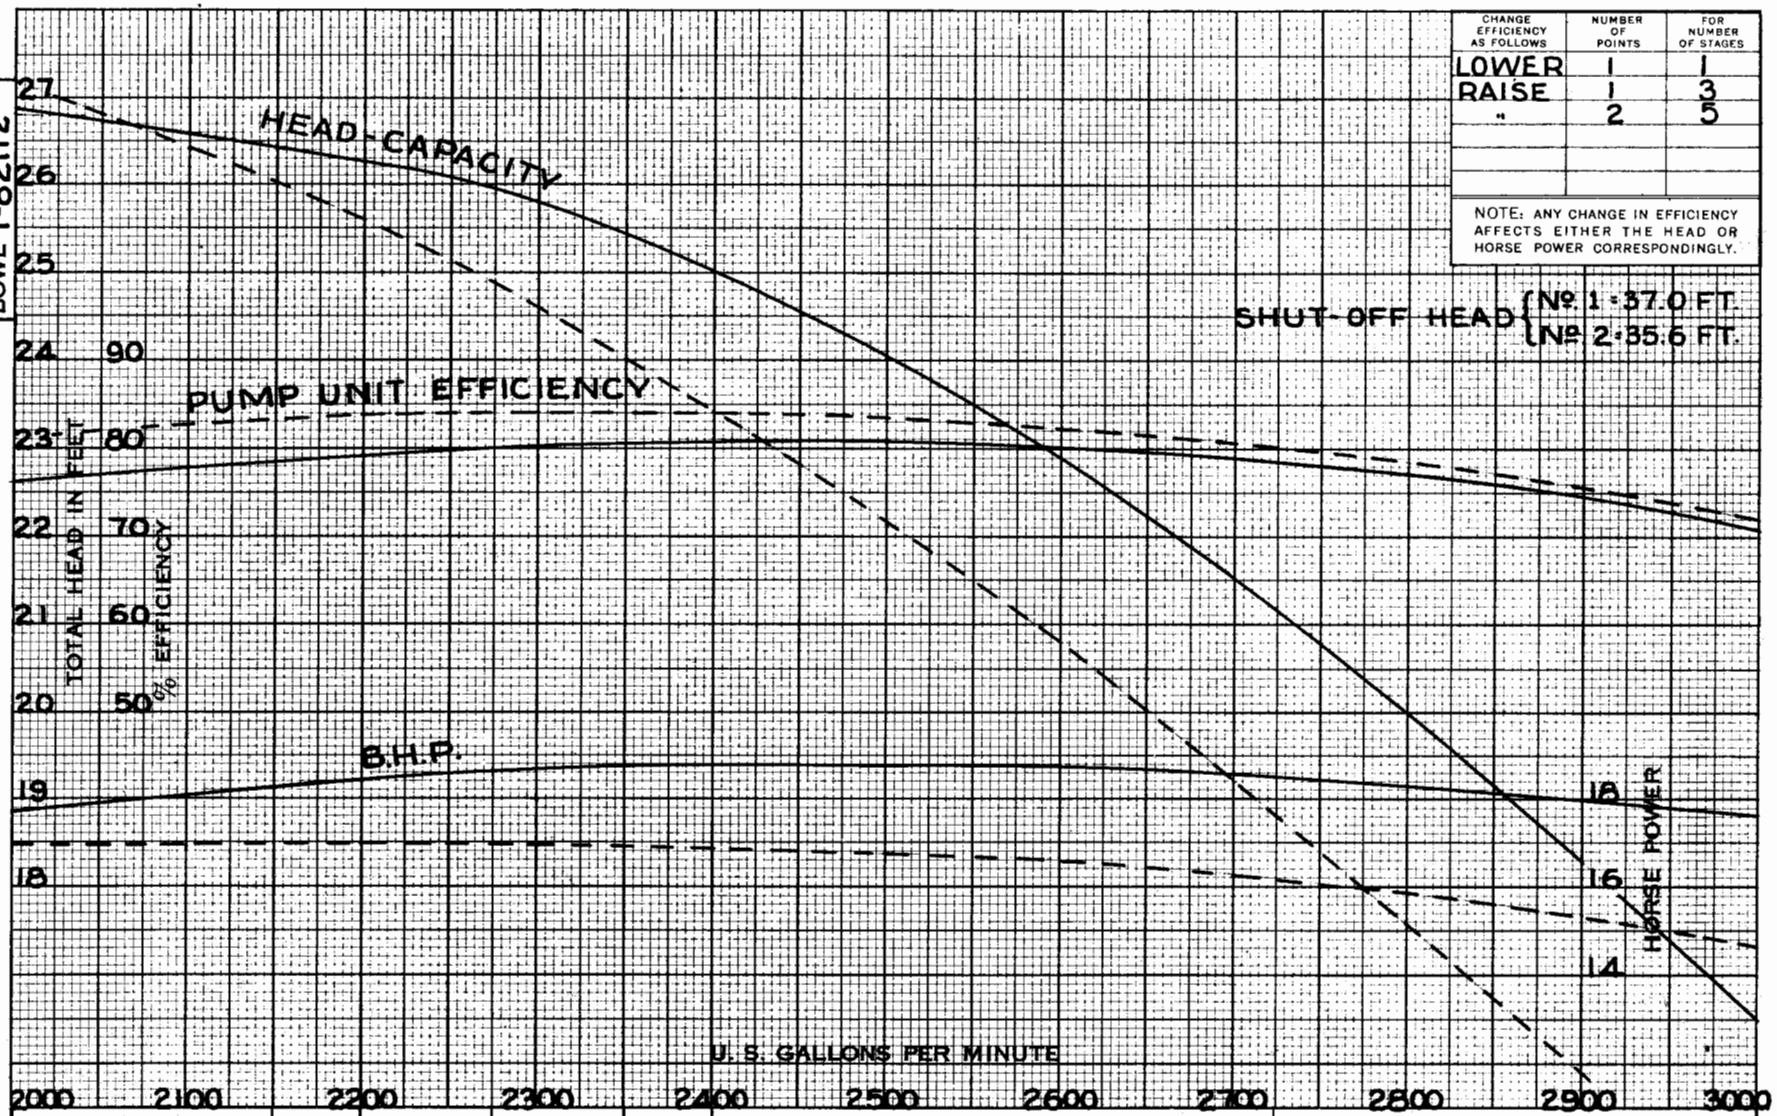

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR NUMBER OF STAGES
LOWER	1	1
RAISE	1	3
"	2	5

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS EITHER THE HEAD OR HORSE POWER CORRESPONDINGLY.

HYDRAULIC PERFORMANCE

CONTINGENT ON WELL PROPERLY FURNISHING PUMP WITH THE AMOUNT OF NON-AERATED OR NON-GASEOUS WATER FREE FROM DETRITUS AT ANY HEAD ON THIS CURVE.

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	T-82147	$11\frac{1}{2}'' \times 13\frac{1}{8}''$	T-2144
2	T-82147E	$11\frac{1}{2}'' \times 13\frac{1}{8}''$	T-1997
3			

PEERLESS PUMP DIVISION
FOOD MACHINERY CORPORATION
LOS ANGELES 31, CALIF.

PEERLESS PUMPS

PERFORMANCE PER STAGE

18H — DEEP WELL TURBINE PUMP

870 — R. P. M.

SHEET NO. R-329

PRINTED IN U. S. A.