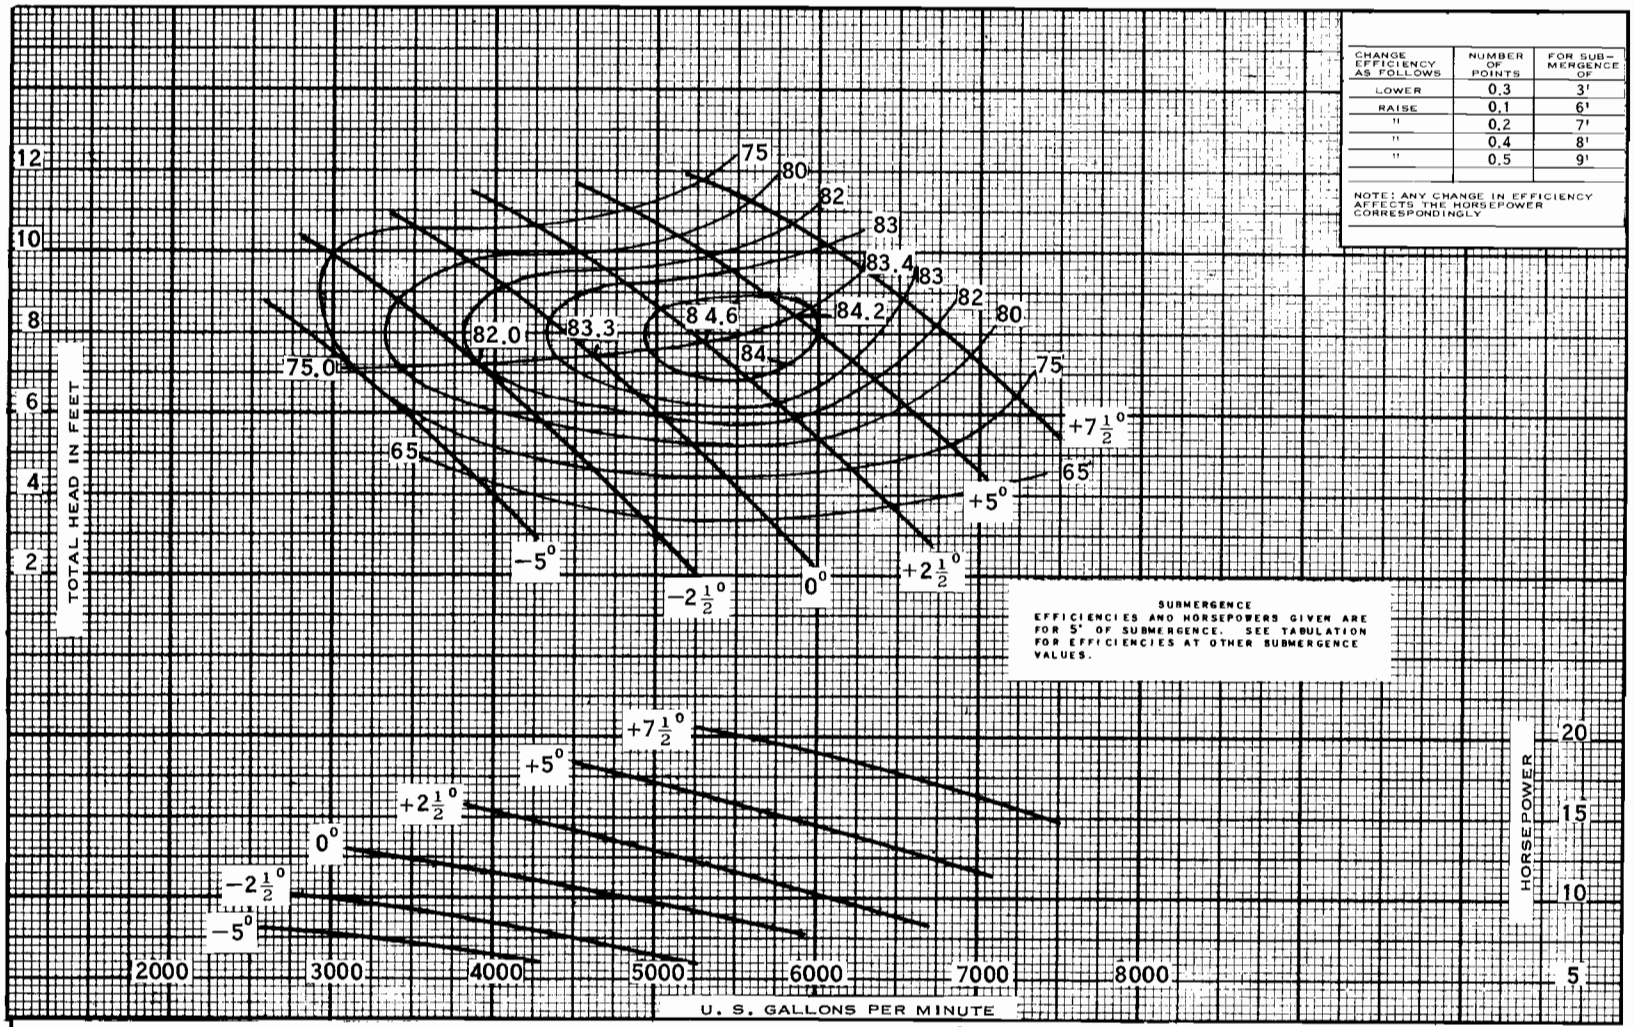

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF POINTS	FOR SUB-MERGENCE OF
LOWER	0.3	3'
RAISE	0.1	6'
"	0.2	7'
"	0.4	8'
"	0.5	9'

NOTE: ANY CHANGE IN EFFICIENCY AFFECTS THE HORSEPOWER CORRESPONDINGLY

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

Proper sump configuration
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

GUARANTEED

☐ BOWL
☐ FIELD

PERFORMANCE

CAPACITY	GPM
TOTAL DYNAMIC HEAD	FT
EFFICIENCY	
BRAKE HORSEPOWER	BHP

FMC Pump Division

LABORATORY PERFORMANCE

SIZE 18 PL

RPM 870

CURVE NUMBER V4131A

DESCRIPTION: Hydro-Foil Pump with: Bowl T83845 ; Propeller T83846

Elbow ☐ above ☐ below base dia with _____ x _____ inner column

Driver: _____

PEERLESS

Customer _____

Item _____

Peerless Ref. No. _____ Pump No. _____

FMC Corporation
Pump Division

SUBJECT TO CHANGE WITHOUT NOTICE