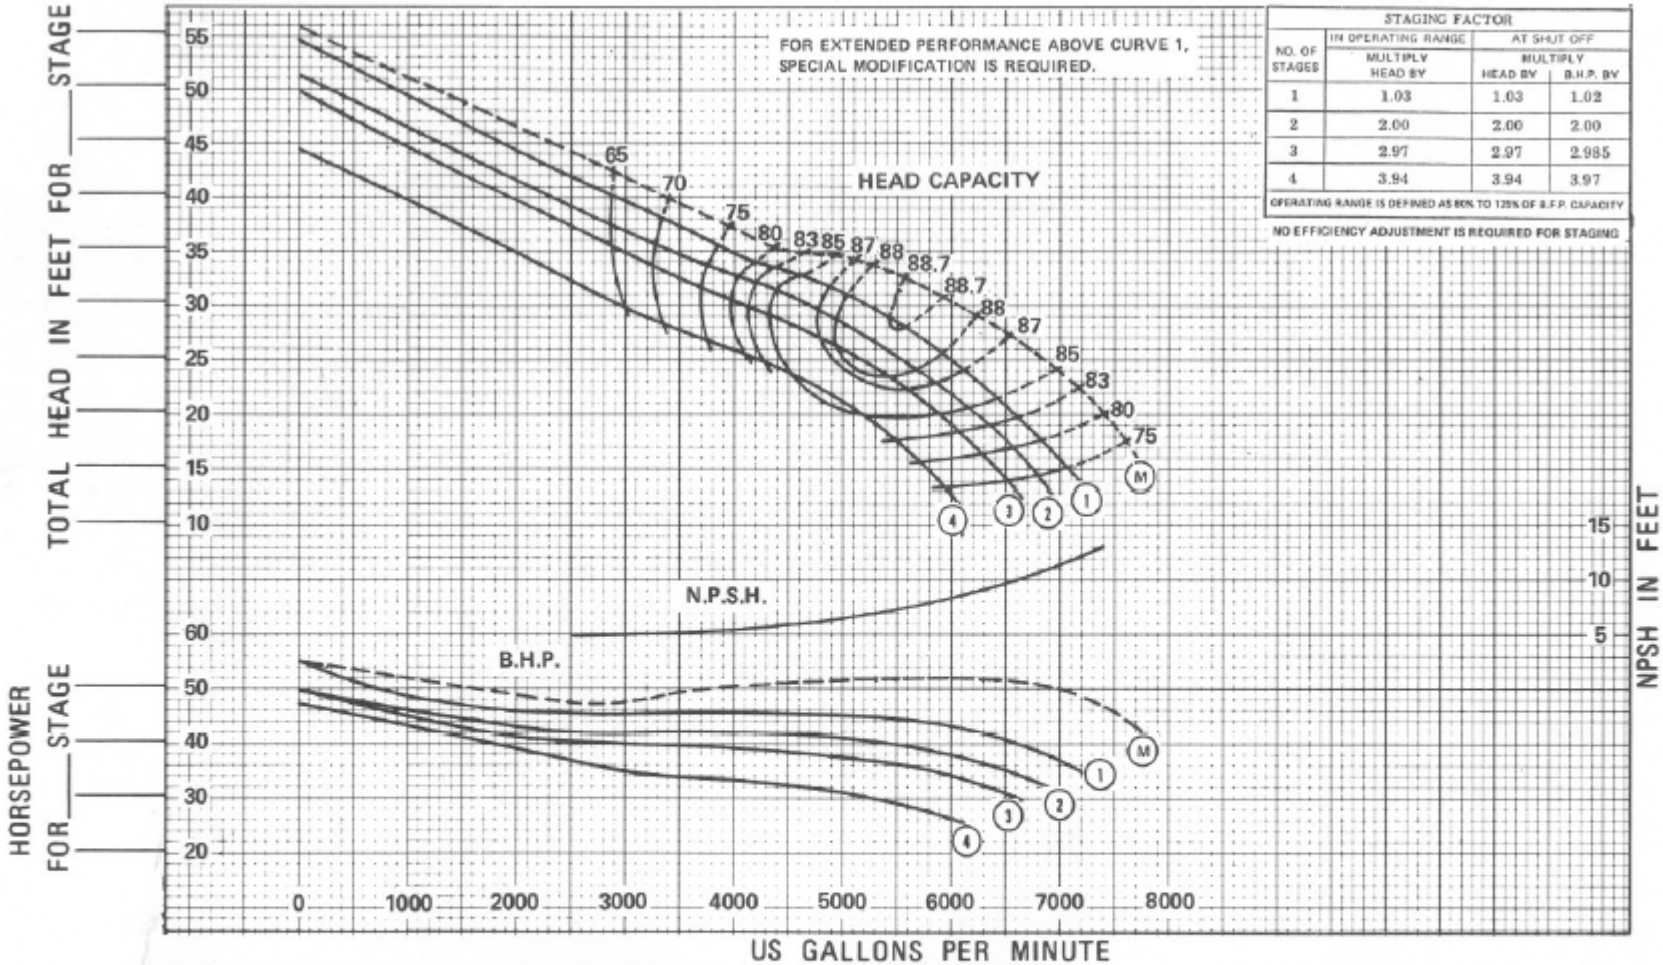

STAGING FACTOR			
NO. OF STAGES	IN OPERATING RANGE	AT SHUT OFF	
	MULTIPLY HEAD BY	MULTIPLY HEAD BY	MULTIPLY B.H.P. BY
1	1.03	1.03	1.02
2	2.00	2.00	2.00
3	2.97	2.97	2.985
4	3.94	3.94	3.97

OPERATING RANGE IS DEFINED AS 80% TO 120% OF B.E.P. CAPACITY

NO EFFICIENCY ADJUSTMENT IS REQUIRED FOR STAGING

HYDRAULIC PERFORMANCE WARRANTY

Guaranteed at designated point only, and contingent on:

Proper flow to pump suction
Proper submergence
Fluid free of gas, air & abrasives
Proper lateral setting of impeller

CURVE NO.	IMPELLER NO.	IMPELLER DIA.	TAKEN FROM
1	4600652	11-29/32" x 15-17/32"	57177
2	4600652	11-13/32" x 15-5/16"	57494
3	4600652	10-27/32" x 15-1/16"	57550
4	4600652	10" x 14-23/32"	57575
M	4600652	FULL DIAMETER EXTENDED PERFORMANCE	57290

Customer _____

Item _____

Peerless Ref. No:

Laboratory Performance

BOWL 4600117 C.I. PLASTIC COATED

SIZE 20HH RPM 885 CURVE 4806189

PUMP DESCRIPTION: Driver _____; Head _____; Column _____

GUARANTEED PERFORMANCE: BOWL ☐ FIELD ☐ Capacity _____ gpm; Head _____ ft; Eff _____ %; BHP _____