SIMFLO PUMPS

SM5C

1770 R.P.M.

SECTION	202
PAGE	5
DATE	7/1/99
SUPERCEDES	All Previous

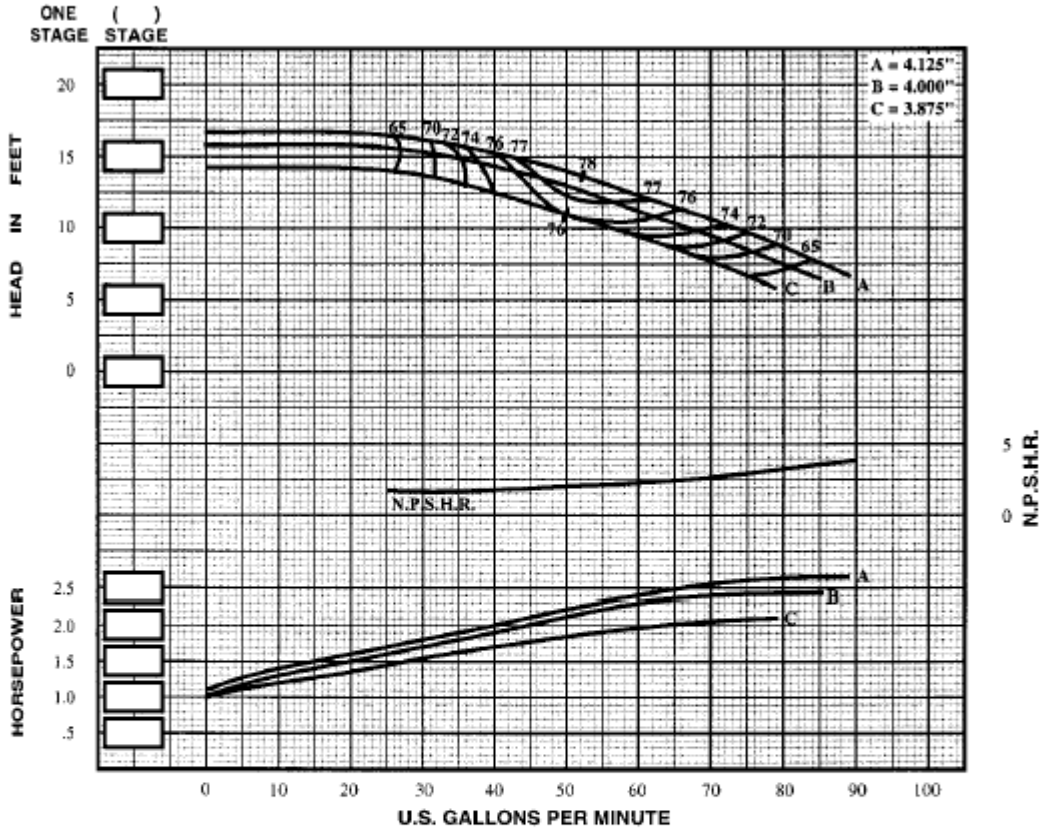

IMPELLER TYPE	=	enclosed	STD. SHAFT DIA.	=	.875"	NO. STAGES	EFF. CHANGE	MATERIAL	B.E.P. EFF. CHANGE
IMPELLER NO.	=	SS5XL	MAX. SHAFT DIA.	=	.875"				
IMPELLER WT. - LBS.	=	1.70	STD. LATERAL	=	.075"	1	-4	IMP. - C.I.	-4
ONE STAGE WT. - LBS.	=	.50	DISCHARGE SIZES	=	3" - 4"	2	-3	IMP. - NI-RI	-3
ADD'L STAGE WT. - LBS.	=	14	SUCTION SIZES	=	4"	3	-2	IMP. - S.S.	-6
MAX. SPHERE SIZE	=	.375"	ONE STAGE WR^2	=	.015	4	-1	BOWL - BRZ.	-3
MIN. SUBMERGENCE	=	10"	K FACTOR (max)	=	2.30	5	0	BOWL - NI-RI	-4
								BOWL - S.S.	-5

Δ CONSULT FACTORY

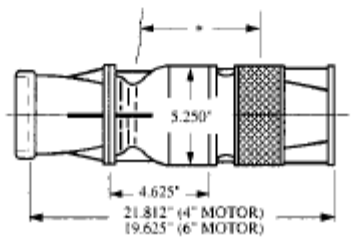

SUBMERSIBLE TURBINE