


MODEL: 950R8
 SIZE: 8"
 RPM: 3450 HP: 30
 CURVE NO: ST1070



STARITE INDUSTRIES, INC.
 Water Equipment Division
 293 SOUTH WRIGHT STREET / DELAVAN, WISCONSIN 53115 / U.S.A.

DATE: DEC. 12, 1978

TOTAL HEAD / FEET

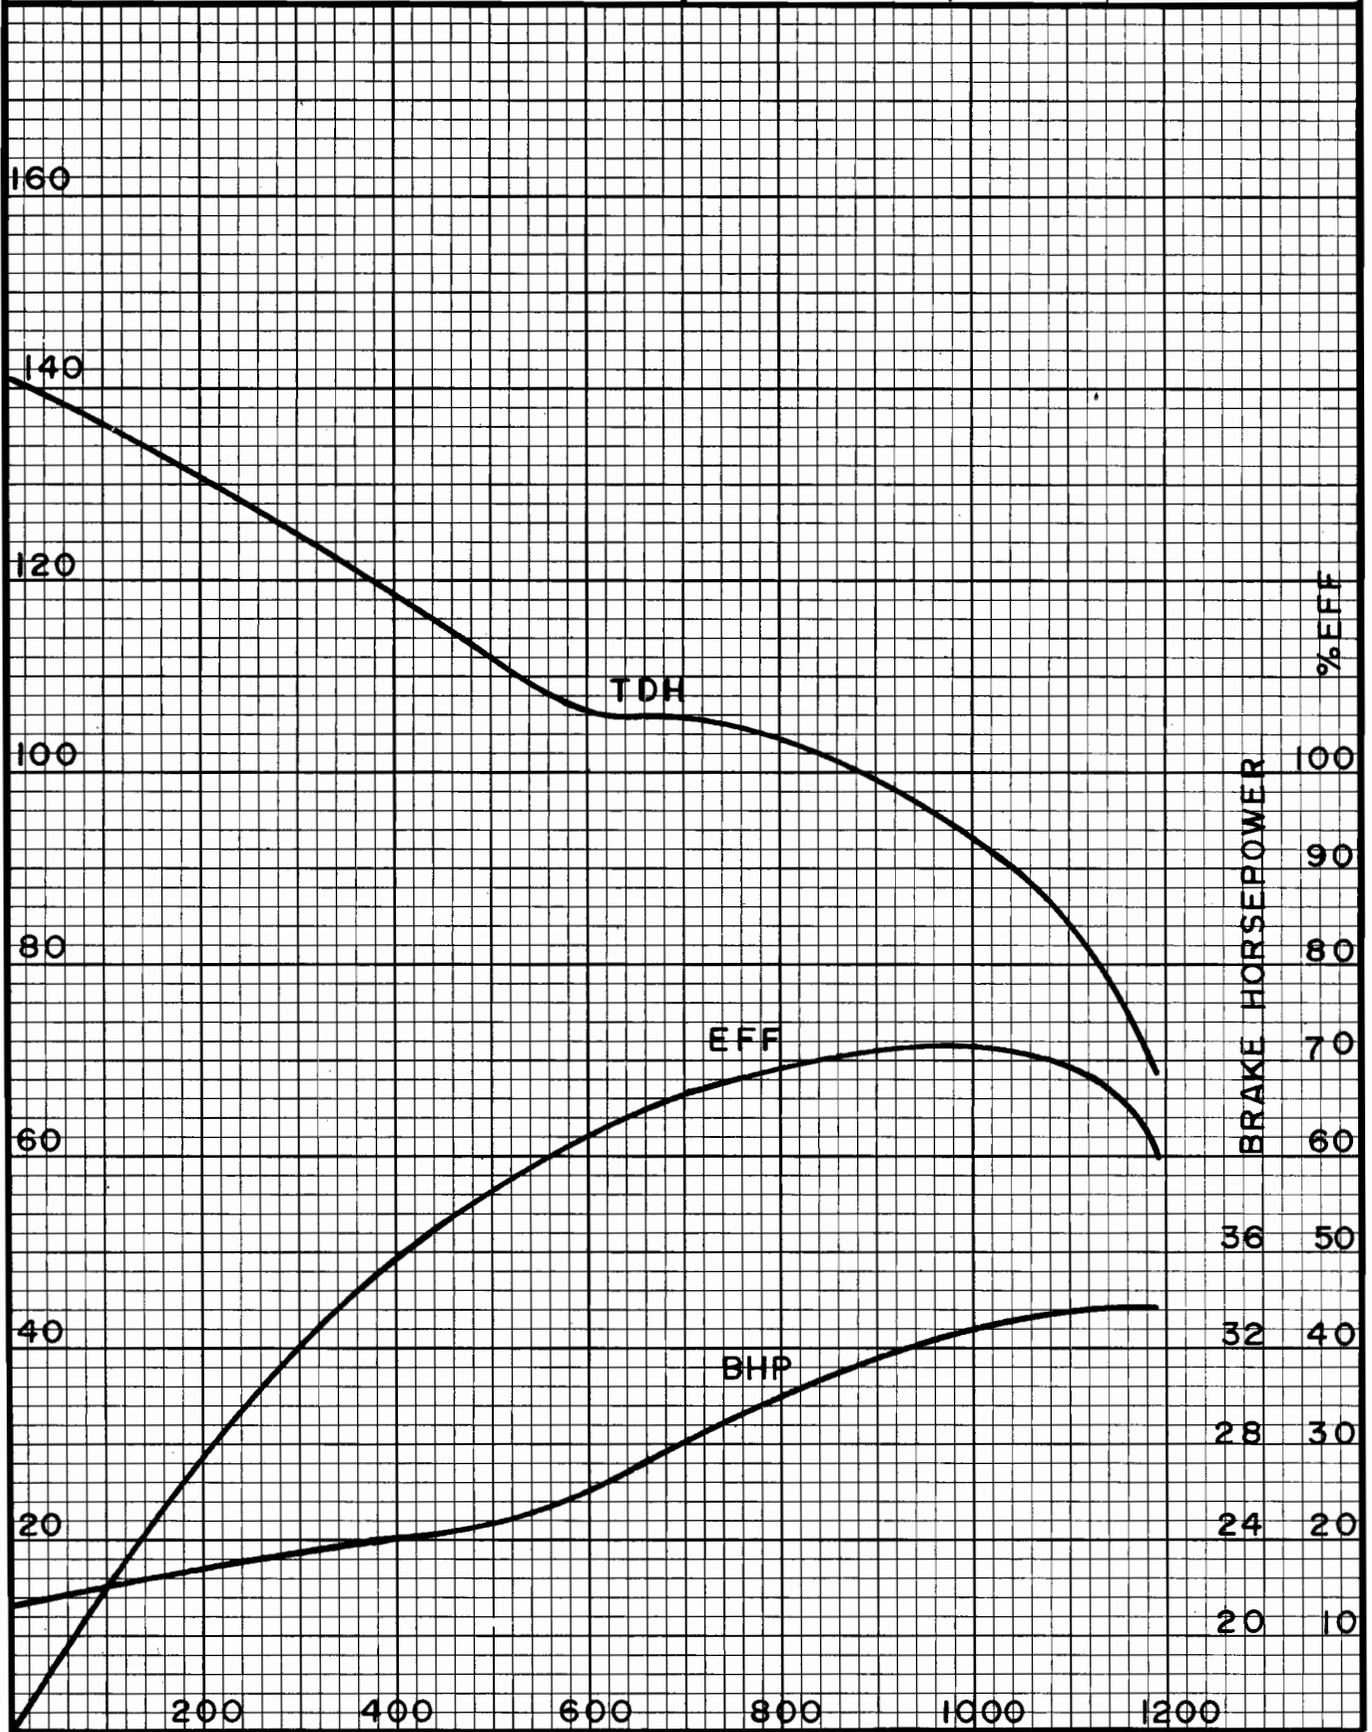

CAPACITY U.S. G.P.M.

DEEP WELL SUBMERSIBLE TURBINE

CURVE No. ST1070

IMPELLER DATA

IMPELLER No. P5-35D
 TYPE Enclosed - Brass
 DIAMETER 5.320 x 26° Underfiled
 EFFECTIVE EYE AREA 12.14 Sq. Inches
 NUMBER OF VANES 7
 THRUST CONSTANT K 4.65 Lbs./Ft. of Head
 WR² _____ Lbs. Ft.²
 WEIGHT 4.4 Lbs.
 EYE FLUID VELOCITY 0.026 Ft./Sec./G.P.M.
 PERIPHERAL VELOCITY 15.05 Ft./Sec./Inch of Impeller Dia.


BOWL ASSEMBLY DATA

BOWL No. P101-50 (C.I.)
 CONNECTION TYPE Screwed
 DISCHARGE TAPPING 6" NPT
 PUMP SHAFT DIA. 1-1/4"
 NUMBER OF STAGES 1

PERFORMANCE DATA

PERFORMANCE CURVE BASED ON 6 " MOTOR
 WITH SPEED OF 3430 RPM AT B.E.P. USE OF
 DIFFERENT SIZE MOTOR, OR DIFFERENT SPEED
 CHARACTERISTIC WILL CHANGE PERFORMANCE.

DIMENSIONS

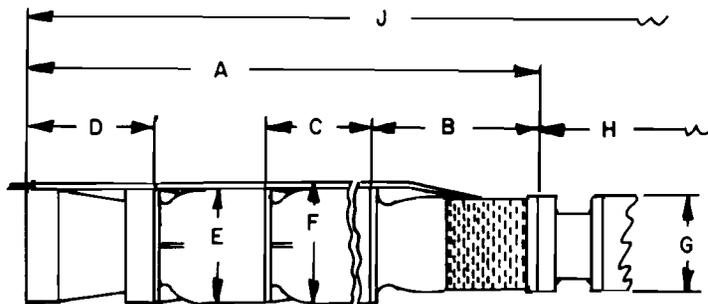

- A-OVERALL LIQUID END LENGTH
- B-SUCTION CONNECTION LENGTH
- C-STAGE LENGTH
- D-DISCHARGE CONNECTION LENGTH
- E-BOWL DIAMETER
- F-DIAMETER ACROSS LEAD GUARD
- G-MOTOR DIAMETER
- H-MOTOR LENGTH
- J-OVERALL PUMP LENGTH-INCLUDING MOTOR

DIMENSION	A	B	C	D	E	F	G	H	J
INCHES	28-1/4	13-3/8	6-3/4	8-1/8	7-3/8	7-15/16	5-1/2	40-9/16	68-13/16

UNIT WEIGHTS - POUNDS

MOTOR SIZE	6"		
PUMP INCLUDING MOTOR	307.5		
LIQUID END ONLY	107.5		