


horizontally split centrifugal pumps

LR-LLR

EYE AREA • 36.7 SQ. IN., MAX. DIA. SOLIDS • 3/4", MAX. SHAFT BHP AT 1770RPM • 50, 1170 • 20

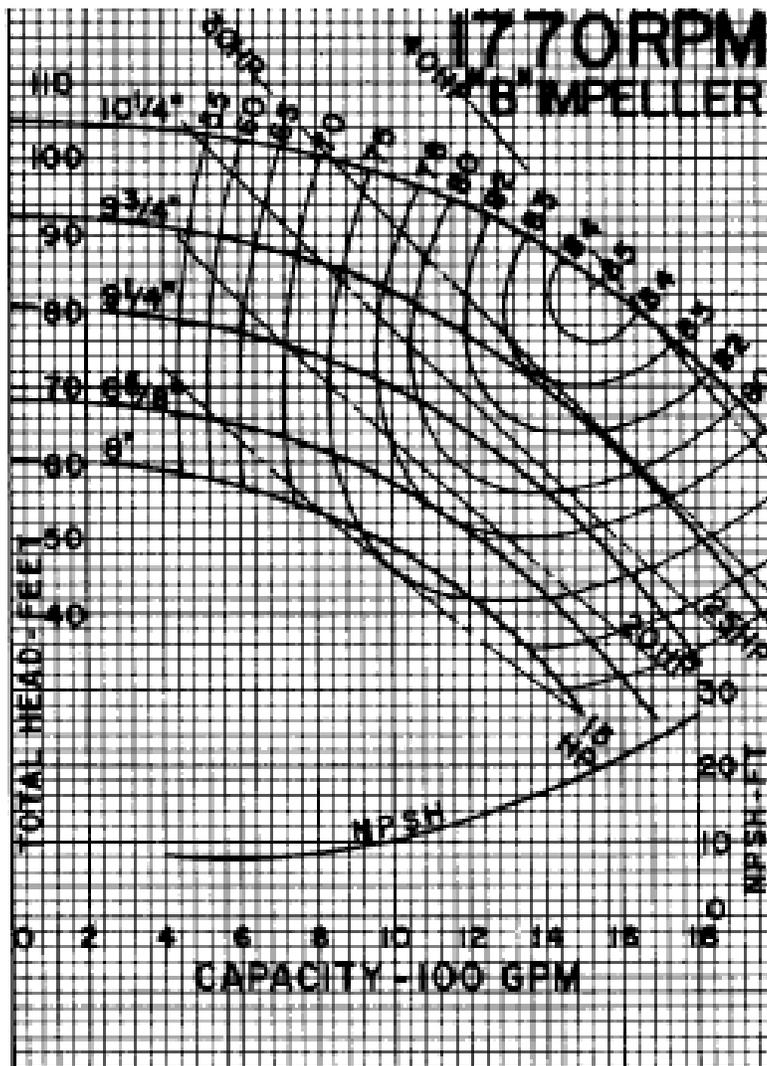


A-7230-RI WORTHINGTON PUMP INC. - RATING CURVE 6LR-10 "B"

Minimum recommended flow - sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.

horizontally split centrifugal pumps

LR-LLR

EYE AREA = 37.6 SQ. IN., MAX. DIA. SOLIDS = 3/4", MAX. SHAFT BHP AT 1770 = 50 1175 = 20

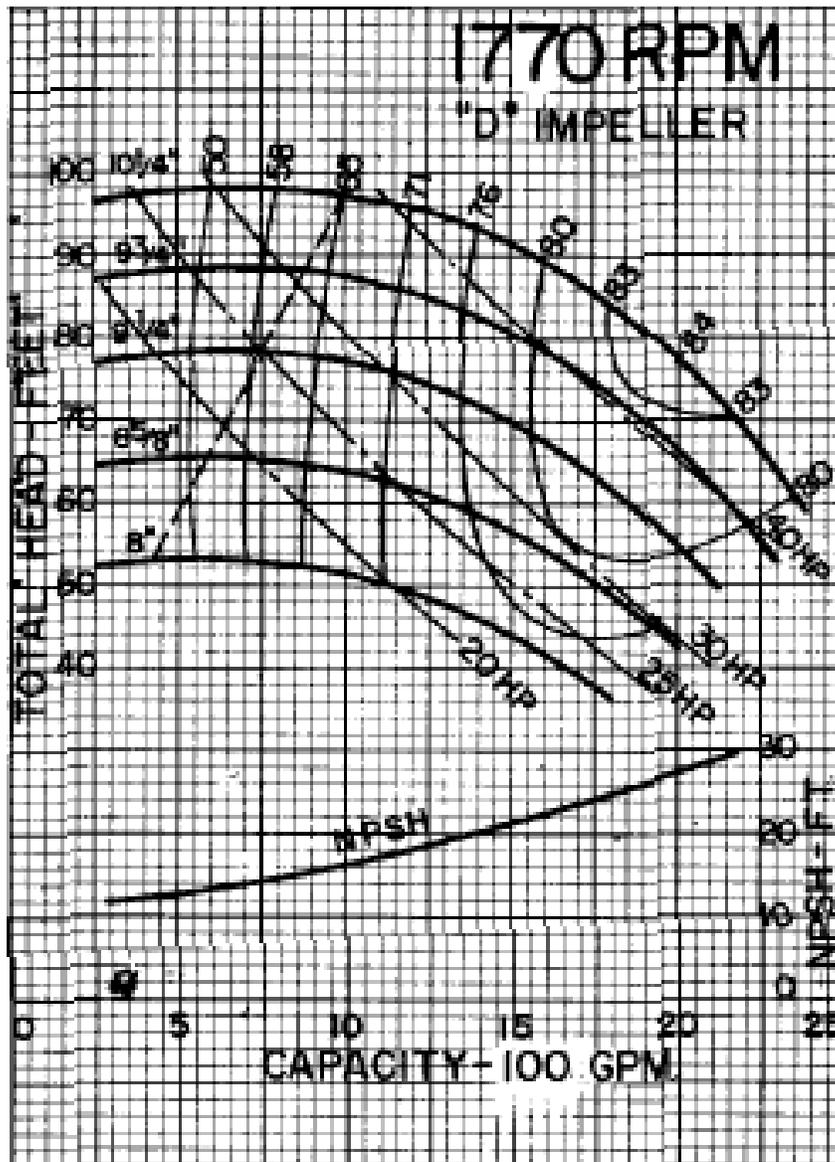

A-7229 R-1 | WORTHINGTON PUMP INC. - RATING CURVE | 6LR-10

Minimum recommended flow - Sustained operation to the left of the slanted broken line could possibly result in shaft breakage due to fatigue.