APRIL 1985

SUPERSEDES 132-26
JAN. 65

MODEL 1¼ W PUMP

SPEED - 1800 RPM
CLOSED IMPELLER

60 HERTZ

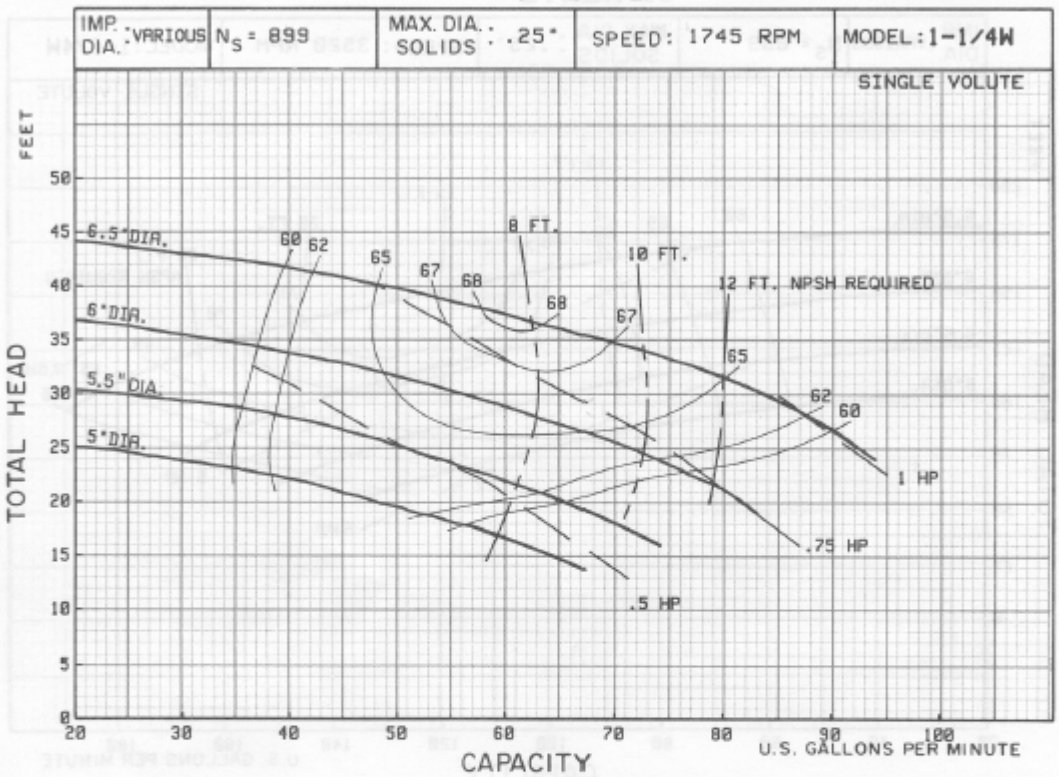

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

HP	MAXIMUM IMPELLER DIAMETER	
	FOR FULL MOTOR LOAD	FOR FULL MOTOR LOAD + 15% S.F.
1	A(6.44")	A+(6.5")
.75	B(5.94")	B+(6.22")
.5	C(5.12")	C+(5.5")

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON