


Column	Nom. Size	Max. GPM ③	"A" Flanged	"B" Threaded	
Optional					
Standard	12"	5000	16.0"	13.75"	
Optional	14"	7000	17.25"	---	
RATINGS					
Max. Pressure ④ = 368 psi					
Impeller and Shaft Weight ⑤ = 130 pounds per stage					
Pump Shaft	Diameter = 2.44 inches				
	Max. hp. ⑥ = 383				
Line Shaft ⑥	Size	1.69	1.94	2.19	2.44
	Max. hp.	137	209	273	383

- ① Minimum submergence required to prevent vortex formation. The submergence needed to provide adequate NPSH to the first stage impeller may be greater or less than shown. The larger of the two values must be used to determine actual minimum allowable submergence.
- ② Location of eye of first stage impeller. Use to calculate NPSH. This is also the minimum priming submergence. See note 1.
- ③ Maximum GPM exceeds recommended 8 ft. maximum head loss per 100 ft. of column. See sheet 302 for column friction losses. See Sheet 306 for additional Column information.
- ④ Basis class 30 cast iron construction.
- ⑤ Use to calculate thrust load of pump.
- ⑥ Basis C-1045 or 410 S.S. shaft material at maximum thrust. See sheet 301A. Use rating factors for other materials.

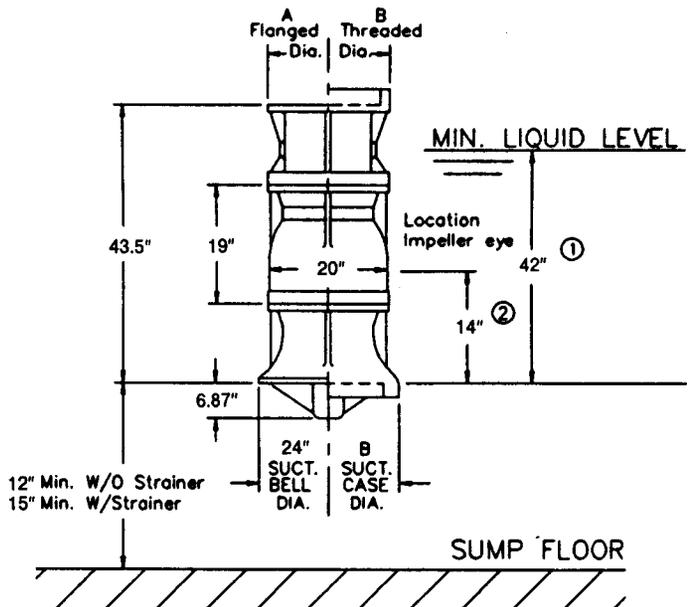

NOTE: HAVE YOU CORRECTED PERFORMANCE FOR MATERIALS OF CONSTRUCTION? SEE SHEET 308.