PACO

PERFORMANCE CURVES
END SUCTION CENTRIFUGAL PUMPS
TYPE E ENGINE DRIVE

A2b.3
4/79

VARIOUS RPM

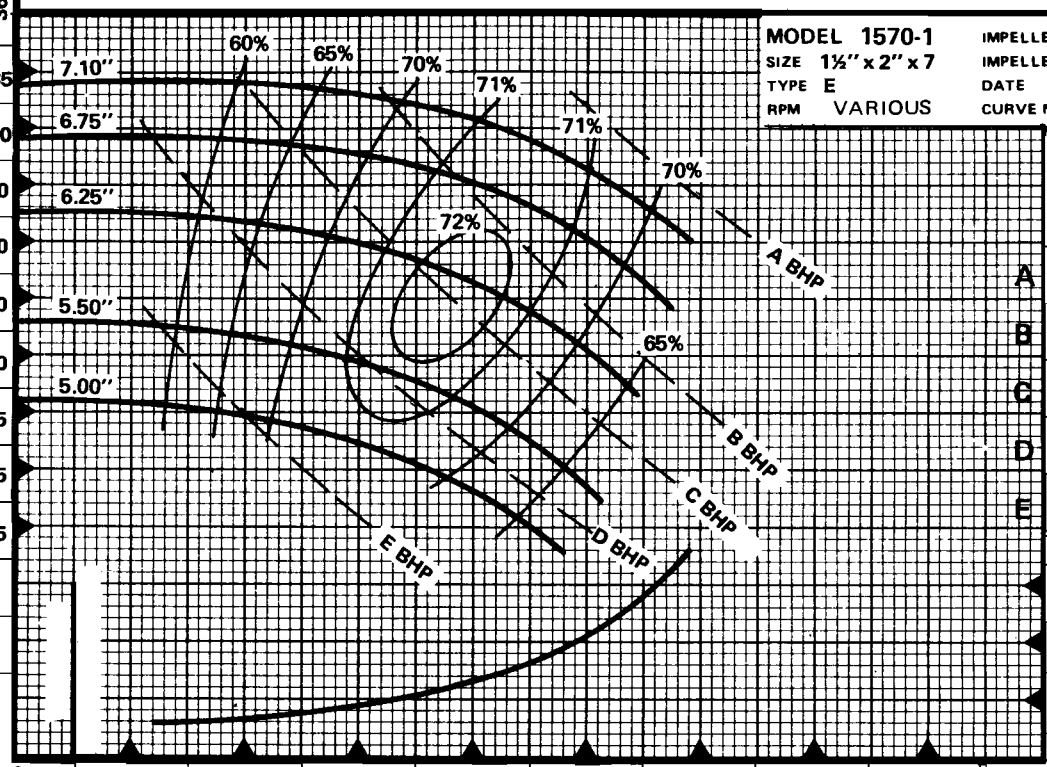

HEAD - FT

RPM	RPM	RPM	2400 RPM	2800 RPM	3200 RPM	3600 RPM
			105	140	185	235
			95	130	170	210
			85	115	150	190
			75	105	135	170
			65	90	120	150
			60	80	100	130
			50	65	85	105
			40	55	70	85
			30	40	50	65

BHP

	3600 RPM	3200 RPM	2800 RPM	2400 RPM	RPM	RPM	RPM
A	16.3	11.5	7.7	4.8			
B	10.9	7.6	5.1	3.2			
C	8.1	5.7	3.8	2.4			
D	5.4	3.8	2.6	1.6			
E	3.3	2.3	1.5	1.0			

NPSHR FT

	3600 RPM	3200 RPM	2800 RPM	2400 RPM	RPM	RPM	RPM
	32	25	19	14			
	21	17	13	9			
	11	8	6	6			

3600 RPM	41	82	123	165	206	247			
3200 RPM	37	73	110	146	183	219			
2800 RPM	32	64	96	128	160	192			
2400 RPM	27	55	82	110	137	165			

IMP. DIAM.	MAX. RPM
7.10	3600
6.75	3600
6.25	3600
5.50	3600
5.00	3600

U.S. GALLONS PER MINUTE

PACO®
PACIFIC PUMPING COMPANY
DIVISION OF BALTIMORE AIRCOIL COMPANY, INC. A MERCK & CO., INC SUBSIDIARY
P.O. Box 12924 • 845-92nd Ave. • Oakland, CA 94604

PACIFIC PUMPING COMPANY OF CANADA
DIVISION OF BALTIMORE AIRCOIL INTERAMERICAN CORPORATION
35 Sinclair Ave. • Georgetown, Ontario, Canada

Plant Locations: Oakland, CA • Dallas, TX • Los Angeles, CA • Portland, OR • Milford, DE • Georgetown, Canada

© 1979 PACO, Division of Baltimore Aircoil Company, Inc. A Merck & Co. Inc. Subsidiary

PACO

PERFORMANCE CURVES
END SUCTION CENTRIFUGAL PUMPS
TYPE L
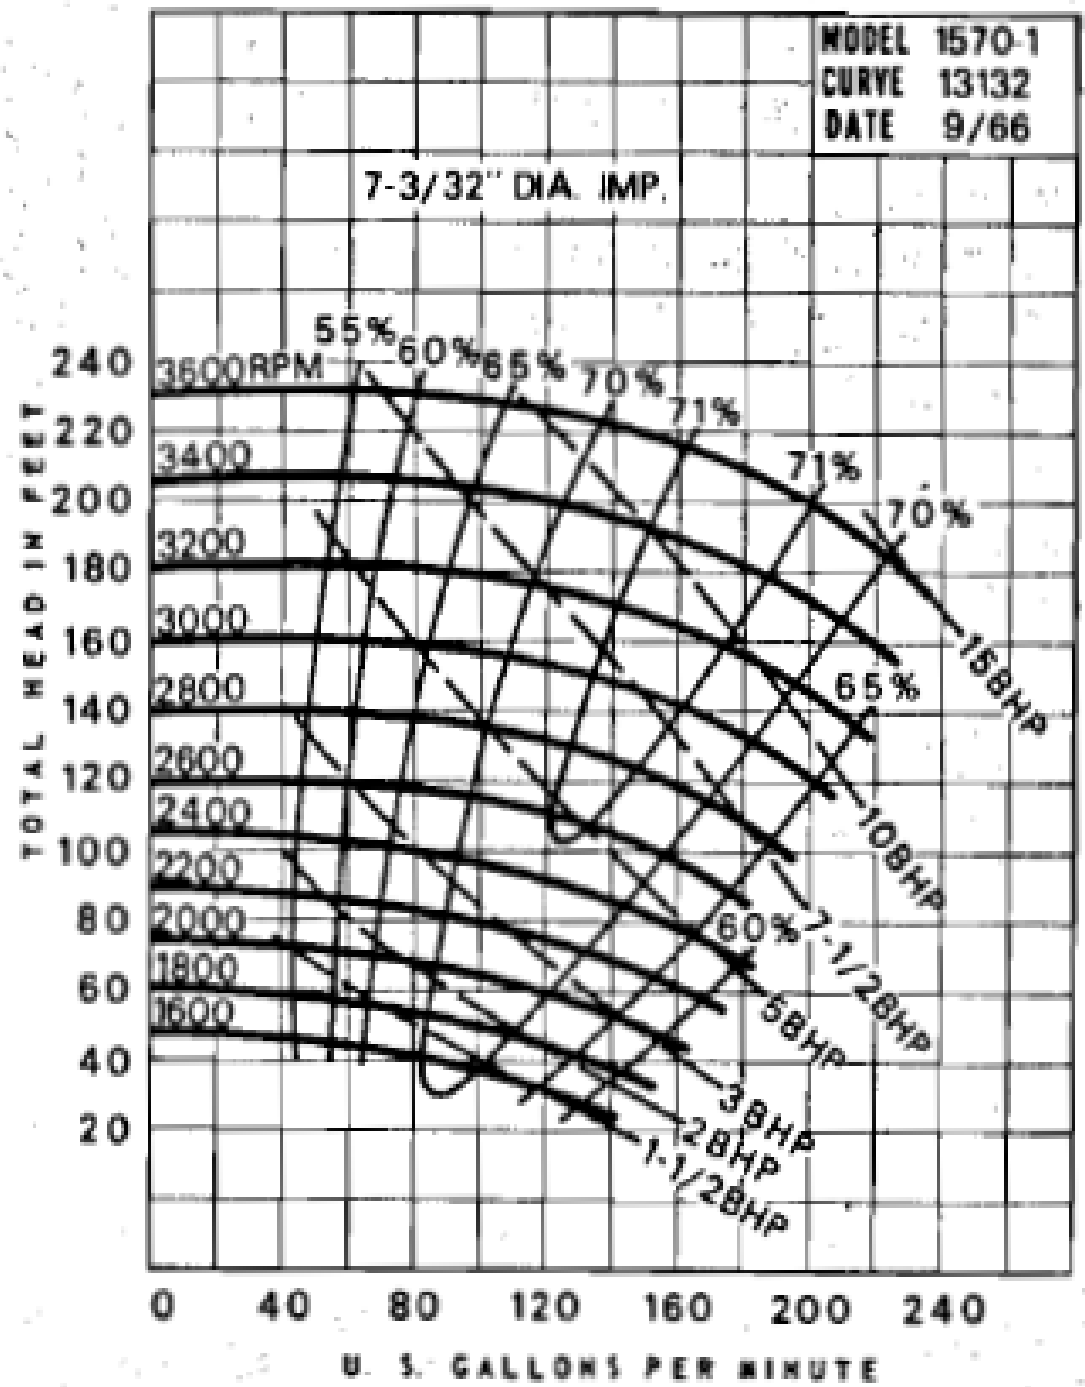
VARIOUS SPEEDS